

**VELUX®**

# Product Catalogue

Republic of Ireland Price List (excludes VAT)  
Valid from 1st February 2022  
[velux.ie](http://velux.ie)





#### Contact us

If you need more information or technical support, we are here to help.

Telephone : 01 816 1620  
Email: [sales@velux.ie](mailto:sales@velux.ie)

Website: [velux.ie](http://velux.ie)



# Contents

- 4 Transforming spaces
- 5 It's our nature
- 6 Why VELUX®
- 8 Your guide to getting the right solution
- 9 Our roof window features at a glance
- 10 Standard glazing
- 11 Special glazing
- 12 News 2022
- 133 Accessories
- 137 Practical information
- 142 Size and replacement

21 Intelligent Home Control

27 Roof windows

49 Combi solutions

61 Flat roof windows

79 Sun tunnels

85 Installation and flashings

103 Blinds and shutters

# Transforming spaces into favourite places

We all look for the perfect place where we can relax, recharge and feel content – or even be more productive. And often, without us noticing, it is a place filled with daylight and fresh air.

For over 80 years, the VELUX Group has helped people transform spaces using daylight and fresh air through the roof. By creating brighter, healthier, more sustainable places to live, work, learn and play we enable a better everyday life for people around the world.

Our award-winning windows can fit any roof – flat, pitched, old or new – and can

be accessorised with VELUX blinds and shutters. You can even add more space to your home with a VELUX CABRIO® balcony or upgrade your roof windows to VELUX ACTIVE with NETATMO, intelligent home solution.

VELUX roof windows are built to last. We take pride in our craft and high quality products. But what you may not

see is that VELUX roof windows are part of an ambitious sustainability strategy. We plan to capture the VELUX Group's historical carbon footprint, alongside dramatically reducing future emissions to make us lifetime carbon neutral by 2041.

In other words, there are several reasons to take a deep breath and look out of a VELUX roof window.



## It's our nature

**With our Sustainability Strategy 2030, we have made a commitment to capture our historical CO<sub>2</sub> emissions and reach carbon neutrality by 2041 – our 100-year anniversary.**

Acting sustainably has always been in our nature at VELUX. That's why in 2020 we introduced a pioneering new commitment as we enter what the UN describes as the Decade of Action. Our plan is to dramatically reduce our future carbon emissions in line with science, and at the same time capture our historical carbon footprint all the way back to the time of our founding in 1941, by

protecting and restoring forests. At our centennial anniversary in 2041, we will be Lifetime Carbon Neutral.

To capture our historical carbon footprint, we have started a 20 year-long partnership with WWF (World Wide Fund for Nature) on forest and nature projects around the world.

Going forward, we will drive down our future carbon emissions by accelerating our investments in energy efficiency, shift to 100% renewable electricity, as well as substantially change the way we specify and purchase materials for our products. In short, if you buy a VELUX roof window in 2020 and a similar window in 2030, the 2030 window will contain 50% less CO<sub>2</sub>. By 2030 we will be a carbon neutral company and will have halved carbon emissions across our entire value chain.

When you buy a VELUX solution, you are part of this journey. You will also automatically find yourself at the forefront of roof window technology that creates better and healthier homes. For example, by applying smart sensor-based solutions to a roof window you can benefit from a self-regulating indoor climate for sustainable living indoors.

We all need a healthy home – including Mother Nature. With our new sustainability strategy, we are doing everything we can to make that happen.

# Why VELUX®

All over the world, VELUX roof windows contribute to healthy indoor environments by letting in fresh air and daylight. Here are five other good reasons why you should consider an original VELUX roof window.

## 80 years of innovation

When the first VELUX roof window transformed a dark attic into a liveable space, it was a revelation. That was 80 years ago but our passion for daylight, fresh air and better living environments continues to this day and can be seen in constant innovation and award-winning design.



## Extensively tested

VELUX products are designed to meet the highest quality standards and are thoroughly tested. For example, all roof windows are tested to withstand a year's worth of rainfall in just 15 minutes. They are also opened and closed 25,000 times – the equivalent of opening and closing the window every day for 68 years!


## 10-year guarantee

We strive to ensure the quality of all VELUX products and accessories lives up to our customers' exacting standards. However, in the rare event that you experience a problem with your VELUX roof window, we offer a 10-year guarantee on all core products. On blinds, shutter and electrical products we offer up to a 3-year guarantee. We also offer up to 25 years' availability on spare parts.



## Here for you

When you need support, our team is never more than a phone call away. The expert team are trained to give you as much in-depth assistance on planning, installation and aftercare as you need. Call us on 01 816 1620.

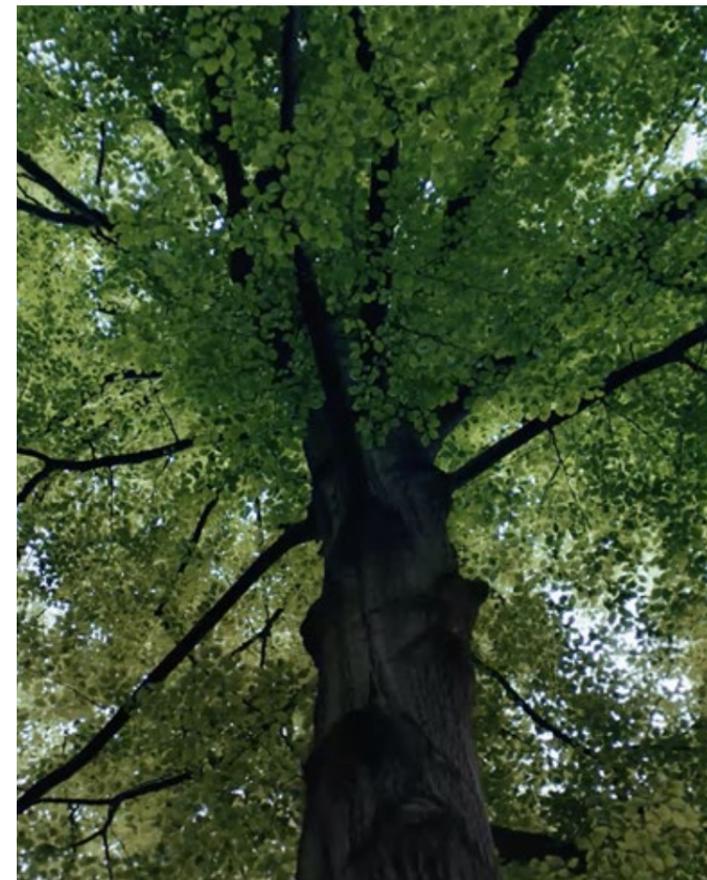

## Focused on sustainability

Sustainability is ingrained in everything we do. Not only do VELUX roof windows save energy and last for generations, but our production facilities strive to achieve zero waste, source responsibly and continually reduce environmental impact.

# Your guide to getting the right solution

Natural light is essential to your wellbeing. Window size, as well as the number of windows, is fundamental to how your space will look and feel.

10°-90°



0°-15°



## 1. Identify roof pitch

VELUX roof windows can be installed in both pitched and flat roofs. Use the tabs to find the roof window type that best suits your project.



## 5. Choose roof window operation

Most VELUX roof windows can either be operated manually or automatically via a remote switch. Mains-powered and solar operations are available, perfect for out-of-reach areas.

20%



15 m<sup>2</sup> x 20% = 3 m<sup>2</sup> glazing

## 2. Get the right amount of daylight

For optimal comfort, we recommend that the glazed areas represent 20% of the overall floor space. Enter your room dimensions at [velux.ie/daylightcalculator](http://velux.ie/daylightcalculator)



## 6. Choose installation products

VELUX provide a range of flashings to suit your roofing material. They are designed to provide a durable, 100% watertight and weather-proof seal between the window and the roof.



## 3. Choose glazing

Get the glazing option that's right for your space – from extra noise reduction to diminish outside street noise to triple-glazing for enhanced thermal efficiency. Find out more on page 10.



## 7. Choose daylight control and heat protection

Select interior blinds for light dimming or blackout. Choose from a wide range of blind types and colours to match the room type and style. Select exterior products for heat protection and blackout. This will keep your home cool on hot days and nights. See full range of manual and remote operated blinds and shutters from page 103.


White polyurethane  
White painted  
Clear lacquered




## 4. Choose interior finish

VELUX roof windows come in a variety of materials to match all interior styles. Find the perfect interior finish for your project and your room.

# Our roof window features at a glance

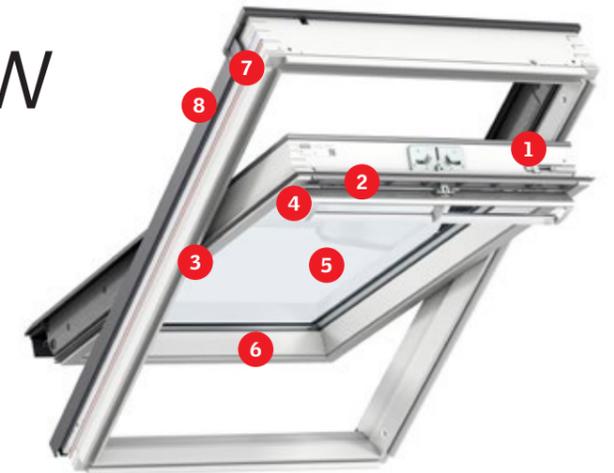

1. Roof window can be rotated 180° and secured in place with **built-in barrel bolt** for easy cleaning from the inside.

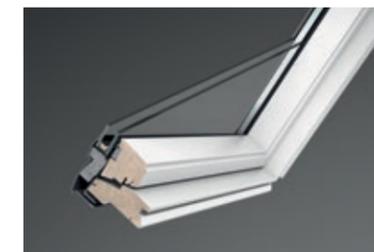

5. All **standard glazing** comes with premium features like safety lamination, toughened glass, UV filter and our unique rain noise reduction.



2. **Ventilation bar** lets fresh air into your home even when roof window is closed.



6. **VELUX ThermoTechnology™** transfers less energy and keeps your home warm.

ThermoTechnology™



3. High quality **pivot hinges** for smooth operation.




7. **Simple red and blue line bracket** system differentiates between standard and recessed installation.



4. Straightforward blind installation with our patented **mounting brackets**.



8. **Click-on covers** make your installation easier, faster and safer.



# Standard glazing




Made for

## Comfort

### Glazing 70

Provides great comfort with all the standard features, including new rain noise reduction, laminated safety glass, protection from UV rays, and extra-strength toughened glass.



Thermal transmittance window	Uw 1.3	●●
Thermal transmittance glazing	Ug 1.0	●●●●
Energy transmittance	g 0.46	●●
Sound insulation	35 dB	●●
Layers of glass	2	




Made for

## Better comfort

### Glazing 68

3-layer glazing that offers all features of the Comfort Glazing 70 and better energy-efficiency. Reduces the feeling of cold that comes from a window during winter.



Thermal transmittance window	Uw 1.1	●●●●
Thermal transmittance glazing	Ug 0.7	●●●●●●
Energy transmittance	g 0.49	●●
Sound insulation	35 dB	●●
Layers of glass	3	




Made for

## Well-being

### Glazing 66

3-layer glazing that minimises the feeling of cold and blocks outside noise so you can feel warm and relaxed. Easy-to-clean and anti-dew coatings provide clearer views.



Thermal transmittance window	Uw 1.0	●●●●
Thermal transmittance glazing	Ug 0.6	●●●●●●
Energy transmittance	g 0.44	●●
Sound insulation	37 dB	●●●●
Layers of glass	3	




Made for

## The best experience

### Glazing 67

Our best performing 3-layer glazing provides the ultimate combination of thermal efficiency and noise reduction to deliver optimal energy-efficiency and indoor comfort.



Thermal transmittance window	Uw 0.83	●●●●●●
Thermal transmittance glazing	Ug 0.4	●●●●●●
Energy transmittance	g 0.44	●●
Sound insulation	38 dB	●●●●
Layers of glass	3	

# Special glazing




Made for

## Heat protection

### Glazing 69

This 3-layer glazing filters out the heat from the sun's rays to keep your home more comfortable. High thermal efficiency prevents the feeling of cold that comes from a window during winter.



Thermal transmittance window	Uw 1.1	●●●●
Thermal transmittance glazing	Ug 0.7	●●●●●●
Energy transmittance	g 0.27	●●●●●●
Sound insulation	35 dB	●●
Layers of glass	3	




Made for

## The best noise reduction

### Glazing 62D

Our highest-performing noise reduction glazing ever. The 2-layer glazing offers excellent reduction of sound and reduces street-noise to just a whisper. Great for homes near busy areas.



Thermal transmittance window	Uw 1.3	●●
Thermal transmittance glazing	Ug 1.0	●●●●
Energy transmittance	g 0.53	●●
Sound insulation	44 dB	●●●●●●
Layers of glass	2	




Made for

## Noise reduction & comfort

### Glazing 62

This noise reduction window with 3-layer glazing provides up to a full 42 dB of sound reduction together with high thermal insulation. Great for homes that need additional protection from outside noise and colder weather.



Thermal transmittance window	Uw 0.92 - 1.0	●●●●
Thermal transmittance glazing	Ug 0.5	●●●●●●
Energy transmittance	g 0.47	●●
Sound insulation	42 dB	●●●●●●
Layers of glass	3	




Made for

## Extra security

### Glazing 70Q

This certified security window features 2-layer glazing and offers the highest burglary resistance on the market. Provides an array of security features to prevent attempts of external force and breakage.



Thermal transmittance window	Uw 1.3	●●
Thermal transmittance glazing	Ug 1.0	●●●●
Energy transmittance	g 0.45	●●
Sound insulation	35 dB	●●
Layers of glass	2	




Made for

## Better comfort in low pitch roofs

### Glazing 15

3-layer glazing for low pitch roofs (GBL), offering all VELUX premium standard features and better energy-efficiency. Reduces the feeling of cold that comes from a window during winter.



Thermal transmittance window	Uw 1.1	●●●●
Thermal transmittance glazing	Ug 0.7	●●●●●●
Energy transmittance	g 0.50	●●
Sound insulation	35 dB	●●
Layers of glass	3	

## Glazing features

**Rain noise reduction**  
Enjoy a good night's sleep without being awoken by heavy rain noise on the roof window.

**Safety lamination**  
Prevents glass from falling into the room in case of accidental breakage.

**Toughened glass**  
Adds strength to the outer pane protecting against external environmental factors.

**UV filter**  
Protects your interior furnishings from fading due to the sun's harmful UV rays.

**Easy-to-clean**  
Dirt-repellent coating lets you spend less time cleaning and more time enjoying the view.

**Anti-dew**  
Hydrophobic coating reduces the amount of dew that can form on the outside for a clearer view.

- Good
- Very good
- Excellent
- Best




# Control at your fingertips

Introducing the new VELUX App Control and VELUX Touch.

With VELUX App Control and VELUX Touch, you have different ways to control your VELUX INTEGRA® roof windows, blinds and shutters. VELUX Touch is ideal for simple in-house control while VELUX App Control gives you control on the go, from everywhere.

News  
VELUX Touch available from autumn 2022

**VELUX App Control**  
Wherever you are, the app gives you full control of all your VELUX INTEGRA® products straight from your phone. With a single swipe you can open and close your roof windows, blinds and shutters. You can also group your VELUX electric products together for extra convenience.

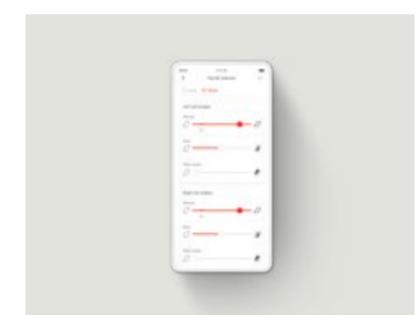

**VELUX Touch**  
This single control solution works for multiple VELUX INTEGRA® roof windows, blinds and shutter products in your home. Take it with you from room to room so it is always within easy reach. Alternatively, keep it in the handy wall mount.



# Transform your room with more light

New variants

Wherever it's installed, the VELUX 3-in-1 creates a stunning effect that can transform any room

Building on the VELUX legacy, the 3-in-1 gives you even better daylight and fresh air with more flexibility. Its single frame with three sashes and slimmer profiles maximise views, while ensuring a simple and safe installation process.

At the same time, the 3-in-1 delivers unbeatable value for money by offering three roof windows for the price of two comparable roof window sizes.

---

## **3-in-1, Manual, top-hung**

The top-hung 3-in-1 gives you an even better view and a balcony-like feeling of space. Page 40

---

## **3-in-1, VELUX INTEGRA® solar roof window**

Solar-powered and remote-controlled for extra convenience. The ideal solution for uncompromised control. Page 42

---

## **Shutters, awnings and blinds for 3-in-1**

A full assortment of shutters, awnings, and blinds are available for VELUX 3-in-1 windows to control light and protect from exterior heat, improving indoor comfort. Page 128



New generation

# Bigger, better, brighter

Now there are even more ways to add more daylight to homes with flat roofs

Dramatically increase the amount of daylight and add maximum wow factor to your home with the new generation of VELUX glass rooflights for flat roofs. The new glass rooflight range brings in more daylight than ever before through its minimalistic and elegant glass-to-edge design.

As a new addition to the range, the glass rooflights are now available in larger sizes up to 200 x 100 cm for even more daylight and impact.

Available as fixed, electric, or solar-powered variants.

## Maximum daylight

New design provides up to 52% more daylight\*.

## State-of-the-art design

Minimalistic design blends seamlessly into the interior and exterior of modern homes.



## Superb indoor comfort

Available with double or triple glazing for excellent energy performance. Combine with blackout blind for light control or anti-heat blind for heat protection. Add VELUX App Control for smart control of your rooflight from your phone.

\* Daylight area. Compared to CFP/CVP 6060

# News

New bigger sizes up to 200 x 100 cm available from summer 2022



New generation

# News

Solar-powered  
variant available from  
autumn 2022

# Hello sunshine

## Introducing the new VELUX solar-powered glass rooflight

Add the daylight, style and convenience of a vented glass rooflight without the need to install any cables or wires. Part of our new generation of glass rooflights, this new solar variant is fully powered by the sun and can be installed in any flat roof home. Experience the indoor comfort that comes from added ventilation and heat extraction in a self-powered, sustainable and easy-to-install solution.

The rooflight comes with a pre-paired wall switch for convenient operation and can also be controlled via your smart phone with VELUX App Control. If it rains, the rain sensor will automatically close the roof window. And to shade from the sun, simply add solar-powered blinds.

### All you need to know

- No wiring needed
- No sun? No problem! The battery will also charge in cloudy weather
- Pre-paired wall switch included
- Combine with solar-powered blinds for a complete solution
- Fully compatible with VELUX App Control and VELUX ACTIVE with NETATMO.





# Intelligent Home Control

Unlock the full potential of your electric roof windows, blinds and shutters with VELUX Intelligent Home Control – the range of smart control solutions that empower you to take control of your indoor comfort with ease, while enjoying the full benefits of daylight and fresh air.

---

**VELUX Touch** Page 23

---

**VELUX App Control** Page 24

---

**VELUX ACTIVE with NETATMO** Page 25



# The range of Intelligent Home Control

We offer a complete range of intelligent home controls that cover everyone's needs. From controls for simple operation of VELUX INTEGRA® products, to a fully automated solution for optimal indoor climate, our portfolio has something for everyone.



	VELUX Wall Switch	VELUX Touch	VELUX App Control	VELUX ACTIVE with NETATMO
Product use	Pre-paired for easy control	Indoor comfort at your fingertips	Control your indoors from anywhere	Everyday home improvement
What's included	<ul style="list-style-type: none"> <li>Simple control of one VELUX INTEGRA® product</li> </ul>	<ul style="list-style-type: none"> <li>Simple control of multiple VELUX INTEGRA® products</li> </ul>	<ul style="list-style-type: none"> <li>Smart control of multiple VELUX INTEGRA® products from your phone</li> </ul>	<ul style="list-style-type: none"> <li>Smart control of multiple VELUX INTEGRA® products from your phone, with sensor-based automation for better indoor climate</li> </ul>
Connectivity	• N/A	• N/A	• Wi-Fi	• Wi-Fi
VELUX Compatibility	• All VELUX INTEGRA® roof windows, blinds and shutters	• All VELUX INTEGRA® roof windows, blinds and shutters	• All VELUX INTEGRA® roof windows, blinds and shutters	• All VELUX INTEGRA® roof windows, blinds and shutters
Compatible with	• N/A	• N/A	• Apple • Google	• Apple • Google
Price	• Included in all VELUX INTEGRA® product purchases	• €92	• €104	• €214



## VELUX Touch

Indoor comfort at your fingertips

VELUX Touch makes it easy to feel perfectly comfortable at home by ensuring every VELUX INTEGRA® roof window, blind and shutter is always within easy reach. Let in a cool breeze when you need a breath of fresh air, shield your home from the midday sun or draw the blinds for movie night – all with a single remote.

- Remote operation within the home
- Easy grouping of products
- Simple control of multiple VELUX INTEGRA® products
- Quick and easy access to frequently used features
- Accessible to all household members
- Ventilation timer for quick airing
- Not dependent on Wi-Fi

### Includes

- 1 VELUX Touch

### Details

- A perfect choice for simple, multiple product operation, that doesn't require Internet connection.

VELUX Touch will be available from autumn 2022.

VELUX Touch		
KLR 300	VELUX Touch	92

All prices in EUR (€)



**Includes**

- VELUX App Control
- 1 VELUX App Control Gateway

**Upgrade to VELUX ACTIVE with NETATMO**

- You can always upgrade from VELUX App Control to our full indoor climate solution, VELUX ACTIVE with NETATMO, to automatically keep your home feeling fresh and healthy at all times.
- Upgrading is easy and only requires the VELUX ACTIVE indoor climate sensor.



**Includes**


- VELUX ACTIVE with NETATMO app
- 1 VELUX ACTIVE Indoor Climate Sensor
- 1 VELUX ACTIVE Departure Switch
- 1 VELUX ACTIVE Gateway

# VELUX App Control

Control your indoors from anywhere

VELUX App Control gives you full control of all your VELUX INTEGRA® products right from your phone. Open and close your roof windows, blinds and shutters with a single swipe or group your VELUX INTEGRA® products for combined control. Share VELUX App Control with the whole household and keep every roof window within reach – both at home and on the go. Take control of your home.

- Compatible with VELUX INTEGRA® roof windows, blinds and shutters
- Personal scheduling features
- Full control from smartphone app
- Easy operation with voice control
- Built-in data security
- Easy grouping of products

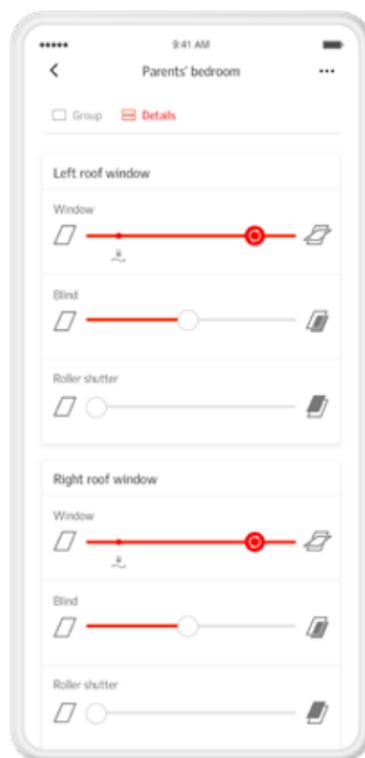

VELUX App Control



iPhone, iPod and iPad are registered trademarks of Apple Inc. Registered in the US and other countries. HomeKit is a trademark of Apple Inc. Google and Google Play are trademarks of Google LLC.

VELUX App Control		
KIG 300 EU	VELUX App Control Internet Gateway	104

Visit [velux.ie/velux-app-control](http://velux.ie/velux-app-control) to discover more.

All prices in EUR (€)

# VELUX ACTIVE with NETATMO

Everyday home improvement


Upgrade with VELUX ACTIVE to a home that automatically regulates your indoor climate and lets you control everything with a simple tap on your smartphone. VELUX ACTIVE gives you the option to seamlessly control your VELUX INTEGRA® products by smartphone or voice commands from anywhere at any time. You can also simply let the system rely on the built-in indoor climate sensors and live weather forecast for automatic operation providing a better indoor climate for you and your household.

- Compatible with VELUX INTEGRA® roof windows, blinds and shutters
- Sensor-based ventilation
- Automatic heat protection
- Personal scheduling features
- Full control from smartphone app
- Easy operation with voice control
- Built-in data security

VELUX ACTIVE		
KIX 300	VELUX ACTIVE package	214
Additional components		
KLA 300	VELUX ACTIVE indoor climate sensor	86
KLN 300	VELUX ACTIVE departure switch	46

Visit [velux.ie/active](http://velux.ie/active) to discover more.

All prices in EUR (€)

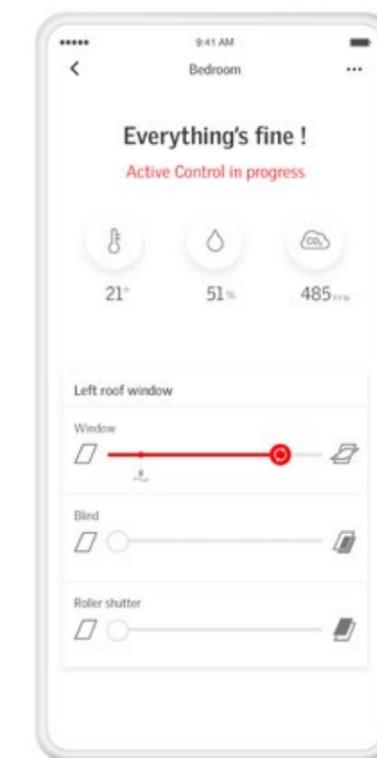

VELUX ACTIVE with NETATMO app



iPhone, iPod and iPad are registered trademarks of Apple Inc. Registered in the US and other countries. HomeKit is a trademark of Apple Inc. Google and Google Play are trademarks of Google LLC.



# Roof windows

---

## Mains and solar powered roof windows

Page 28

VELUX INTEGRA® centre-pivot  
VELUX INTEGRA® top-hung

---

## Manual roof windows

Page 32

Manual, centre-pivot  
Manual, top-hung  
Manual, centre-pivot for low-pitch roofs

---

## 3-in-1 roof windows

Page 38

Manual, centre-pivot  
Manual, top-hung  
VELUX INTEGRA® centre-pivot

---

## Roof balcony

Page 44

---

## Cold room

Page 46

Side opening

---

## Smoke ventilation sloped roof window


Page 47

---


## Conservation

Page 48

Top-hung and Centre-pivot

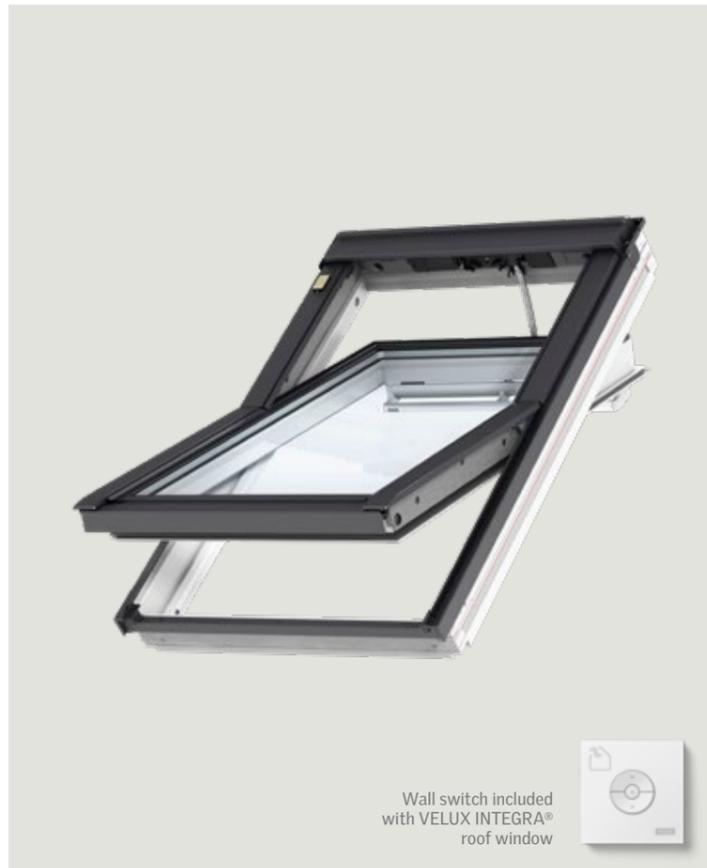

### Roof pitch



### Interior finish options



**White polyurethane**  
Maintenance-free and moisture resistant\*



**White painted**  
Bright white finish for modern interiors

\*Recommended for humid rooms like bathrooms and kitchens.

### Glazing options

	Double glazing --70	Triple glazing --68	Triple glazing --66
Rain noise reduction	✓	✓	✓
Safety lamination	✓	✓	✓
Toughened glass	✓	✓	✓
UV filter	✓	✓	✓
Easy-to-clean			✓
Anti-dew			✓
Thermal transmittance of glazing (U <sub>g</sub> -value)	1.0	0.7	0.6

Read more about glazing specifications on page 10.

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

### Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

\*Read more on page 21.

# VELUX INTEGRA® centre-pivot

Mains and solar powered, GGL and GGU

The ideal solution for ultimate convenience and comfort in your home. VELUX INTEGRA® roof windows offer one touch remote control and come complete with a wireless wall switch. An integrated rain sensor will automatically close the roof window in the event of rain. They are available in either mains or solar powered. VELUX INTEGRA® roof windows are our recommended choice for modern and carefree living with fresh air and great indoor comfort.

- Fully integrated motor which runs almost without a sound
- Convenient operation through a wireless wall switch
- Automatic rain sensor that closes the roof window when it rains
- Provides fresh air, better indoor comfort and home security
- Get VELUX App Control and operate more products from one unit\*




External frame sizes (w×h) cm	U <sub>w</sub> -value W/m² K	CK02 55×78	CK04 55×98	CK06 55×118	FK06 66×118	MK04 78×98	MK06 78×118	MK08 78×140	PK08 94×140	SK06 114×118	UK04 134×98


White polyurethane												
Product	Power	U <sub>w</sub>	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK08	SK06	UK04
GGU 007021U	Mains powered	1.3	811	834	853	905	872	933	989	1,087	1,106	1,078
GGU 006821U	Mains powered	1.1	913	942	966	1,030	989	1,065	1,135	1,258	1,282	1,247
GGU 006621U	Mains powered	1.0	998	1,033	1,060	1,135	1,087	1,176	1,258	1,402	1,430	1,389
GGU 007030	Solar powered	1.3	864	887	906	958	925	986	1,042	1,140	1,159	1,131
GGU 006830	Solar powered	1.1	966	995	1,019	1,083	1,042	1,118	1,188	-	1,335	1,300
GGU 006630	Solar powered	1.0	1,051	1,086	1,113	1,188	1,140	1,229	1,311	1,455	1,483	1,442

White painted												
Product	Power	U <sub>w</sub>	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK08	SK06	UK04
GGL 207021U	Mains powered	1.3	729	748	763	804	778	827	872	951	966	943
GGL 206821U	Mains powered	1.1	811	834	853	905	872	933	989	1,087	1,106	1,078
GGL 206621U	Mains powered	1.0	879	907	929	989	951	1,022	1,087	1,202	1,224	1,191
GGL 207030	Solar powered	1.3	782	801	816	857	831	880	925	1,004	1,019	996
GGL 206830	Solar powered	1.1	864	887	906	958	925	986	1,042	-	1,159	1,131
GGL 206630	Solar powered	1.0	932	960	982	1,042	1,004	1,075	1,140	1,255	1,277	1,244

All prices in EUR (€)  
Find all sizes and prices on velux.ie

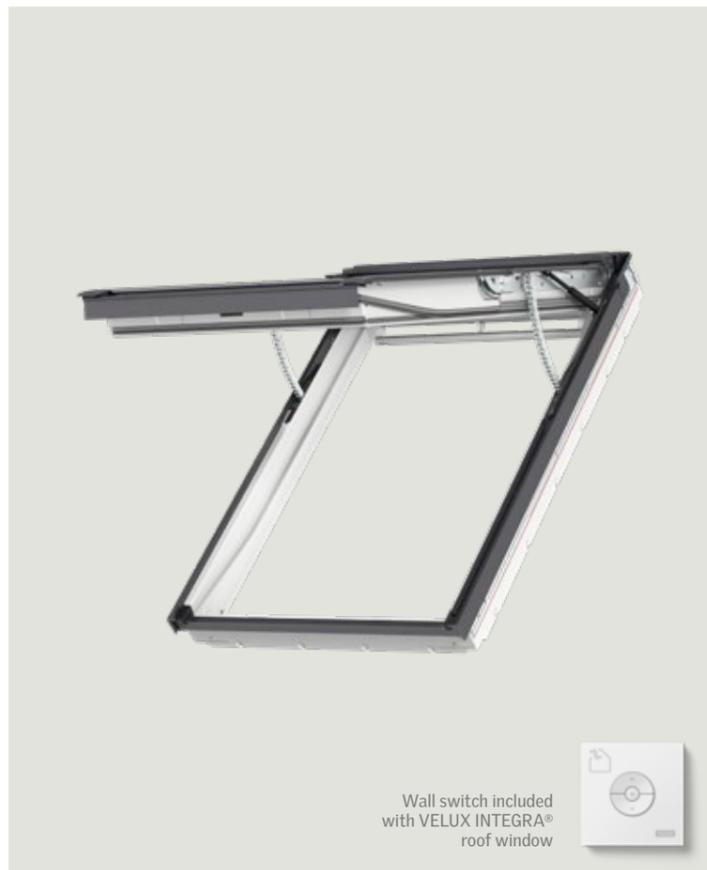

### Roof pitch



### Interior finish options



**White polyurethane**  
Maintenance-free and moisture resistant\*

\*Recommended for humid rooms like bathrooms and kitchens.

### Glazing options

	Double glazing --70	Triple glazing --66
Rain noise reduction	✓	✓
Safety lamination	✓	✓
Toughened glass	✓	✓
UV filter	✓	✓
Easy-to-clean		✓
Anti-dew		✓

Thermal transmittance of glazing ( $U_g$ -value) 1.0 0.6

Read more about glazing specifications on page 10.

### Compatibility

- VELUX electric roof window – top-hung is only compatible with manual or solar-powered blinds
- Not compatible with twin flashings, sloping and vertical combinations, and insulated replacement flashings
- ZWP Profile set available for use with EDN/EDJ recessed flashing kits

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

### Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

\*Read more on page 21.

# VELUX INTEGRA® top-hung

Mains powered, GPU

Welcome to the best of both worlds. The electric top-hung roof window provides panoramic views and effortless remote-controlled operation. Its available in mains powered operation allowing you to open and close it easily with one touch of a switch. Ideal for any loft conversion.

- Automatic rain sensor that closes the roof window when it rains
- Full 45° opening allows for stunning views
- Provides fresh air, better indoor comfort and home security
- Get VELUX App Control and operate more products from one unit\*



Roof windows

External frame sizes (w×h) cm	$U_w$ -value W/m <sup>2</sup> K	FK06 66×118	FK08 66×140	MK06 78×118	MK08 78×140	PK06 94×118	PK08 94×140	SK06 114×118	SK08 114×140
-------------------------------	------------------------------------	----------------	----------------	----------------	----------------	----------------	----------------	-----------------	-----------------



### White polyurethane

GPU 007021U	Mains powered	1.3	1,158	1,219	1,194	1,267	1,267	1,395	1,419	1,474
GPU 006621U	Mains powered	1.0	1,457	1,546	1,510	1,617	1,617	1,803	1,838	1,918

### Profile set\*


ZWP WK06 0000	43	-	43	-	43	-	43	-	46
ZWP WK08 0000	-	46	-	46	-	46	-	46	-

\* For installations (EDN, EDJ, flashing kits). Required for all recessed installations of VELUX INTEGRA® electric top-hung roof windows.

All prices in EUR (€)  
Find all sizes and prices on velux.ie



### Roof pitch



### Interior finish options



**White polyurethane**  
Maintenance-free and moisture resistant\*



**White painted**  
Bright white finish for modern interiors

\*Recommended for humid rooms like bathrooms and kitchens.

### Glazing options

	Double glazing --70	Triple glazing --68	Triple glazing --66	Triple glazing --62
Rain noise reduction	✓	✓	✓	✓
Safety lamination	✓	✓	✓	✓
Toughened glass	✓	✓	✓	✓
UV filter	✓	✓	✓	✓
Easy-to-clean			✓	
Anti-dew			✓	✓
Thermal transmittance of glazing (U <sub>g</sub> -value)	1.0	0.7	0.6	0.5

Read more about glazing specifications on page 10.

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

### Out-of-reach

- If your roof window is out-of-reach, VELUX recommends mains or solar powered roof window

Read more on page 28.

## Manual centre-pivot

The original roof window, GGL and GGU

The classic VELUX roof window is operated by a neatly designed and convenient top control bar that allows you to open and close the window even with furniture placed underneath it. It also features a ventilation flap so you can air out your room with the window closed.

- Convenient top opening with integrated ventilation
- Ventilation filter protects against dust and insects
- Easy to rotate the window and clean the outer glass
- Easily add blinds by simply clicking them into the patented mounting brackets



External frame sizes (w×h) cm	U <sub>w</sub> -value W/m <sup>2</sup> K	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK08	SK06	UK04
-------------------------------	---	------	------	------	------	------	------	------	------	------	------



#### White polyurethane

GGU 0070	1.3	408	431	450	502	469	530	586	684	703	675
GGU 0068	1.1	510	539	563	627	586	662	732	855	879	844
GGU 0066	1.0	595	630	657	732	684	773	855	999	1,027	986
GGU 0062	0.92	710	750	783	873	816	922	1,020	1,191	1,223	-
GGU 0070Q*	1.3	517	540	-	611	578	639	695	793	812	784

#### White painted


GGL 2070	1.3	326	345	360	401	375	424	469	548	563	540
GGL 2068	1.1	408	431	450	502	469	530	586	684	703	675
GGL 2066	1.0	476	504	526	586	548	619	684	799	821	788
GGL 2062	0.92	568	600	626	698	653	737	816	953	979	-
GGL 2070Q*	1.3	435	454	-	510	484	533	578	657	672	649

\* Special enhanced security window fitted with toughened laminated glass combined with a reinforced construction and extra locks.

All prices in EUR (€)  
Find all sizes and prices on velux.ie



## Roof pitch



Suitable for roof pitches between 15° and 55°. Also suitable for roof pitches between 55° and 75° with special springs. Please specify when ordering.

## Interior finish options



**White polyurethane**  
Maintenance-free and moisture resistant\*



**White painted**  
Bright white finish for modern interiors

\*Recommended for humid rooms like bathrooms and kitchens.

## Glazing options

	Double glazing --70	Triple glazing --68	Triple glazing --66	Triple glazing --62
Rain noise reduction	✓	✓	✓	✓
Safety lamination	✓	✓	✓	✓
Toughened glass	✓	✓	✓	✓
UV filter	✓	✓	✓	✓
Easy-to-clean			✓	
Anti-dew			✓	✓
Thermal transmittance of glazing (U <sub>g</sub> -value)	1.0	0.7	0.6	0.5

Read more about glazing specifications on page 10.

## Emergency escape

- Due to the unrestricted opening area, the majority of sizes are suitable for emergency escape purposes.

## Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

## Out-of-reach

- If your roof window is out-of-reach, VELUX recommends mains or solar powered roof window

Read more on page 30.

# Manual top-hung

Outward-opening roof window, GPL and GPU

Use the elegant handle at the bottom to open the window outwards, lean out and enjoy an undisturbed panoramic view of the outdoors with the VELUX top-hung roof window. The outward-opening roof window creates a balcony-like feeling when the window opens and is our recommended choice for any loft conversion. It also features a ventilation bar so you can air out your room with the window closed.

- Easy opening for an uninterrupted, panoramic view
- Ventilation filter protects against dust and insects
- Easy to rotate the window and clean the outer glass
- Easily add blinds by simply clicking them into the patented mounting brackets



External frame sizes (w×h) cm	U <sub>w</sub> -value	CK04	CK06▲	FK06▲	MK04▲	MK06▲	MK08▲	PK08▲	PK10▲	SK06▲	UK04▲
	W/m² K	55×98	55×118	66×118	78×98	78×118	78×140	94×140	94×160	114×118	134×98



### White polyurethane

GPU 0070	1.3	559	583	650	608	686	759	887	936	911	-
GPU 0068	1.1	699	729	813	759	858	949	1,109	1,169	1,139	-
GPU 0066	1.0	816	851	949	887	1,002	1,109	1,295	1,366	1,330	-
GPU 0062	0.96	972	1,015	1,131	1,057	1,194	1,321	1,543	1,628	1,586	-

### White painted

GPL 2070	1.3	476	497	554	518	585	647	756	797	776	745
GPL 2068	1.1	595	621	692	647	731	809	944	996	970	932
GPL 2066	1.0	695	725	808	756	854	944	1,103	1,164	1,133	1,088

▲ Sizes suitable for emergency escape requirements.

All prices in EUR (€)  
Find all sizes and prices on velux.ie



### Roof pitch



### Underfelt and underfelt collar



Always use underfelt and VELUX underfelt collar. VELUX underfelt collar is included in the flashing and part of the Low Pitch solution.

### Interior finish options



**White painted**  
Bright white finish for modern interiors

### Glazing options

	Triple glazing --15
Rain noise reduction	✓
Safety lamination	✓
Toughened glass	✓
UV filter	✓
Easy-to-clean	
Anti-dew	
Thermal transmittance of glazing (U <sub>g</sub> -value)	0.7

### Blinds and shutters

- Consider blinds for light dimming or blackout

Read more on page 103.

### Operation

- Can be upgraded to solar powered operation via VELUX INTEGRA® conversion kit (KSX)


Read more on page 134.

## Manual centre-pivot for low-pitch roofs

Low-pitch roof window GBL

Perfect for bringing daylight and fresh air into single-storey extensions, our brand new low-pitch roof window is the best solution for roofs with a pitch between 10°-20°. The product is designed to be totally watertight at a low pitch and features glass-to-edge technology which provides a seamless and aesthetic installation.

- Tested in northern Europe's largest wind tunnel for wind and water resistance
- Fast and simple installation
- Compatible with VELUX interior blinds and external anti-heat shutter
- Suitable for profiled tiles from 15mm up to 120mm which are approved for roof pitches from 10°-20°

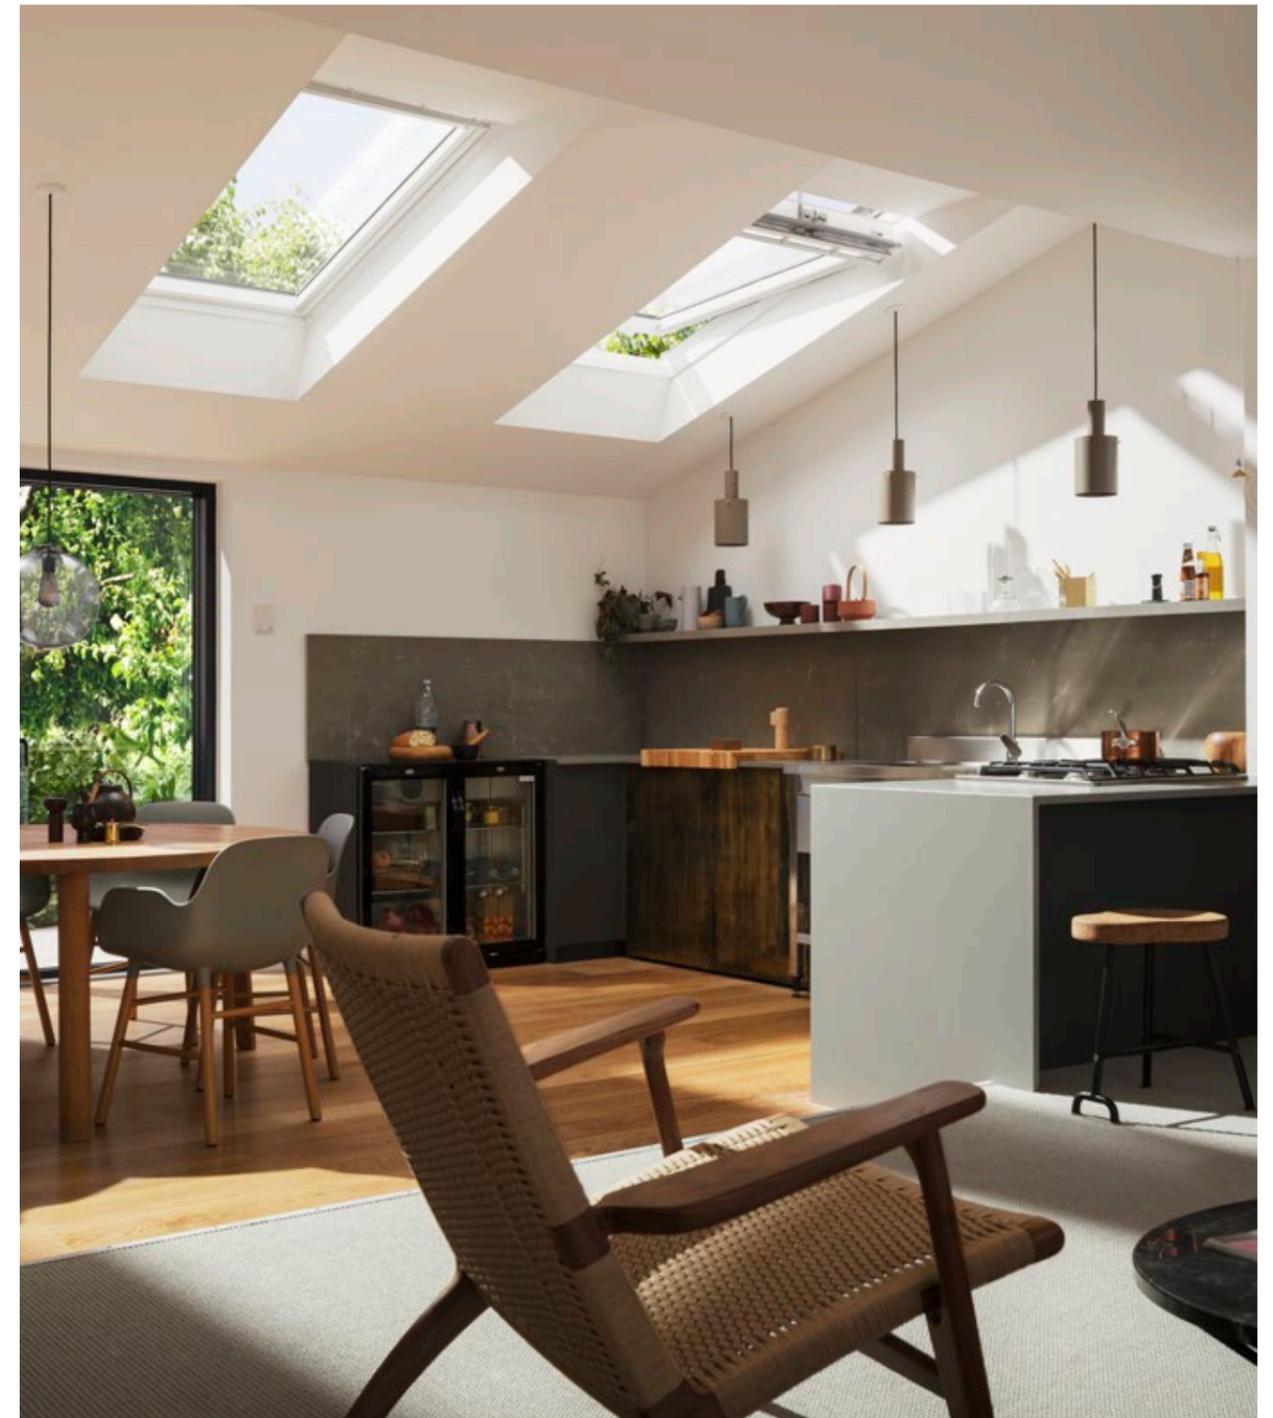

External frame sizes (w×h) cm	CK04	MK04	MK06	MK08	PK04	SK01	SK06
	55×98	78×98	78×118	78×140	94×98	114×70	114×118
<b>White painted</b>							
GBL S10G01*	548	601	668	734	679	771	866

\* Package includes window, flashing and underfelt collar suitable for installation into profiled tiles up to 120 mm.

All prices in EUR (€)  
Find all sizes and prices on velux.ie




## 3-in-1 Manual, centre-pivot

Three roof windows in one frame GGLS

With the VELUX 3-in-1 roof window, you can create a stunning focal point in any room. Its slim frame profile maximises the amount of daylight entering the room. What's more, the single frame makes installation of the three windows as simple as fitting just one VELUX roof window.

- Provides the feeling of more space
- One frame with multiple sashes for easy installation
- More cost-effective than purchasing three single roof windows of the same size
- Compatible with VELUX heat protection products and blinds

### Roof pitch



### Interior finish options



**White painted**  
Bright white finish for modern interiors

### Glazing options

	Double glazing --70	Triple glazing --66
Rain noise reduction	✓	✓
Safety lamination	✓	✓
Toughened glass	✓	✓
UV filter	✓	✓
Easy-to-clean		✓
Anti-dew		✓
Thermal transmittance of glazing (U <sub>g</sub> -value)	1.0	0.6

Read more about glazing specifications on page 10.

### Out-of-reach

- Consider the VELUX INTEGRA® solar 3-in-1 for remote-controlled operation of your window if placed out-of-reach

Read more on page 42.

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.



External frame sizes (w×h) cm	U <sub>w</sub> -value W/m <sup>2</sup> K	FFKF06 188×118	FFKF08 188×140
<b>White painted</b>			
GGLS 2066	3-in-1 Manual centre-pivot. Triple glazed.	1.0-1.1	1,785
GGLS 2070	3-in-1 Manual centre-pivot. Double glazed.	1.3-1.4	1,414
<b>Flashing</b>			
EDWS 2000	Suitable for profiled roofing material up to 120mm thick.	422	447
EDLS 2000	Suitable for slate up to 8mm thick.	422	447


All prices in EUR (€)  
Find all sizes and prices on velux.ie

## News

Available from autumn 2022



### Roof pitch



Suitable for roof pitches between 15° and 55°. Also suitable for roof pitches between 55° and 75° with special springs. Please specify when ordering.

### Interior finish options



**White painted**  
Bright white finish for modern interiors

### Glazing options

	Double glazing --70	Triple glazing --66
Rain noise reduction	✓	✓
Safety lamination	✓	✓
Toughened glass	✓	✓
UV filter	✓	✓
Easy-to-clean		✓
Anti-dew		✓
Thermal transmittance of glazing (U <sub>g</sub> -value)	1.0	0.6

Read more about glazing specifications on page 10.

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

## 3-in-1 Manual, top-hung

Three roof windows in one frame GPLS

Enjoy the best view with the panoramic top-hung VELUX 3-in-1. The elegant handle at the bottom of the window allows it to be opened up to 45° for an extra spacious balcony feeling.

- Opens the room for an uninterrupted view
- One frame with multiple sashes for easy installation
- More cost-effective than purchasing three single roof windows of the same size
- Compatible with VELUX heat protection products and blinds



Roof windows

External frame sizes (w×h) cm	U <sub>w</sub> -value W/m <sup>2</sup> K	FFKF06 188×118	FFKF08 188×140
<b>White painted</b>			
GPLS 2066	3-in-1 Top-hung, Triple glazed.	1.1-1.2	2,142
GPLS 2070	3-in-1 Top-hung, Double glazed.	1.4-1.5	1,619
<b>Flashing</b>			
EDWS 2000	Suitable for profiled roofing material up to 120mm thick.		422
EDLS 2000	Suitable for slate up to 8mm thick.		447

All prices in EUR (€)  
Find all sizes and prices on velux.ie

## News

Available from  
spring 2022



# 3-in-1 VELUX INTEGRA<sup>®</sup> centre-pivot

Solar powered, three windows in one frame GGLS

The solar powered VELUX 3-in-1 gives you full flexibility for ultimate control and convenience. Control each individual sash, blind, and heat protection product manually, remotely or with a VELUX intelligent home control system.

- Solar-powered and no wires needed for installation
- Convenient operation using wall switch
- Integrated rain sensor for automatic closing
- Provides the feeling of more space
- One frame with multiple sashes for easy installation
- Compatible with VELUX App Control and VELUX ACTIVE with NETATMO

## Roof pitch



## Interior finish options



**White painted**  
Bright white finish for  
modern interiors

## Glazing options

	Double glazing --70	Triple glazing --66
Rain noise reduction	✓	✓
Safety lamination	✓	✓
Toughened glass	✓	✓
UV filter	✓	✓
Easy-to-clean		✓
Anti-dew		✓
Thermal transmittance of glazing (U <sub>g</sub> -value)	1.0	0.6

Read more about glazing specifications on page 10.

## Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

## Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

Read more on page 21.




External frame sizes (w×h) cm	U <sub>w</sub> -value W/m <sup>2</sup> K	FFKF06 188×118	FFKF08 188×140
<b>White painted</b>			
GGLS 206630	3-in-1 Solar powered. Triple glazed.	1.0-1.1	2,697
GGLS 207030	3-in-1 Solar powered. Double glazed.	1.3-1.4	2,261
<b>Flashing</b>			
EDWS 2000	Suitable for profiled roofing material up to 120mm thick	422	447
EDLS 2000	Suitable for slate up to 8mm thick	422	447

All prices in EUR (€)  
Find all sizes and prices on velux.ie



### Roof pitch



### Interior finish options



**White painted**  
Bright white finish for modern interiors

### Glazing options

	Triple glazing --66
Rain noise reduction	✓
Safety lamination	✓
Toughened glass	✓
UV filter	✓
Easy to clean	✓
Anti-dew	✓

### Expand your view


- The single balcony can easily be combined with additional top-hung and fixed sloping roof windows for even more daylight.

## Roof balcony

VELUX CABRIO® GDL


Transform your home and welcome in the outdoors by simply opening your VELUX CABRIO® roof balcony. The innovative balcony opens in seconds to give your home more space, daylight and fresh air. Consisting of a top-hung roof window and a bottom section that unfolds into a glazed balcony with elegant side banister railings, it's a balcony experience like no other.

- Top element opens 45° giving you extra headroom and beautiful panoramic views
- Transforms from a roof window into a balcony in seconds
- Side banister railings for extra safety
- Energy-efficient triple glazing is featured as standard

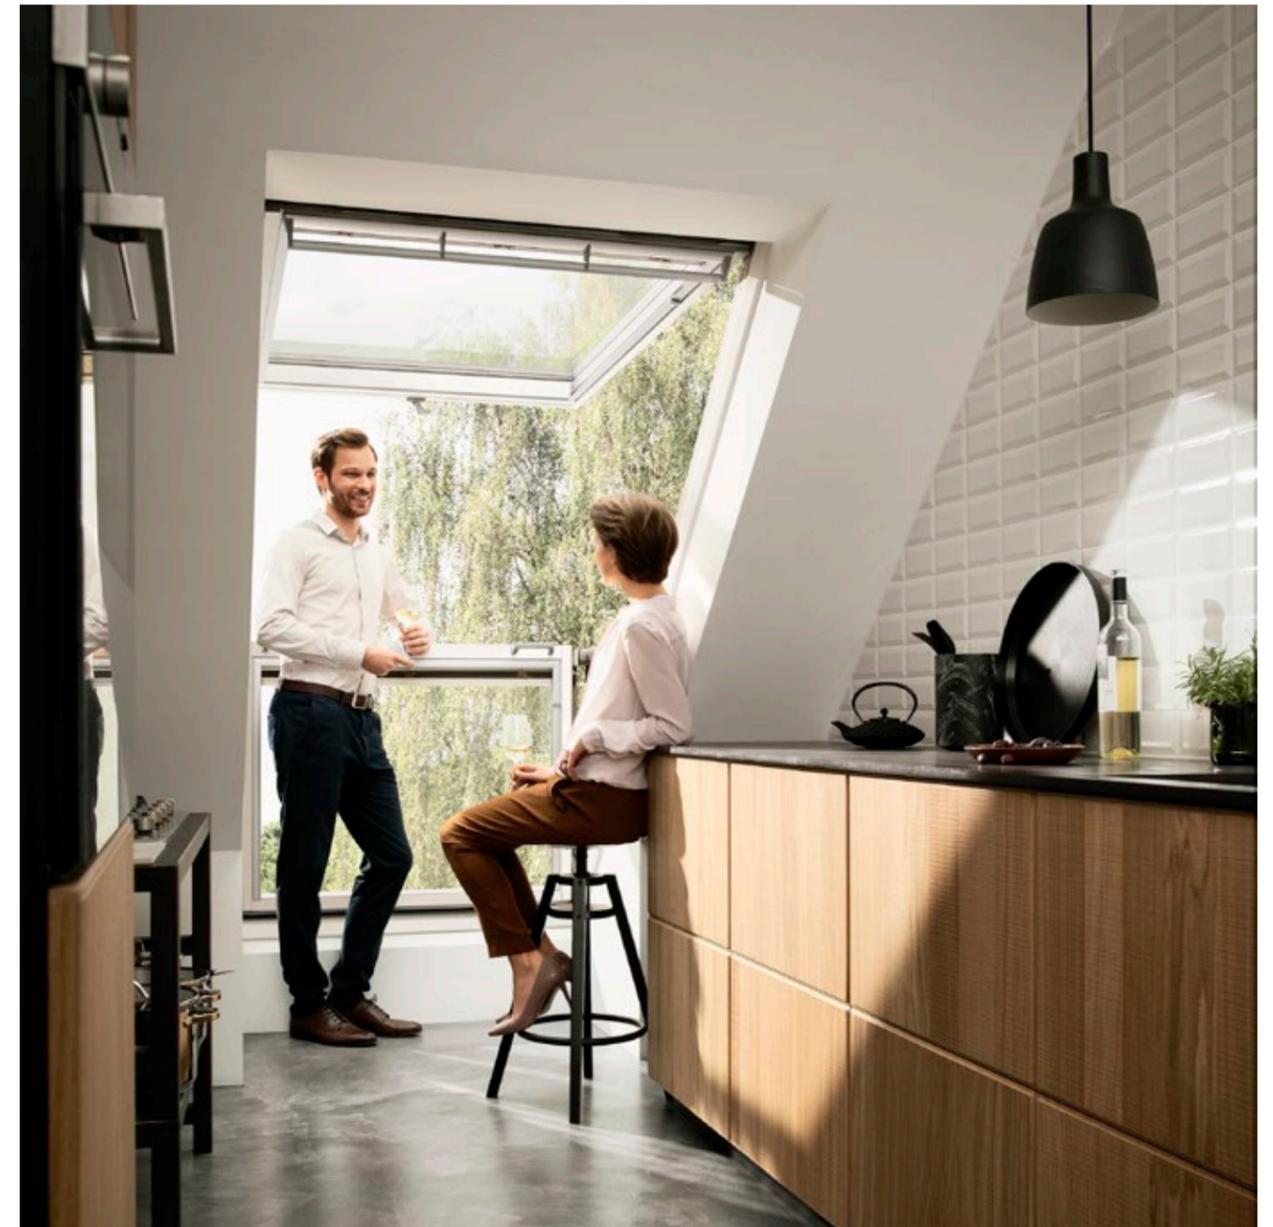

Roof windows

External frame sizes (w×h) cm	U <sub>w</sub> -value	MK19	MK19	PK19	PK19	SK19	SK19
	W/m <sup>2</sup> K	78×252	166×252	94×252	198×252	114×252	238×252




### White painted

GDL SD0L001	Including flashings for slate up to 8mm thick.	1.2	2,742	-	2,948	-	3,147	-
GDL SD0W001	Including flashings for profiled roofing material up to 120mm in profile.	1.2	2,742	-	2,948	-	3,147	-
GDL SK0L222	Including 1 x GPL & 1 x GIL and flashings for slate up to 8mm thick.	1.2	-	5,236	-	5,632	-	6,145
GDL SK0W224	Including 1 x GPL & 1 x GIL and flashings for profiled roofing material up to 120mm in profile.	1.2	-	5,236	-	5,632	-	6,145

All prices in EUR (€)  
Find all sizes and prices on velux.ie



### Roof pitch



### Glazing options

	--00	--59
Rain noise reduction		
Safety lamination		
Toughened glass		✓
UV filter		
Easy to clean		
Anti-dew		

## Cold room

Cold room windows GVK, GVT

The VELUX cold room roof window is designed for use in uninhabited rooms where easy access to the roof and regular ventilation is needed. Side-hung, it opens to the left or right depending on your preference. The window is made from maintenance-free aluminium and polyurethane and comes with integrated flashing.

- Three ventilation positions for constant low-level air flow
- Patented opening restrictor securely holds the window open at 90°
- Safe roof access using the moulded tread with grooves (GVT)
- Extruded aluminium sash for a maintenance-free window

External frame sizes (w×h) cm	103	
	46×61	54×83


### Black polyurethane

GVK 0000Z	180	-
GVT 0059Z	-	245

All prices in EUR (€)  
Find all sizes and prices on velux.ie



### Roof pitch



For geometric smoke ventilation, system is certified to EN ISO12101-2 for roof pitches between 15-90°. For aerodynamic smoke ventilation, system is certified to EN ISO12101-2 for roof pitches between 15-60°.

### Interior finish options



**White polyurethane**  
Maintenance-free and moisture resistant

### Glazing options

	Double glazing --70	Triple glazing --66
Rain noise reduction	✓	✓
Safety lamination	✓	✓
Toughened glass	✓	✓
UV filter	✓	✓
Easy-to-clean		✓
Anti-dew		✓

Thermal transmittance of glazing (U<sub>g</sub>-value) 1.0 0.6

Read more about glazing specifications on page 10.

## Smoke ventilation sloped roof window

Electric smoke ventilation roof windows GGL and GGU

A VELUX smoke ventilation window is designed to automatically open when smoke is detected to quickly release smoke and excess heat. It can also be opened to let in fresh air for improved indoor comfort. The VELUX smoke ventilation window is extensively tested and compliant with all EU requirements.

- Available for 1m<sup>2</sup> (SK06 size) or 1.5m<sup>2</sup> (UK08 size) of smoke free ventilation area
- Opens to full fire position in just 60 seconds when smoke ventilation is activated
- Same exterior design as other VELUX sloped roof windows
- Tested according to DIN EN 12101-2
- Compatible with wind deflector KFD to optimise the aerodynamic ventilation areas

External frame sizes (w×h) cm

U<sub>w</sub>-value W/m<sup>2</sup> K SK06 114×118 UK08 134×140



### White polyurethane

GGU SD0L140	GGU 0070 electric window + flashings for slate up to 8mm thick. Supplied with 1 smoke sensor, 1 break glass point and 1 wall control unit (KFX 210).	1.3	2,171	2,304
GGU SD0W140	GGU 0070 electric window + flashings for tiles up to 120mm in profile. Supplied with 1 smoke sensor, 1 break glass point and 1 wall control unit (KFX 210).	1.0	2,171	2,304

### Accessories


KFA 100	Smoke sensor	-	96
KFK 100	Break glass unit	-	96

All prices in EUR (€)  
Find all sizes and prices on velux.ie




## Roof pitch

Centre-pivot



Top-hung\*



\*The window is suitable for roof pitches between 15°-55°, also suitable for roof pitches between 55° and 75° with special springs. Please specify when ordering.

## Interior finish options



**White painted**  
Bright white finish for modern interiors

## Glazing options

	Double glazing --70
Rain noise reduction	✓
Safety lamination	✓
Toughened glass	✓
UV filter	✓
Easy to clean	
Anti-dew	
Thermal transmittance of glazing ( $U_g$ -value)	1.0

# Conservation

Conservation roof windows with glazing bar

Conservation roof windows are the perfect choice when planning dictates that a window of traditional external appearance is required. Its black exterior profiles and glazing bar blend seamlessly into the roof and match the original look of the building. It has the same technical features as a standard VELUX roof window.

- Available in both centre-pivot and top-hung
- RAL colour 9005

External frame sizes (w×h) cm	$U_w$ -value W/m <sup>2</sup> K	CK04	CK06	FK06	MK06	MK08	UK04
		55×98	55×118	66×118	78×118	78×140	134×98

### Centre-pivot white painted

Model	Description	$U_w$	CK04	CK06	FK06	MK06	MK08	UK04
GGL SD5N2	GGL 2570 roof window + EDN recessed flashing for slate up to 8mm thick (min 20°)	1.3	639	663	732	772	832	967
GGL SD5P2	GGL 2570 roof window + EDP flashing for plain tiles up to 14mm thick (min 25°)	1.3	568	589	654	691	746	869
GGL SD5W2	GGL 2570 roof window + EDW flashing for tiles up to 120mm in profile (min 15°)	1.3	568	589	654	691	746	869
GGL SD5J2	GGL 2570 roof window + EDJ recessed flashing for tiles up to 90mm in profile (min 20°)	1.3	639	663	732	772	832	967

### Top-hung white painted

Model	Description	$U_w$	CK04	CK06	FK06	MK06	MK08	UK04
GPL SD5N2	GPL 2570 roof window + EDN recessed flashing for slate up to 8mm thick (min 20°)	1.3	-	-	-	-	1,010	-
GPL SD5P2	GPL 2570 roof window + EDP flashing for plain tiles up to 14mm thick (min 25°)	1.3	-	-	-	-	924	-
GPL SD5W2	GPL 2570 roof window + EDW flashing for tiles up to 120mm in profile (min 15°)	1.3	-	-	-	-	924	-
GPL SD5J2	GPL 2570 roof window + EDJ recessed flashing for tiles up to 90mm in profile (min 20°)	1.3	-	-	-	-	1,010	-

All prices in EUR (€)  
Find all sizes and prices on [velux.ie](http://velux.ie)

# Combi solutions

Side-by-side combination

Page 50

Triple combination

Page 51

Quattro combination

Page 53

Duo combination

Page 54

Sloping and fixed


Page 57

Sloping and vertical

Page 58



### Roof pitch



### Fully customisable

- Available in centre-pivot and top-hung variants
- Choose from a wide range of sizes
- Available in white polyurethane and white painted finishes

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

### Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

Read more on page 21.

### Flashing

- Prices and sizes shown below are for flashings for installing roof windows into profiled roofing material up to 120 mm
- Flashings for other roof types are available

Read more on page 95.

## Side-by-side combination

Double the view

Where there is room for one roof window, there is often room for two. The VELUX side-by-side combination features two adjacent roof windows that give your room an enhanced feeling of spaciousness, double the amount of daylight, and widescreen views to the world outside.

- Expansive views with more daylight
- Increases feeling of spaciousness

#### Popular combination

External frame sizes (w×h) cm	UNITS	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
		66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140

#### Roof window example

GGL 2070	2	401	375	424	469	469	548	578	563	596	540	656
----------	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

#### Flashing for 100 mm frame distance

EKW 4021E* for profiled roofing material up to 120 mm	1	469	469	490	520	543	568	587	564	597	591	637
---	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----


#### Total price example

Roof windows and flashing	3	1,271	1,219	1,338	1,458	1,481	1,664	1,743	1,690	1,789	1,671	1,949
---------------------------	---	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

All prices in EUR (€)  
Find all flashing types, sizes and prices on velux.ie



### Roof pitch



### Fully customisable

- Available in centre-pivot and top-hung variants
- Choose from a wide range of sizes
- Available in white polyurethane and white painted finishes

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

### Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

Read more on page 21.

### Flashing

- Prices and sizes shown below are for flashings for installing roof windows into profiled roofing material up to 120 mm
- Flashings for other roof types are available

Read more on page 95.

## Triple combination

A panoramic centrepiece

A VELUX Triple combi solution creates an impressive centrepiece in your room. With three roof windows side by side, you can dramatically increase the amount of daylight and create a stunning architectural feature that opens up the room with a panoramic view.

- Panoramic views and significantly more daylight
- Increases the feeling of spaciousness

#### Popular combination

External frame sizes (w×h) cm	UNITS	FK06	MK04	MK06	MK08	PK08	PK10	SK06	UK04	UK08
		66×118	78×98	78×118	78×140	94×140	94×160	114×118	134×98	134×140

#### Roof window example

GGL 2070	3	401	375	424	469	548	578	563	540	656
----------	---	-----	-----	-----	-----	-----	-----	-----	-----	-----

#### Flashing for 100 mm frame distance

EKW S0312 For profiled roofing material up to 120 mm	1	294	294	308	328	366	378	363	387	417
--	---	-----	-----	-----	-----	-----	-----	-----	-----	-----

#### Installation products

BDX 2000 (including BFX)	3	44	44	46	48	50	52	50	50	54
--------------------------	---	----	----	----	----	----	----	----	----	----


#### Total price example

Roof windows, flashings and installation products	7	1,629	1,551	1,718	1,879	2,160	2,268	2,202	2,157	2,547
---	---	-------	-------	-------	-------	-------	-------	-------	-------	-------

All prices in EUR (€)  
Find all flashing types, sizes and prices on velux.ie



### Roof pitch



### Fully customisable

- Available in centre-pivot and top-hung variants
- Choose from a wide range of sizes
- Available in white polyurethane and white painted finishes

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

### Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

Read more on page 21.

### Flashing

- Prices and sizes shown below are for flashings for installing roof windows into profiled roofing material up to 120 mm
- Flashings for other roof types are available

Read more on page 96.

## Quattro combination

Double-height expansive view

The VELUX Quattro combination takes the side-by-side combination and doubles it for even more daylight and fantastic floor-to-ceiling views. This four-window solution creates a dramatic centrepiece, increasing the amount of daylight and the feeling of spaciousness in your room.

- Floor to ceiling views and more daylight
- Increases the feeling of spaciousness

### Popular combination

External frame sizes (w×h) cm	UNITS	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
		66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140
												

### Roof window example

GGL 2070	4	401	375	424	469	469	548	578	563	596	540	656
----------	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

### Flashing for 100 mm frame distance

EKW S0222 For profiled roofing material up to 120 mm	1	450	450	471	503	535	562	580	558	594	594	638
--	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

### Installation products

BDX 2000 (including BFX)	4	44	44	46	48	48	50	52	50	52	50	54
--------------------------	---	----	----	----	----	----	----	----	----	----	----	----


### Total price example

Roof windows, flashings and installation products	9	2,230	2,126	2,351	2,571	2,603	2,954	3,100	3,010	3,186	2,954	3,478
---	---	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

All prices in EUR (€)  
Find all flashing types, sizes and prices on velux.ie



### Roof pitch



### Fully customisable

- Available in centre-pivot and top-hung variants
- Choose from a wide range of sizes
- Available in white polyurethane and white painted finishes

### Blinds and shutters

- Consider interior blinds for light control, and awning blinds or shutters for heat protection and blackout

Read more on page 103.

### Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

Read more on page 21.

### Flashing

- Prices and sizes shown below are for flashings for installing roof windows into profiled roofing material up to 120 mm
- Flashings for other roof types are available

Read more on page 96.

## Duo combination

Ideal for narrow rooms

For narrow rooms, such as above stairs, a duo combination of two VELUX roof windows draws more daylight deep into the room. By adding an additional roof window, you can enhance the feeling of spaciousness, maximise natural light

and create an architectural feature in otherwise often dark and overlooked spaces.

- Enhanced views and more daylight
- Increases the feeling of spaciousness

#### Popular combinations

External frame sizes (w×h) cm	UNITS	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
		66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140
												

#### Roof window example

GGL 2070	2	401	375	424	469	469	548	578	563	596	540	656
----------	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

#### Flashing

EKW S0122 For profiled roofing material up to 120 mm	1	212	212	222	237	252	265	274	263	280	280	301
--	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

#### Installation products


BDX 2000 (including BFX)	2	44	44	46	48	48	50	52	50	52	50	54
--------------------------	---	----	----	----	----	----	----	----	----	----	----	----

#### Total price example

Roof windows, flashings and installation products	5	1,102	1,050	1,162	1,271	1,286	1,461	1,534	1,489	1,576	1,460	1,721
---	---	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

\* Includes installation products (BDX 2000)


All prices in EUR (€)  
Find all flashing types, sizes and prices on velux.ie

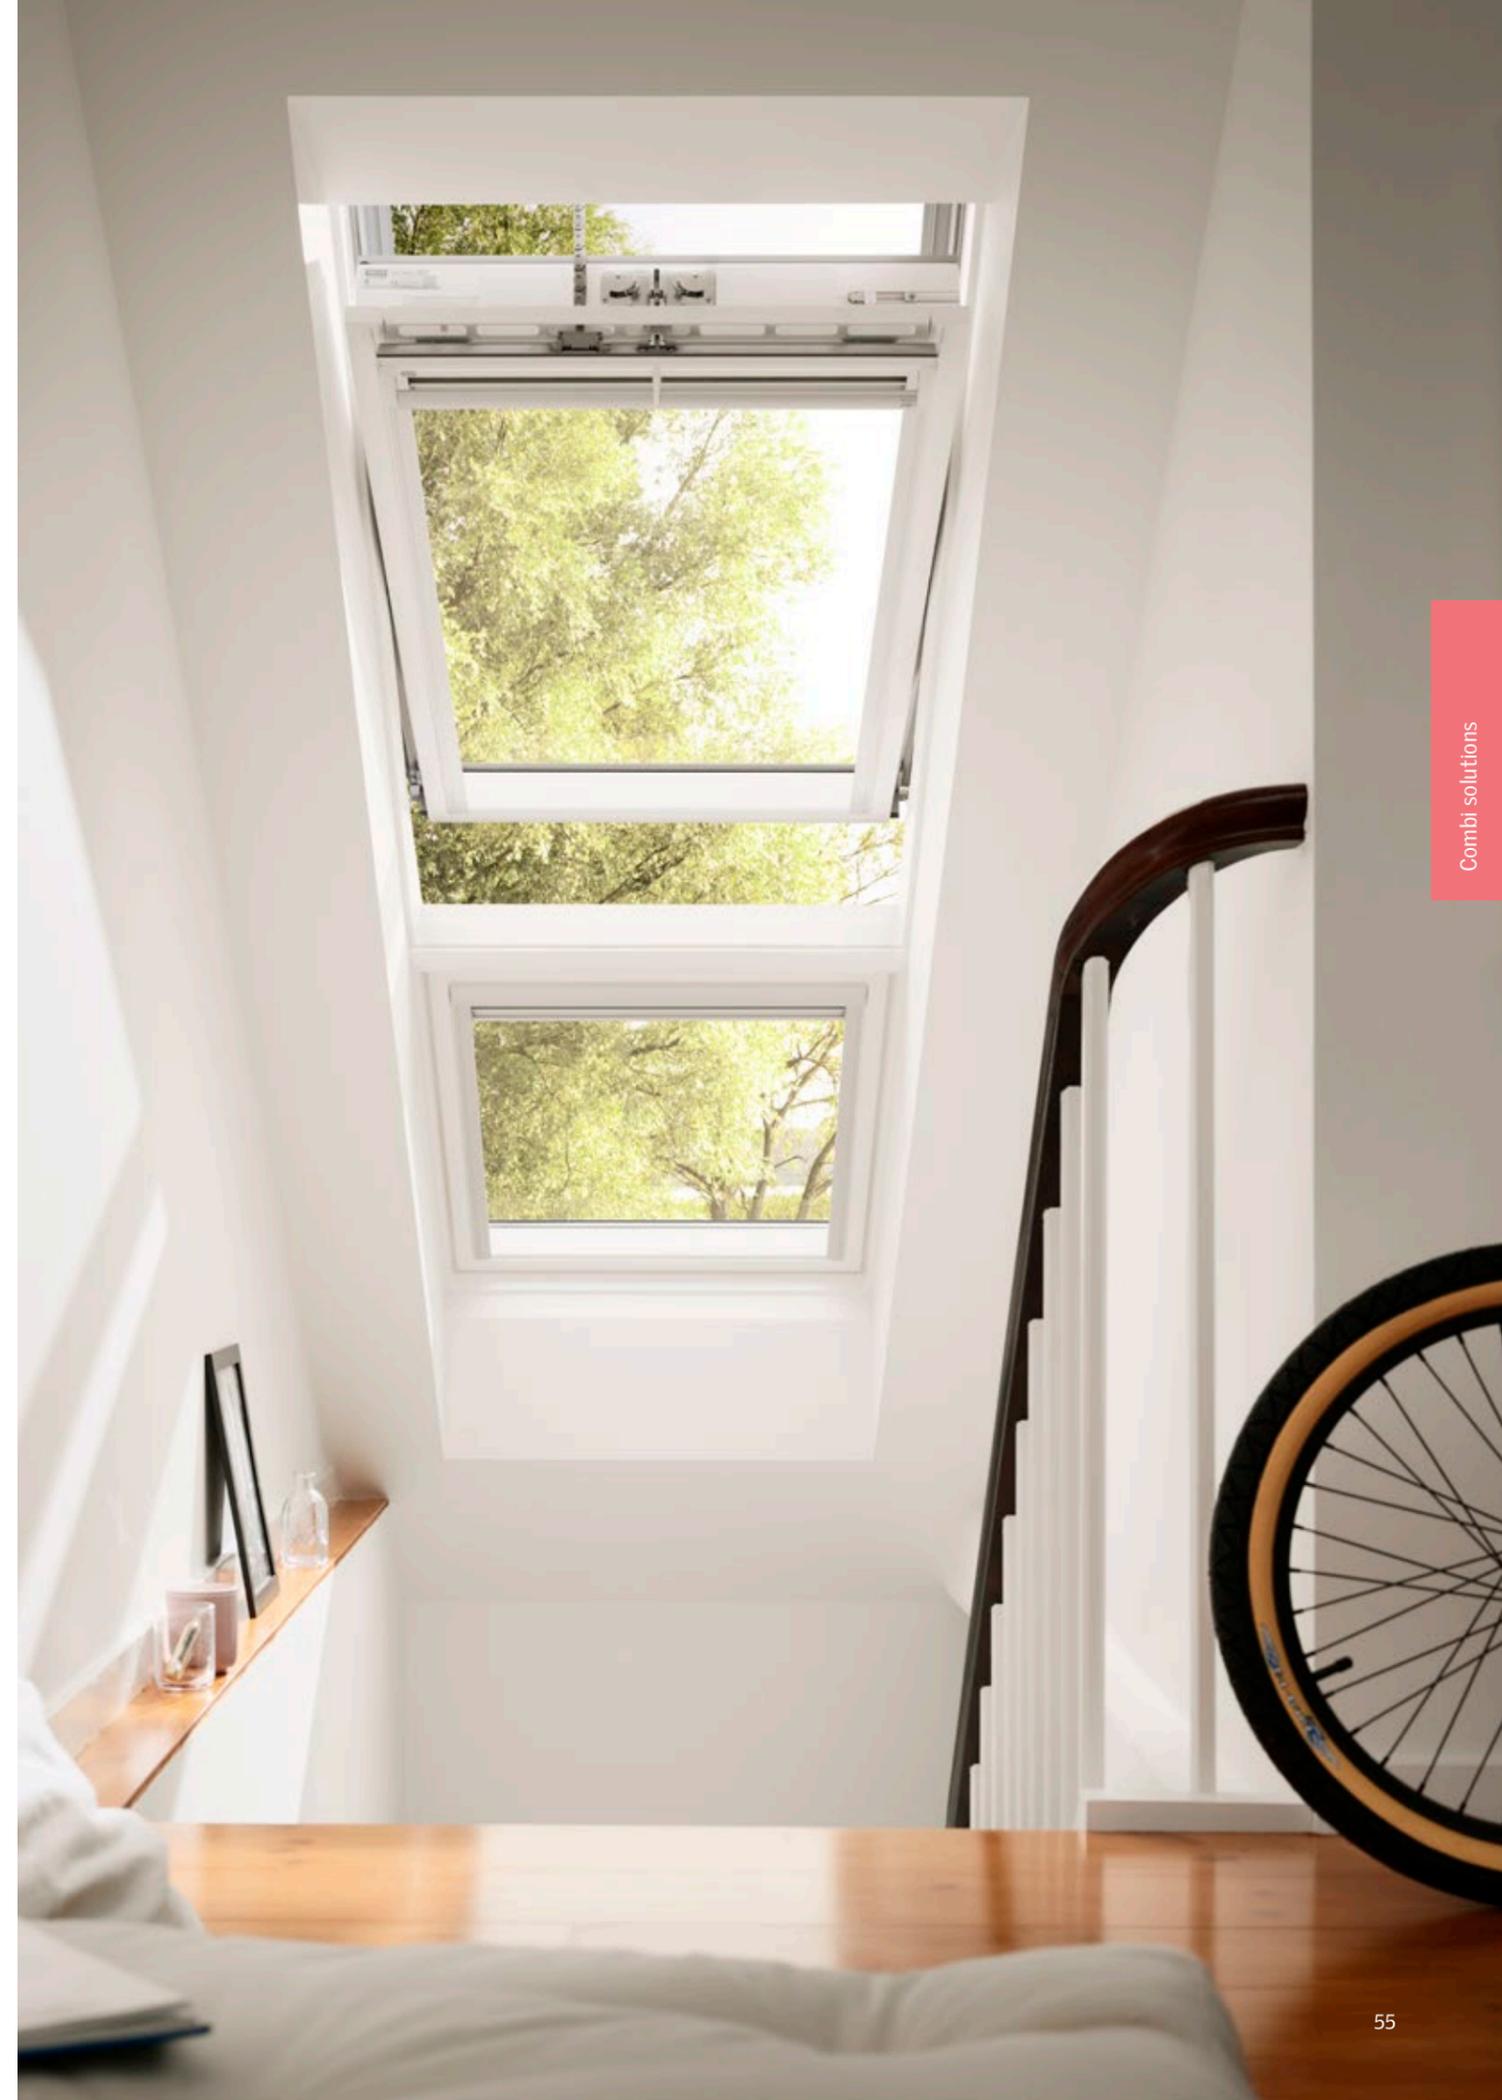


# Expand your view

Featured products:  
GIL PK34 2070 with a GGL PK10 2070

Total price of this combination: €1,195

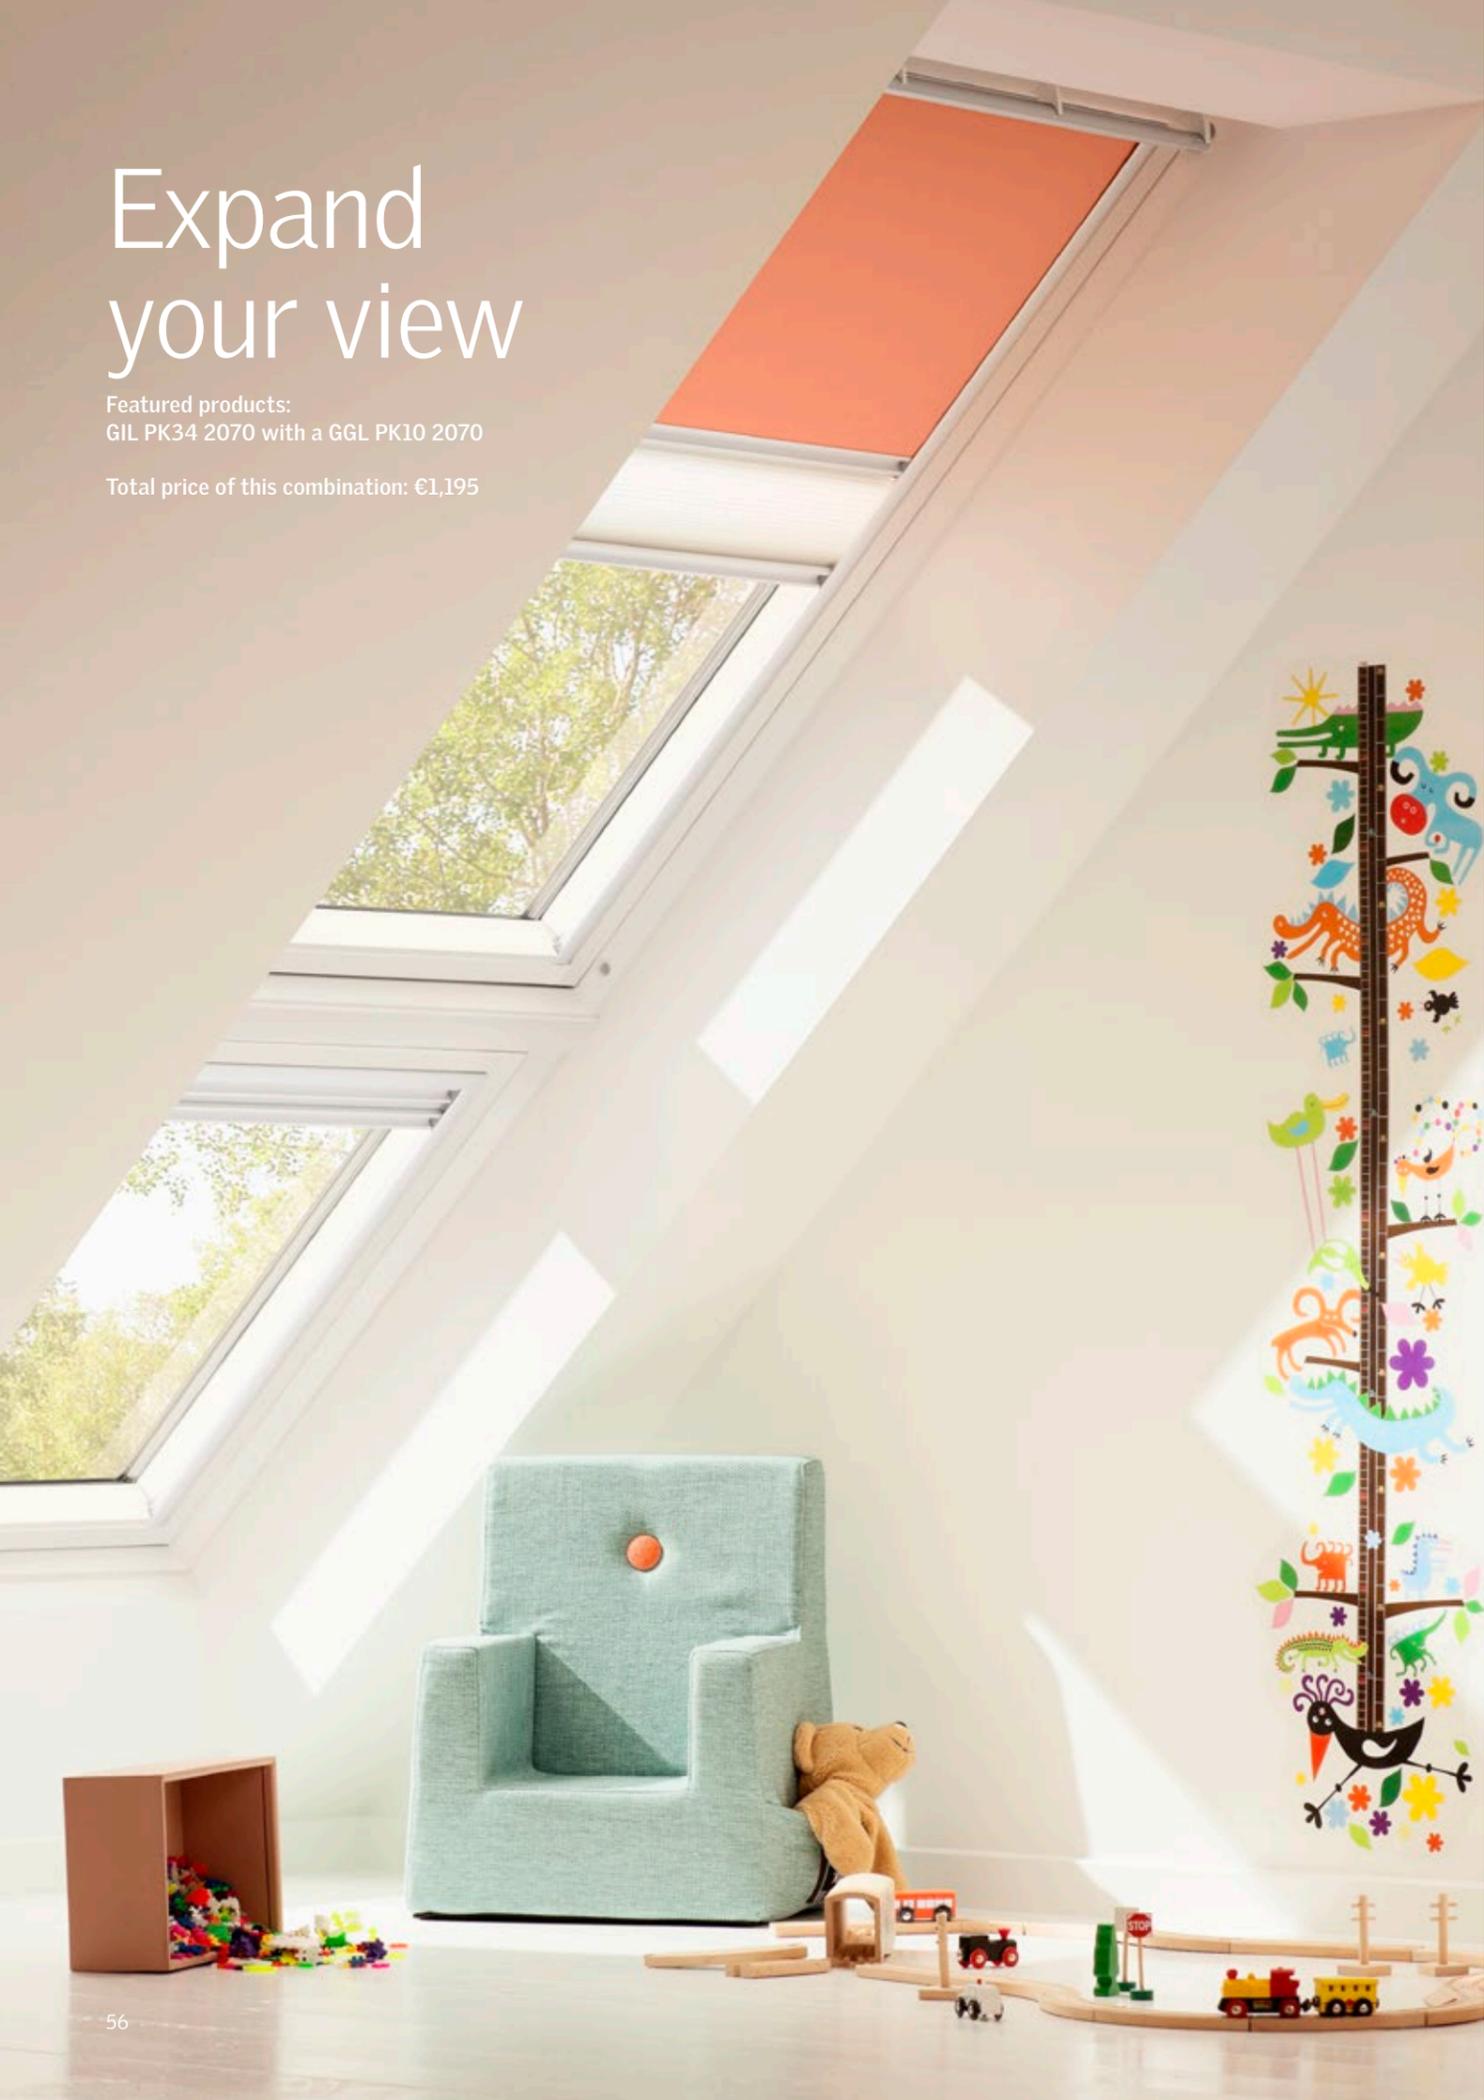

## Roof pitch



## Flashings

- Read more about sizes and prices for sloping extension flashings on page 97

## Glazing options

	Double glazing --70	Triple glazing --68	Triple glazing --66
Rain noise reduction	✓	✓	✓
Safety lamination	✓	✓	✓
Toughened glass	✓	✓	✓
UV filter	✓	✓	✓
Easy-to-clean			✓
Anti-dew			✓

Thermal transmittance of glazing (U <sub>g</sub> -value)	1.0	0.7	0.6

Read more about glazing specifications on page 10.

## Sloping and fixed

A sleek solution to increase your view

Extend your views with a fixed window element that blends seamlessly with the roof window. The window element fills the sloping space between the floor and the bottom of the roof window to provide more expansive views and more daylight. This is the ideal choice if you want to maximise your window area. Add the

right size opening window to create the perfect combination. See page 142 for available sizes.

- Slim connection
- Daylight extension
- Suitable for all rooms

External frame sizes (w×h) cm	U <sub>w</sub> -value W/m <sup>2</sup> K	MK34 78×95	PK34 94×95	SK34 114×95	UK34 134×95

### White polyurethane

GIU 0070	1.3	593	684	787	821
GIU 0068	1.1	741	855	983	1,026
GIU 0066	1.0	865	999	1,148	1,198


### White painted

GIL 2070	1.3	534	617	709	740
GIL 2068	1.1	668	771	886	925
GIL 2066	1.0	780	900	1,035	1,080

All prices in EUR (€)  
Find all types, sizes and prices on [velux.ie](http://velux.ie)



### Roof pitch



### Flashings

- Read more about sizes and prices for sloping extension flashings on page 97

### Glazing options

	Double glazing --70	Triple glazing --68	Triple glazing --66
Rain noise reduction	✓	✓	✓
Safety lamination	✓	✓	✓
Toughened glass	✓	✓	✓
UV filter	✓	✓	✓
Easy-to-clean			✓
Anti-dew			✓
Thermal transmittance of glazing ( $U_g$ -value)	1.0	0.7	0.6


Read more about glazing specifications on page 10.

### Details


Fixed element VIU




Bottom-hung opening inwards VFE



Tilt and turn inwards to the left VFA



Tilt and turn inwards to the right VFB



## Sloping and vertical

More daylight and a better view, VIU, VFE, VFA & VFB

Extend your views with a fixed or openable vertical window element. The additional element fills the vertical space between the floor and the bottom of the roof window to provide more expansive views and more daylight.

- Perfect for one-and-a-half storey homes
- Fixed or opening window elements

External frame sizes (wxh) cm	$U_w$ -value W/m <sup>2</sup> K	MK35 78x95	PK35 94x95	SK35 114x95	UK35 134x95

#### White polyurethane

VIU 0070 Fixed	1.3	601	705	809	849
VIU 0068 Fixed	1.1	751	881	1,011	1,061
VIU 0066 Fixed	1.0	877	1,029	1,180	1,239

#### White painted

VFE 2070 Bottom-hung opening inwards	1.3	601	705	809	849
VFE 2068 Bottom-hung opening inwards	1.1	751	881	1,011	1,061
VFE 2066 Bottom-hung opening inwards	1.0	877	1,029	1,180	1,239
VFA/VFB 2070 Tilt and turn inwards to the left/right	1.3	659	773	887	-
VFA/VFB 2068 Tilt and turn inwards to the left/right	1.1	824	966	1,109	-
VFA/VFB 2066 Tilt and turn inwards to the left/right	1.0	962	1,129	1,295	-

All prices in EUR (€)  
Find all sizes and prices on velux.ie



# Expand your view

Featured products:  
GGL MK08 2070 and VFE MK35 2070

Total price of this combination: €1,070



# Flat roof windows

---

**Curved glass – New generation**

Page 64

---

**Flat glass – New generation**

Page 66

---

**Dome with glazing**

Page 68

---

**Dome**

Page 70

---

**Special function flat roof windows**

Page 72

---

**Vario by VELUX  
Bespoke rooflights**

Page 74

---

**Modular skylights**

Page 76

# The full range of flat roof windows

We offer a complete range of flat roof windows that covers all needs. From innovative curved and flat glass rooflights to traditional domes, the VELUX flat roof window portfolio is broad and has something for everyone.

<p><b>New generation</b></p>  <p><b>Curved glass rooflight</b></p> <p>Top performer with CurveTech</p> <ul style="list-style-type: none"> <li>• Maximum daylight area</li> <li>• Excellent energy performance</li> <li>• State-of-the-art design</li> <li>• Excellent sound reduction</li> <li>• Clear view and drainage with CurveTech</li> </ul> <p><b>News</b> Solar variant! Bigger sizes!</p> <p>(Price example 100 x 100 cm) <b>€1,332</b></p> <p>See more page 64 →</p>	<p><b>New generation</b></p>  <p><b>Flat glass rooflight</b></p> <p>Daylight, design &amp; aesthetics</p> <ul style="list-style-type: none"> <li>• Maximum daylight area</li> <li>• Excellent energy performance</li> <li>• State-of-the-art design</li> <li>• Excellent sound reduction</li> </ul> <p>(Price example 100 x 100 cm) <b>€1,113</b></p> <p>See more page 66 →</p>	 <p><b>Dome with glazing</b></p> <p>Advanced dome solution</p> <ul style="list-style-type: none"> <li>• Good daylight area</li> <li>• Good energy performance</li> <li>• Classic design</li> <li>• Good sound reduction</li> </ul> <p>(Price example 100 x 100 cm) <b>€834</b></p> <p>See more page 68 →</p>	 <p><b>Dome</b></p> <p>Without glazing. For uninhabited rooms and buildings</p> <ul style="list-style-type: none"> <li>• Basic daylight area</li> <li>• Basic energy performance</li> </ul> <p>(Price example 100 x 100 cm) <b>€589</b></p> <p>See more page 70 →</p>
--	--	---	---

## Bespoke solution

- If you are looking for a bespoke solution, check out Vario by VELUX on page 74.



Specifications for flat roof windows	New generation	New generation		
	Curved glass rooflight	Flat glass rooflight	Dome with glazing	Dome
Application areas	• Habitable rooms	• Habitable rooms	• Habitable rooms	• Uninhabited rooms and buildings, such as warehouses, garages, sheds, or industrial buildings.
Roof pitch	• 0-15°	• 2-15°	• 0-15°	• 0-15°
Design	<ul style="list-style-type: none"> <li>• Curved glass top</li> <li>• 88% daylight area*</li> <li>• Glass-to-edge inside view</li> <li>• Glass-to-edge curved top</li> <li>• Integrated motor in frame</li> <li>• Discreetly placed blinds</li> <li>• Better view – rain off CurveTech</li> </ul>	<ul style="list-style-type: none"> <li>• Flat glass top</li> <li>• 88% daylight area*</li> <li>• Glass-to-edge inside view</li> <li>• Glass-to-edge flat top</li> <li>• Integrated motor in frame</li> <li>• Discreetly placed blinds</li> </ul>	<ul style="list-style-type: none"> <li>• Clear or opaque dome skin</li> <li>• 70% daylight area*</li> <li>• Integrated motor in frame</li> </ul>	<ul style="list-style-type: none"> <li>• 2 or 3-layer opaque dome skins</li> <li>• 64% daylight area*</li> </ul>
Performance	<ul style="list-style-type: none"> <li>• Glass top and base unit with double or triple glazing</li> <li>• Insulating glass unit with inner laminated glass (P4A)</li> <li>• Urc,ref300: 0,65 W/(m²K)**</li> <li>• Arc,ref300: 4,4 m²**</li> <li>• Sound insulation 39 db**</li> <li>• Burglary resistant as standard***</li> </ul>	<ul style="list-style-type: none"> <li>• Glass top and base unit with double or triple glazing</li> <li>• Insulating glass unit with inner laminated glass (P4A)</li> <li>• Urc,ref300: 0,75 W/(m²K)**</li> <li>• Arc,ref300: 4,1 m²**</li> <li>• Sound insulation 39 db**</li> <li>• Burglary resistant as standard***</li> </ul>	<ul style="list-style-type: none"> <li>• Dome skin and base unit with double glazing</li> <li>• Insulating glass unit with inner laminated glass (P4A)</li> <li>• U-value: 0,80 W/(m²K)**</li> <li>• Area: 3,4 m²**</li> <li>• Sound insulation 36 db**</li> <li>• Burglary resistant variant available***</li> </ul>	<ul style="list-style-type: none"> <li>• 2 or 3-layer opaque dome skins (no glazing)</li> <li>• U-value: 2,2W/(m²K)**</li> <li>• Area: 2,6 m²**</li> <li>• Sound insulation 20 db**</li> </ul>
Operation	<ul style="list-style-type: none"> <li>• Fixed variant</li> <li>• Electric variant</li> <li>• Solar powered variant</li> </ul>	<ul style="list-style-type: none"> <li>• Fixed variant</li> <li>• Electric variant</li> <li>• Solar powered variant</li> </ul>	<ul style="list-style-type: none"> <li>• Fixed variant</li> <li>• Electric variant</li> </ul>	<ul style="list-style-type: none"> <li>• Fixed variant</li> <li>• Electric variant</li> </ul>
Smart home and sensors	<ul style="list-style-type: none"> <li>• VELUX ACTIVE compatible</li> <li>• Pre-installed rain sensor as standard</li> <li>• Pre-paired wall switch</li> </ul>	<ul style="list-style-type: none"> <li>• VELUX ACTIVE compatible</li> <li>• Pre-installed rain sensor as standard</li> <li>• Pre-paired wall switch</li> </ul>	<ul style="list-style-type: none"> <li>• VELUX ACTIVE compatible</li> <li>• Pre-installed rain sensor as standard</li> <li>• Pre-paired wall switch</li> </ul>	
Heat protection and daylight adjustment	<ul style="list-style-type: none"> <li>• Anti-heat blind (solar) – Optimised and discreet placement</li> <li>• Blackout blind (solar) – Optimised and discreet placement</li> <li>• Insect screen (manual, cleanable, removable)</li> </ul>	<ul style="list-style-type: none"> <li>• Anti-heat blind (solar) – Optimised and discreet placement</li> <li>• Blackout blind (solar) – Optimised and discreet placement</li> <li>• Insect screen (manual, cleanable, removable)</li> </ul>	<ul style="list-style-type: none"> <li>• Anti-heat blind (solar)</li> <li>• Translucent and blackout blinds (electrical/solar)</li> </ul>	

\* Daylight area stated as per method in EAD 220062-00-0401 (CE marking). Numbers mentioned are for a size 100100.

\*\* U-value, area and sound insulation is stated for fixed variants with either 2-layer dome (dome), Q variant 2-layer glazing unit (dome with glazing) and 2-layer glazing unit (flat glass and curved glass). U-values and areas are calculated for window size 1.2x1.2m, with a kerb height of 300 mm, in accordance with method in EN 1873:2014+A1:2016.

\*\*\* Complies with EU legislative requirements for burglary resistance, class 2.



## Roof pitch




## Details

- The premium choice for homeowners with 0-15° roof pitches.
- Glass-to-edge curved glass top unit.
- Unique window construction with a slim frame and invisible sash.
- Available with double or triple glazing for excellent energy performance and sound reduction.
- Laminated insulated glass unit for safety.
- Burglary resistant\*.
- Comes in a fixed, electric, and solar powered variant.
- Electric and solar powered variant delivers fresh air at the touch of a button and has an integrated rain sensor.

\* Complies with EU legislative requirements for burglary resistance, class 2.

## Blind options

The blinds are discreetly placed in the base-unit construction, between the lower pane and outer glass, and do not compromise daylight, design or your views to the sky. See more about blinds options on page 120.

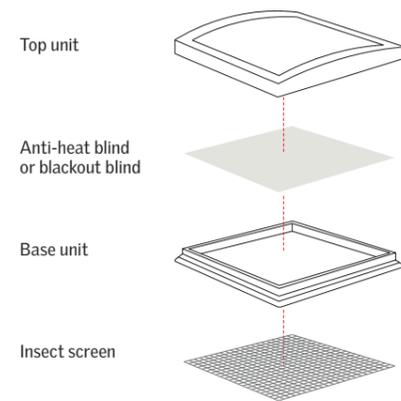

Mounting of blinds is done most conveniently during the rooflight installation process.

## Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

Read more on page 21.

## Details

- On all rectangular sizes, the motor is placed on the long side. Please, refer to the installation instructions for further details.

News

Solar variant!  
Bigger sizes!



Available sizes (w×h) cm	U-VALUE**		060060	090060	080080	090090	100100	120090	120120	150100	150150	200100
	Urc,ref300 W/(m²K)	Arc,ref300 Area m²								NEW	NEW	NEW
			60×60	90×60	80×80	90×90	100×100	120×90	120×120	150×100	150×150	200×100

Top cover		060060	090060	080080	090090	100100	120090	120120	150100	150150	200100
ISU 1093	Curved glass top unit	530	585	632	702	780	811	1,014	1,029	1,404	1,474

Base		060060	090060	080080	090090	100100	120090	120120	150100	150150	200100		
CFU 0020Q	Fixed base unit 2 layer glazing	0.65	4.4	375	419	447	497	552	574	673	690	905	949
CFU 0025Q	Fixed base unit 3 layer glazing	0.55	4.4	488	538	581	646	718	746	875	897	1,177	1,234
CVU 0220Q	Electric base unit 2 layer glazing	0.65	4.4	1,041	1,080	1,113	1,163	1,218	1,240	1,339	1,356	1,571	1,615
CVU 0225Q	Electric base unit 3 layer glazing	0.55	4.4	1,154	1,204	1,247	1,312	1,384	1,412	1,541	1,563	1,843	1,900
CVU 0320Q <b>NEW</b>	Solar powered base unit 2 layer glazing	0.65	4.4	1,134	1,173	1,206	1,256	1,311	1,333	1,432	1,449	1,664	1,708
CVU 0325Q <b>NEW</b>	Solar powered base unit 3 layer glazing	0.55	4.4	1,247	1,297	1,340	1,405	1,477	1,505	1,634	1,656	1,936	1,993

Installation accessories		060060	090060	080080	090090	100100	120090	120120	150100	150150	200100
ZCU 0015	Extension kerb 150mm	220	233	235	245	253	265	303	293	344	362
ZZZ 210U	Frame fixing kit	51	54	54	56	58	59	65	68	79	83
LSF 2000	Lining*	302	324	331	346	360	367	389	403	432	-

\* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.  
\*\* Calculated for a reference size of 1.2x1.2 m and 300 mm upstand, in a 0° roof pitch.  
New sizes available from summer 2022. Solar powered variant available from autumn 2022.

All prices in EUR (€)  
Find all sizes and prices on velux.ie

## New generation

# Curved glass rooflight

Fixed or vented option available

The VELUX curved glass rooflight is a revolution in roof window design. The unique design with a slim frame and invisible sash provides maximum daylight and a beautiful glass-to-edge view from inside the home – even with a blind installed. In addition, the curved-shaped glass top allows rainwater to easily drain off the surface – even on 0° roof pitches.

- Maximum daylight area
- Excellent energy performance
- State-of-the art design
- Excellent sound reduction
- Clear view and drainage



## Roof pitch




## Details

- The elegant choice for roof pitches from 2-15°.
- Glass-to-edge flat glass top unit.
- Unique window construction with a slim frame and invisible sash.
- Available with double or triple glazing for excellent energy performance and sound reduction.
- Laminated insulated glass unit for safety.
- Burglary resistant\*.
- Comes in a fixed, electric, and solar powered variant.
- Electric and solar powered variant provides fresh air at the touch of a button and has an integrated rain sensor.

\* Complies with EU legislative requirements for burglary resistance, class 2.

## Blind options

The blinds are discreetly placed in the base-unit construction, between the lower pane and outer glass, and do not compromise daylight, design or your views to the sky. See more about blinds options on page 120.

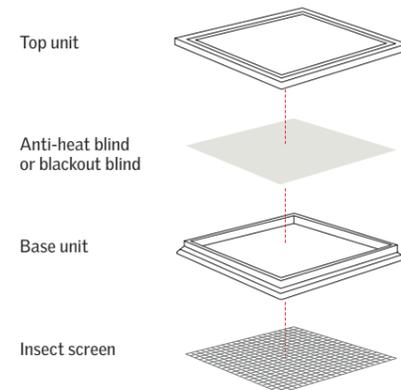

Mounting of blinds is done most conveniently during the rooflight installation process.

## Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

Read more on page 21.

## Details

- On all rectangular sizes, the motor is placed on the long side. Please, refer to the installation instructions for further details.

## New generation

# Flat glass rooflight

Fixed or vented option available

The VELUX flat glass rooflight will bring the magic of daylight into your home. The unique design with a slim frame and invisible sash provides maximum daylight and a beautiful design from inside the home – even with a blind installed.

- Maximum daylight area
- Excellent energy performance
- State-of-the art design
- Excellent sound reduction



## News

Solar variant!  
Bigger sizes!

Available sizes (w×h) cm	U-VALUE**		060060	090060	080080	090090	100100	120090	120120	150100	150150	200100
	Urc,ref300 W/(m²K)	Arc,ref300 Area m²								NEW	NEW	NEW
			60×60	90×60	80×80	90×90	100×100	120×90	120×120	150×100	150×150	200×100

## Top cover

ISU 2093	Flat glass top unit	381	421	454	505	561	583	729	741	1,010	1,060
----------	---------------------	-----	-----	-----	-----	-----	-----	-----	-----	-------	-------

## Base

CFU 0020Q	Fixed base unit 2 layer glazing	0.75	4.1	375	419	447	497	552	574	673	690	905	949
CFU 0025Q	Fixed base unit 3 layer glazing	0.60	4.1	488	538	581	646	718	746	875	897	1,177	1,234
CVU 0220Q	Electric base unit 2 layer glazing	0.75	4.1	1,041	1,080	1,113	1,163	1,218	1,240	1,339	1,356	1,571	1,615
CVU 0225Q	Electric base unit 3 layer glazing	0.60	4.1	1,154	1,204	1,247	1,312	1,384	1,412	1,541	1,563	1,843	1,900
CVU 0320Q <b>NEW</b>	Solar powered base unit 2 layer glazing	0.75	4.1	1,134	1,173	1,206	1,256	1,311	1,333	1,432	1,449	1,664	1,708
CVU 0325Q <b>NEW</b>	Solar powered base unit 3 layer glazing	0.60	4.1	1,247	1,297	1,340	1,405	1,477	1,505	1,634	1,656	1,936	1,993



## Installation accessories

ZCU 0015	Extension kerb 150mm	220	233	235	245	253	265	303	293	344	362
ZZZ 210U	Frame fixing kit	51	54	54	56	58	59	65	68	79	83
LSF 2000	Lining*	302	324	331	346	360	367	389	403	432	-

\* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.

\*\* Calculated for a reference size of 1.2x1.2 m and 300 mm upstand, in a 0° roof pitch.  
New sizes available from summer 2022. Solar powered variant available from autumn 2022.

All prices in EUR (€)  
Find all sizes and prices on velux.ie

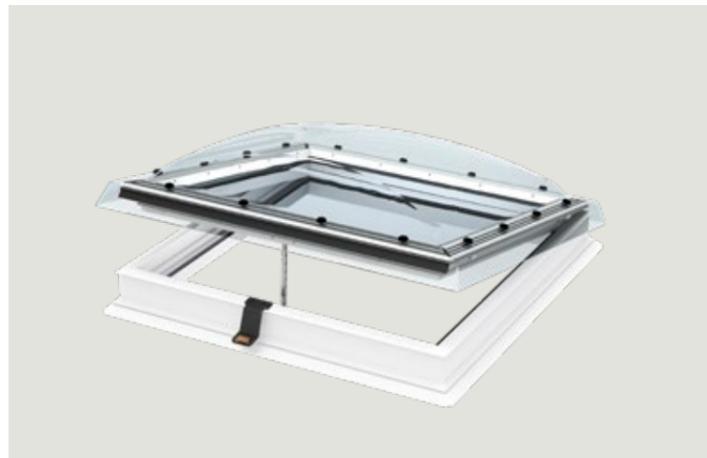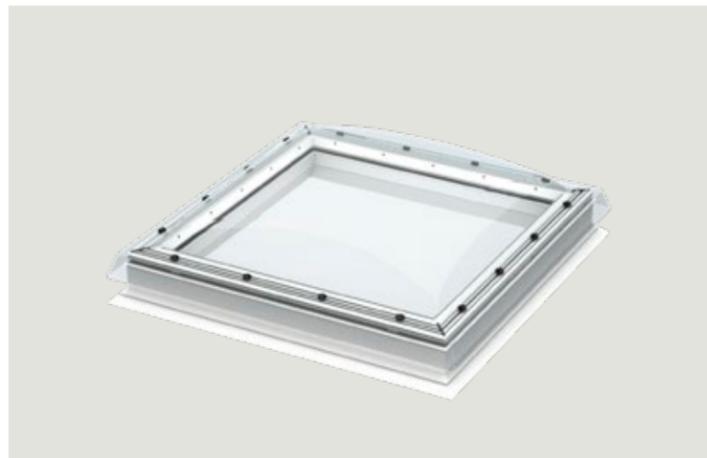

## Roof pitch



## Details

- Opaque dome for optimal privacy or clear dome for daylight and view to the sky.
- Base unit construction with insulating glass unit provides good thermal insulation.
- Comes with double glazing.
- Laminated insulated glass unit for safety
- Burglary resistant variant available\*.
- Comes in a fixed or electrically-vented variant.
- Electrically-vented variant provides fresh air at the touch of a button and has an integrated rain sensor.

\* Complies with EU legislative requirements for burglary resistance, class 2.


## Blind options

Considering blinds at the same time as the window is recommended. There are different blind options to choose from, both for heat protection and blackout purposes. See more about blinds options on page 122.


Top unit



Anti-heat blind



Base unit



Translucent or blackout blind



## Intelligent home control

- Combine your VELUX electric products with our intelligent home control solutions for multiple product operation, scheduling and automation

Read more on page 21.

# Dome with glazing

Fixed or vented option available

The VELUX dome with glazing is an advanced dome solution for installation in 0-15° roof pitches. It is an effective product for letting in daylight and fresh air, without compromising on energy efficiency and comfort with sun and heat protection products. The insulated base unit has an integrated 2-layer insulating glass unit and the polycarbonate top unit is available in a clear or opaque version.

- Good daylight area
- Good energy performance
- Classic design
- Good sound reduction



Available sizes (w x h) cm	U-VALUE**		060060	060090	080080	090090	100100	090120	120120	100150	150150
	W/m <sup>2</sup> K	Area	60x60	60x90	80x80	90x90	100x100	90x120	120x120	100x150	150x150
			<input type="checkbox"/>								


Top unit		060060	060090	080080	090090	100100	090120	120120	100150	150150
ISD 0010	Clear polycarbonate dome	236	252	266	305	332	352	432	438	598
ISD 0110	Opaque polycarbonate dome	236	252	266	305	332	352	432	438	598

Base unit		060060	060090	080080	090090	100100	090120	120120	100150	150150		
CFP 0073QV	Fixed, burglary-resistant base	0.80	3.4	356	382	402	462	502	532	612	643	808
CVP 0673QVA	Electrically vented burglary-resistant base	0.80	3.4	952	978	998	1,058	1,098	1,128	1,208	1,239	1,404

Installation accessories		060060	060090	080080	090090	100100	090120	120120	100150	150150
ZCE 0015	Extension frame with flange	220	233	235	245	253	256	290	304	374
ZZZ 210	Frame fixing kit for roof felt	51	54	54	56	58	59	65	68	79
BBX 0000C	Vapour barrier collar	30	32	33	34	35	35	39	41	48
LSF	Lining*	302	324	331	346	360	367	389	403	432

\* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.  
 \*\* Calculated for a reference size of 1.2x1.2 m and 300 mm upstand, in a 0° roof pitch.

All prices in EUR (€)  
 Find all sizes and prices on velux.ie

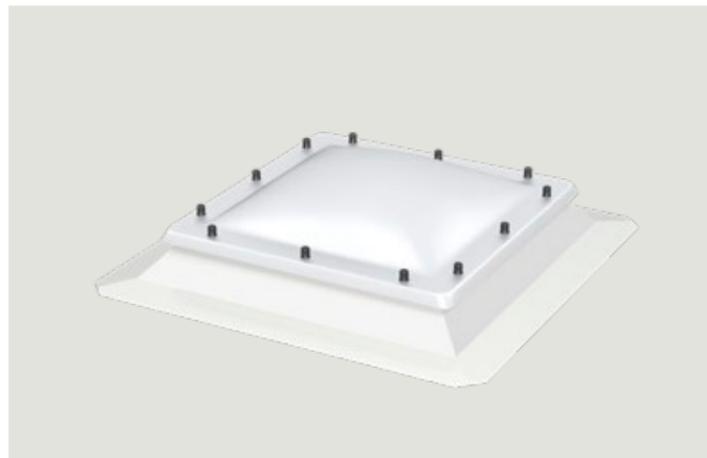

## Roof pitch



## Details

- Available with 2 and 3-layer opaque dome skins in polycarbonate.
- Opaque surface provides diffused daylight, improving the light needed for working.
- Choose between 15 and 30 cm upstand.
- Comes in a fixed or electrically-vented variant.

## Replacement frame

- Replace your existing, third-party dome solution with the help of a replacement frame.
- A quick and easy solution for replacement purposes.
- No need to install a new base unit.
- Fits all VELUX dome tops.

ZCJ 0000



## Replacement kit for ventilation

- Turn your fixed dome solution into electrically ventilated with this replacement kit.
- Combine with Replacement Frame to upgrade third-party domes to ventilated.

ZCJ 1210



## Details

- On all rectangular sizes, the motor is placed on the long side. Please, refer to the installation instructions for further details.



# Dome

Fixed or vented options for uninhabited rooms or buildings

The VELUX dome is a traditional dome solution for uninhabited rooms or buildings, such as warehouses, garages, sheds, or smaller industrial buildings. It is available in a fixed or vented version, and with 2 or 3-layer dome skins. A motor and vented frame can be added to the fixed variant to add ventilation – even after installation. Available with fall through grid for added safety. No blinds are available for this product.

- Basic daylight area
- Basic energy performance



Available sizes (w×h) cm	U-VALUE*		060060	090060	080080	090090	100100	012090	120120	150100	150150	200100
	W/m² K	Area m²	60×60	90×60	80×80	90×90	100×100	120×90	120×120	150×100	150×150	200×100
			<input type="checkbox"/>									


Top cover												
ISJ 0112	2 layer polycarbonate dome skin	178	192	204	287	296	328	414	521	675	639	
ISJ 0113	3 layer polycarbonate dome skin	212	270	287	404	416	462	582	732	949	899	

Base		2-layer 3-layer												
CFJ 0010	Fixed base unit 15 cm	2.2	1.7	2.6	216	248	252	275	293	303	357	410	527	533
CFJ 1010	Fixed base unit 30 cm	2.2	1.7	2.6	293	343	360	398	416	422	480	533	650	-
CVJ 0210	Electric base unit 15 cm	2.0	1.6	3.1	760	810	827	865	883	889	947	1,000	1,117	1,123
CVJ 1210	Electric base unit 30 cm	2.0	1.6	3.1	993	1,043	1,060	1,098	1,116	1,122	1,180	1,233	1,350	-

Installation accessories												
ZZZ 210J	Securing kit for roofing material	56	63	64	67	73	78	87	89	108	-	
ZCJ 0000	Replacement Frame	145	-	157	173	179	-	213	-	-	-	
ZCJ 1210	Replacement kit for ventilation	471	-	492	518	527	-	583	-	-	-	

\* Calculated for a reference size of 1.2x1.2 m and 300 mm upstand, in a 0° roof pitch.

All prices in EUR (€)  
Find all sizes and prices on velux.ie

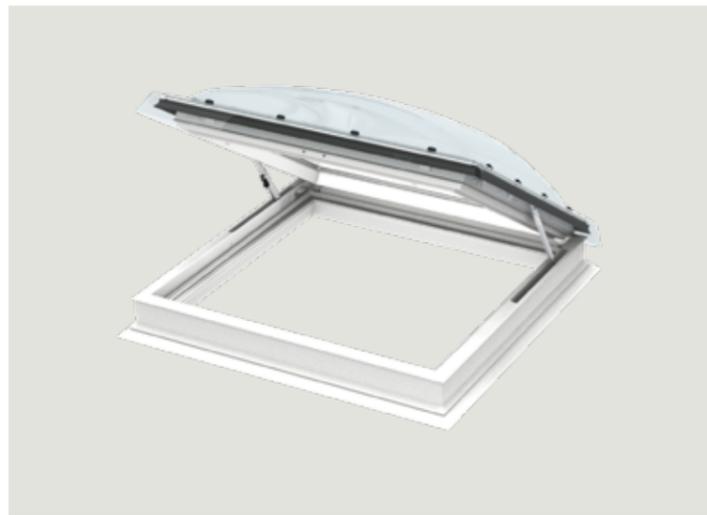

### Roof pitch



### Details

- Note: this product is not compatible with VELUX flat roof blinds FMG, FMK and MSG.



## Roof exit


The manually-operated flat roof exit window opens extra wide to provide easy access to the roof. Fully compliant with all relevant EU legislative requirements, the VELUX flat roof exit is a double-glazed roof window with a laminated inner pane that prevents glass from splintering in the event of breakage. It is available with an opaque or clear polycarbonate dome.

- Extra-large opening for easy access to the roof
- Improved comfort with low-energy double glazing
- Tilted interior frame increases daylight in the room
- Opening angle of approximately 60°
- Excellent insulating value and sound reduction

Available sizes (w×h) cm	U-VALUE*		090120	100100	120120	
	W/m² K	Area	90×120	100×100	120×120	
<b>Top Cover</b>						
ISD 0010	Clear polycarbonate dome		352	332	432	
ISD 0110	Opaque polycarbonate dome		352	332	432	
<b>Base</b>						
CXP 0473Q	Manually operated flat roof window base	0.86	3.4	1,075	1,014	1,237
<b>Accessories</b>						
ZCE 0015	Extension kerb 150 mm		256	253	290	
ZZZ 210	Frame fixing kit for roof material		59	58	65	

\* Calculated for a reference size of 1.2x1.2 m and 300 mm upstand, in a 0° roof pitch.

All prices in EUR (€)  
Find all sizes and prices on velux.ie

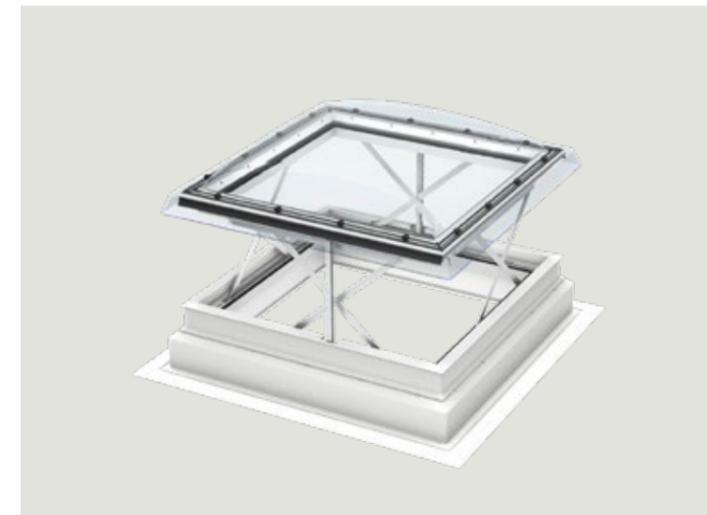


### Roof pitch



### Details

- Compatible with VELUX flat roof blinds FSK and MSG. An approval by local fire authorities is needed before installation.



## Smoke ventilation

The smoke ventilation flat roof window automatically opens when smoke and fire are detected to release smoke and excess heat. It can also be opened for fresh air to improve the indoor climate. Its burglar-proof construction provides additional security while a laminated inner pane prevents glass from shattering if it breaks.

- Available for 0.88m² (100x100cm) or 1.30m² (120x120cm) of smoke-free ventilation area
- Compliant with EU legislative requirements
- Automatically opens in case of fire
- Heavy-duty reliable scissor opening mechanism
- Low-energy double glazing with two energy coatings
- Tested and certified to EN ISO 12101-2

Available sizes (w×h) cm	U-VALUE**		100100	120120
	W/m² K	Area	100×100	120×120

### Smoke Ventilation System

ISD 0010	Clear polycarbonate dome		332	432
ISD 0110	Opaque polycarbonate dome		332	432

### Base

CSP 1073Q	Flat roof smoke ventilation window	0.99	3.4	2,008	2,450
-----------	------------------------------------	------	-----	-------	-------

### Specific smoke ventilation accessories

KFC 210	Control unit for 1 CSP		-	785
KFC 220	Control unit for 2 CSP		-	1,017
KFA 100	Smoke detector		-	96
KFK 100	Break-glass point		-	96

\*\* Calculated for a reference size of 1.2x1.2 m and 300 mm upstand, in a 0° roof pitch.

All prices in EUR (€)  
Find all sizes and prices on velux.ie

## Roof pitch



## Exterior finish options



Jet Black  
RAL9005

Traffic Grey  
RAL7043

## Rooflight options

- Fixed up to 4m<sup>2</sup>
- Opening up to 4m<sup>2</sup>
- Walk-on up to 2m<sup>2</sup>
- Round up to Ø 1350 mm
- Unlimited up to 4m<sup>2</sup> per module

## Details

- The elegant choice for roof pitches from 0-15° (with a recommendation for the rooflights to be installed at a minimum pitch of 5°).
- Glass-to-edge flat glass top unit.
- Unique window construction with a slim frame and invisible sash.
- Available with double or triple glazing for excellent energy performance and sound reduction.
- Laminated insulated glass unit for safety.
- Burglary resistance\*.
- Comes in a fixed or electrically-vented variant.
- Electrically-vented variant provides fresh air at the touch of a button and a pre-installed rain sensor.
- io-homecontrol compatible including VELUX remote controls and VELUX ACTIVE

\* Complies with EU legislative requirements for burglary resistance, class 2.

## Contact us

vario@velux.ie  
+44 (0) 1592 778 246

# Vario by VELUX



Bespoke rooflights for any project

Design and build your rooflights just the way you want them with Vario by VELUX. Use the Build Your Own configurator tool available on the Vario website to create flat roof iconic designs for your project. The tool gives you a 3D illustration of the rooflight and access to real-time prices.

- Custom-made designs for all types of project
- Huge variety of shapes, colours and features
- Sizes up to 4m<sup>2</sup> of clear internal glass

For further information visit: [vario.velux.com](http://vario.velux.com)




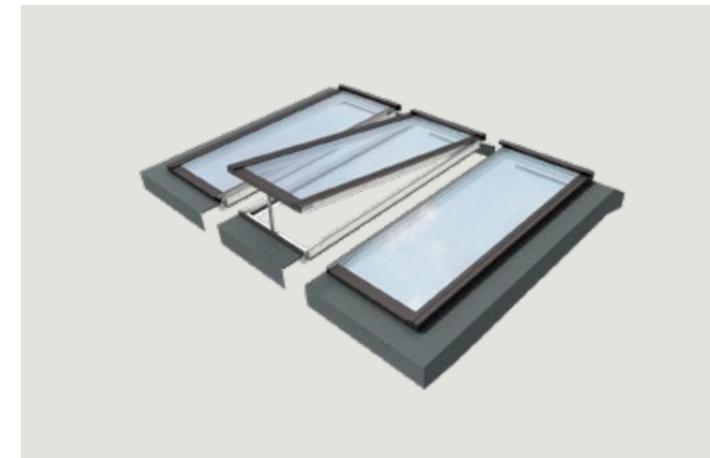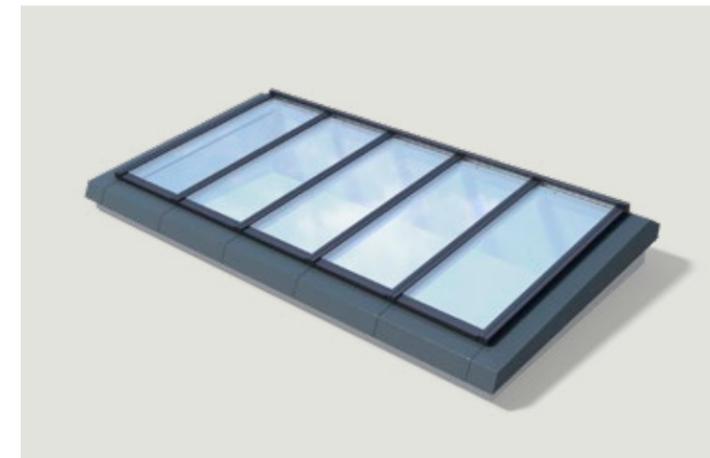

### Roof pitch



### Exterior finish options



Cladding  
Noir 2100 Sable  
(Granite 60)

Flashing  
RAL 7043  
Gloss 30

### Details

VELUX Modular Skylights are available in a range of convenient installation packages to meet the needs of your project.

For further information, please visit [velux.ie/vmsdomestic](http://velux.ie/vmsdomestic)

### Contact us

[sales@veluxcommercial.co.uk](mailto:sales@veluxcommercial.co.uk)  
+44 (0) 1592 778 916

## Modular Skylights

Open up larger roof expanses

VELUX Modular Skylights are specially designed to bring more natural light directly from above, right into the heart of your room. Modularity allows you to design with daylight over larger roof expanses for a stylish end result that blends in more with the surroundings.

- Customised for your project
- Elegant look inside and out
- Concealed electrics and motors within vented modules
- Ideal for modern flat roof homes



# Sun tunnels

## Sun tunnels


For sloped roofs

For flat roofs



Page 80



### Roof pitch



### Tunnel options



### Light diffuser Edge Glow

- Our EdgeGlow light diffuser spreads the light from the sun tunnel throughout the room

See image on page 81.



## Sun tunnel for sloped roofs

Rigid and flexible tunnel options available

Add natural light to spaces where you never felt it was possible with VELUX sun tunnels. Perfect for windowless bathrooms, walk-in wardrobes and hallways.

Use rigid sun tunnels when there is direct access between the roof and the ceiling of the room. Flexible sun tunnels should be used when there is an object, such as a beam, restricting access.

### Rigid sun tunnels

- Recommended for maximum daylight, due to the super high reflective coating
- Up to 98% daylight reflectivity for optimal natural light conditions
- Elegant, maintenance-free exterior glass module
- Recommended tunnel length 0.9-6m
- 1.7m tunnel supplied (ZTR extensions are available)
- Available in 10 and 14 inch diameters

### Flexible sun tunnels

- Flexible fibreglass tunnel, with reflective inner coating
- Elegant maintenance-free exterior glass module
- Recommended tunnel length is 1.5m
- 2m tunnel supplied
- Available in 14 inch diameter

Tunnel Diameter	10"/25 cm	14"/35 cm
External frame size (w×h) cm	37×37	46×46

### Rigid Sun Tunnels

TWR 0K10 2010	10" diameter rigid tunnel for tiles up to 120mm in profile.	387	-
TLR 0K10 2010	10" diameter rigid tunnel for slate up to 8mm thick.	387	-
TWR 0K14 2010	14" diameter rigid tunnel for tiles up to 120mm in profile.	-	445
TLR 0K14 2010	14" diameter rigid tunnel for slate up to 8mm thick.	-	445

### Flexible Sun Tunnels

TWF 0K14 2010	14" diameter flexible tunnel for tiles up to 120mm in profile.	-	387
TLF 0K14 2010	14" diameter flexible tunnel for slate up to 8mm thick.	-	387

### Accessories

ZTR 0K10 0062	600 mm extension section for 10" rigid diameter sun tunnel.	77	-
ZTR 0K14 0062	600 mm extension section for 14" rigid diameter sun tunnel.	-	77
ZTR 0K14 0124	1,200 mm extension section for 14" rigid diameter sun tunnel.	-	148
ZTL 014	Low-energy light kit for 10" and 14", fits inside tunnel, requires mains connection. Bulb supplied.	-	92

All prices in EUR (€)  
Find all sizes and prices on velux.ie




### Roof pitch



### Tunnel options

Flexible



### Light diffuser Edge Glow

- Our EdgeGlow light diffuser spreads the light from the sun tunnel throughout the room

See image on page 83.

## Sun tunnel for flat roofs

Flexible tunnel

Used for installation in flat roofs to bring natural light into areas of the house where a flat roof window installation is either not possible or not appropriate. The frame is made of white PVC. Supplied with polycarbonate dome.

### Flexible sun tunnels

- Flexible fibreglass tunnel, with reflective inner coating
- Recommended tunnel length for flat roof is between 0.2m and 0.9m
- 0.9m tunnel supplied
- Available in 14 inch diameter

Tunnel diameter

14"/35cm

External frame size (w×h) cm

60x60




### Flexible Sun Tunnels

TCF OK14 1010	14" diameter flat-roof flexible tunnel with polycarbonate cover.	467
---------------	--	-----

### Accessories

ZTL 014	Low-energy light kit for 10" and 14", fits inside tunnel, requires mains connection. Bulb supplied.	92
---------	---	----

All prices in EUR (€)  
Find all sizes and prices on [velux.ie](http://velux.ie)

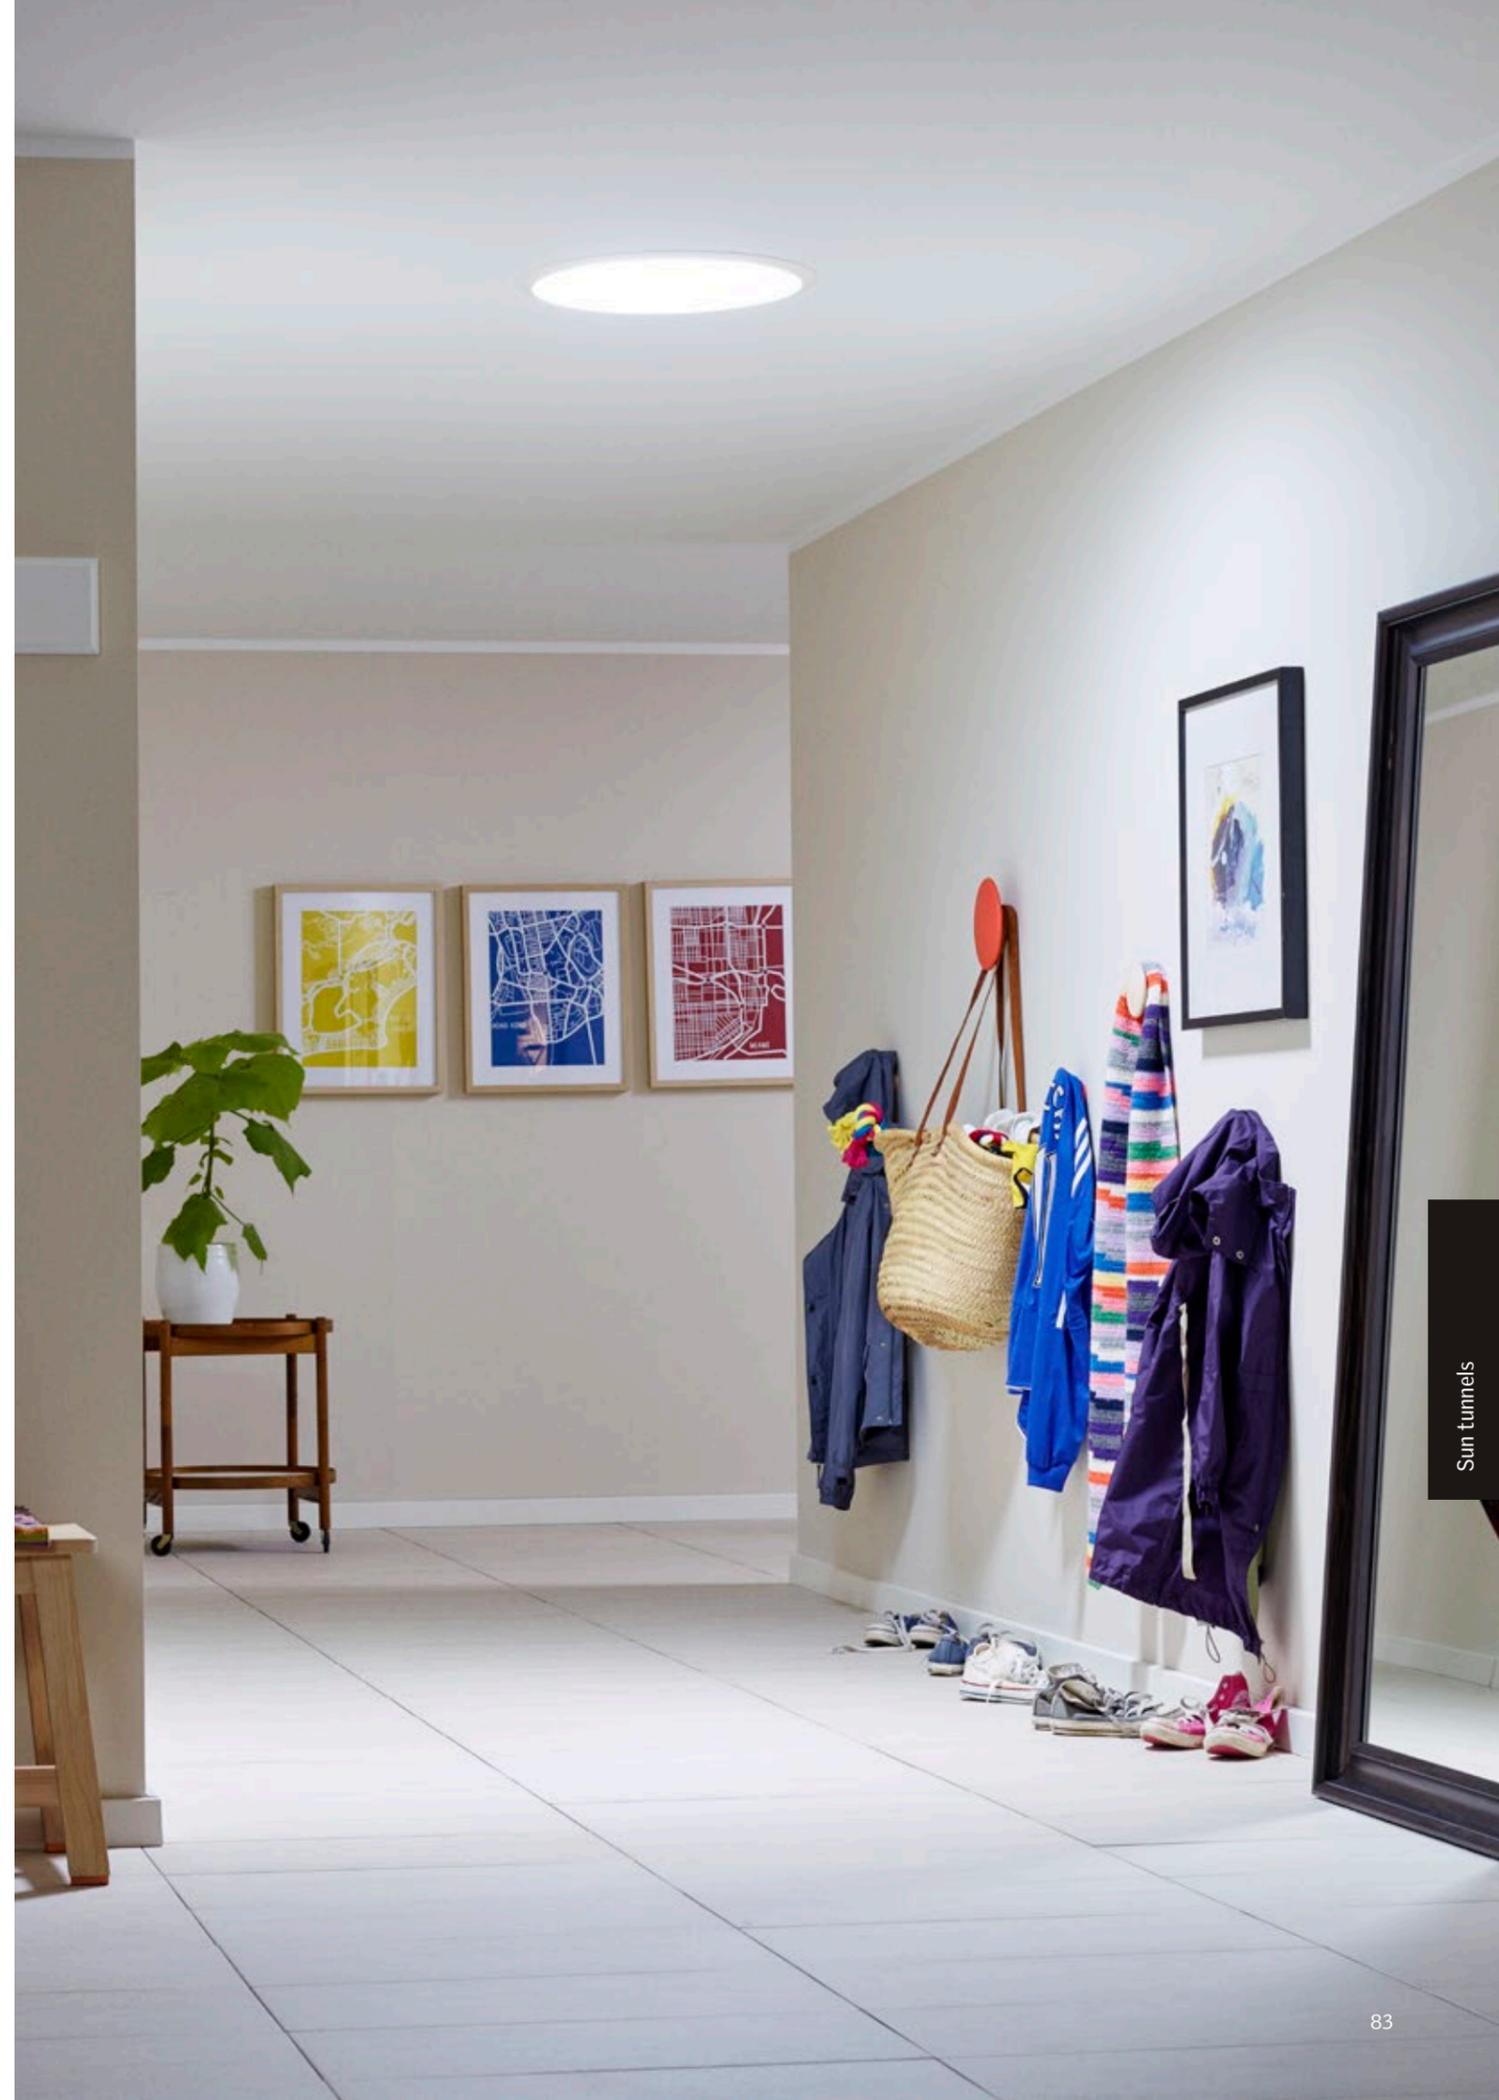



# Installation and flashings

---

## Installation products

Page 87

---

## Flashings

Page 88

- Standard flashings
- Recessed flashings
- Flashings for combinations and extensions
- Solar integrator flashings
- Replacement flashings




For efficient installation and a superior result.



Insulation collar BDX



Underfelt collar BFX

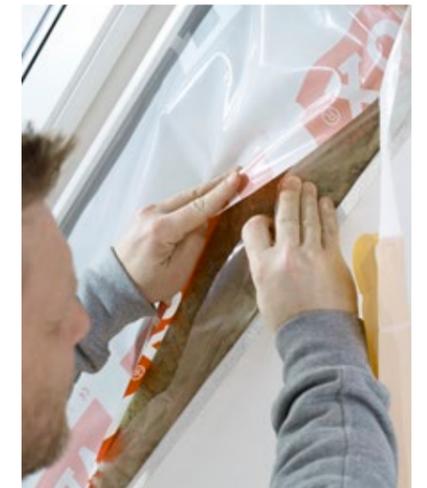

Vapour barrier BBX

## Installation products

For long-lasting performance from your VELUX roof windows, always use VELUX installation products. They are specifically designed for use with VELUX roof windows and require no special adaptation.

VELUX installation products make it easy to install VELUX roof windows quickly and efficiently and protect against the risk of water penetration, mould and condensation for durability and indoor comfort.

What's more, just like other VELUX products, the VELUX range of installation products meet the same exacting standards of quality so your customers can enjoy their roof windows for generations to come.

### Insulation collar BDX

- Insulates around the roof window frame, reducing heat loss and eliminating cold bridges
- Flexible insulation frame can be compressed for quick installation
- Supplied with BFX underfelt collar
- Click fittings ensure a fast and accurate assembly

### Underfelt collar BFX

- Ensures a watertight seal between the roof window and the roof
- Made from diffusion open material to minimise the risk of condensation
- Comes with transverse drainage gutter to lead water away from the head of the roof window if a tile or slate is broken above the window

### Vapour barrier BBX

- Helps prevent condensation from forming in the roof structure
- A fully welded rubber gasket with a double pressure seal guarantees speedy installation and a vapour and airtight solution
- Reinforced corners for extra security against perforation

External frame sizes (w×h) cm	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
	55×78	55×98	55×118	66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140

Underfelt collar BFX	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
BFX 1000	27	28	29	30	30	32	33	33	34	36	35	36	35	37
Insulation collar BDX	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
BDX 2000 (including BFX)	39	40	42	44	44	46	48	48	50	52	50	52	50	54
Vapour barrier BBX	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
BBX 0000	28	29	30	31	31	32	34	34	35	37	36	37	36	38

All prices in EUR (€)  
Find all sizes and prices on [velux.ie](http://velux.ie)

# Guide to using original VELUX flashing kits

VELUX flashing kits are designed to integrate your VELUX roof window perfectly into the roofing material, ensuring that your window is completely weathertight, whatever the conditions.

We offer a range of flashings designed for different roofing materials and provide two options for installation height.



## Standard roof window flashings

Standard installation height – install the brackets at the top and the bottom of the window frame, at the red line level.



## Recessed flashings

Recessed installation height – install the brackets at the sides of the roof window frame, at the blue line level.


Recessed flashings provide a sleek and streamlined finish as the roof window is installed 40 mm deeper into the roof structure, meaning that less of the roof window protrudes above the roofline. We recommend BDX insulation collar and BFX underfelt collar, included in EDN and EDJ 2000, for optimum energy efficiency.



Installation and flashings



### Roof pitch



EDW 15°-90°  
EDL 15°-90°  
EDP 25°-90°  
EDT 20°-90°



EDW



EDL



EDP



EDT

## Standard flashings

We provide a range of flashing options to suit your roofing material.

### Profiled roofing material EDW

- For profile roofing material up to 120 mm
- Suitable for interlocking slate, thatch and profiled sheeting
- EDW 2000 variants come with installation products included
- Roof pitches from 15°-90°

### Slate EDL

- For slate up to 8 mm thick
- Not for interlocking slate. See EDW for details
- EDL 2000 variants come with installation products included
- Roof pitches from 15°-90°

### Plain tiles EDP

- For plain tiles (max length 300 mm)
- Maximum thickness of 14 mm
- Roof pitches from 25°-90°

### Flat tiles EDT

- For flat tiles 15-40 mm thick
- Designed for neater finish
- EDT 2000 variants come with installation products
- Roof pitches from 20°-90°

External frame sizes (w×h) cm	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
	55×78	55×98	55×118	66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140

### Standard flashings incl. installation products (BDX 2000)

EDW 2000	105	108	113	120	120	126	133	139	145	151	144	153	151	163
EDL 2000	105	108	113	120	120	126	133	139	145	151	144	153	151	163
EDT 2000	109	111	116	124	124	130	138	143	151	155	150	158	156	168

### Standard flashings

EDW 0000	74	76	79	85	85	89	95	101	106	110	105	112	112	121
EDL 0000	74	76	79	85	85	89	95	101	106	110	105	112	112	121
EDP 0000	74	76	79	85	85	89	95	101	106	110	105	112	112	121
EDT 0000	78	79	83	89	89	94	100	106	112	115	111	118	118	127

All prices in EUR (€)  
Find all flashing types, sizes and prices on velux.ie



Roof pitch



EDN



EDJ



## Recessed flashings

We provide a range of flashing options to suit your roofing material.

### Slate EDN

- For slate up to 8 mm thick
- EDN 2000 includes BDX 2000F insulation package as standard
- Not for interlocking slate
- Roof pitches from 20°-90°

### Flat or profiled roofing material EDJ

- For flat or profiled roofing material up to 90mm in profile
- EDJ 2000 includes BDX 2000F insulation package as standard
- Roof pitches from 20°-90°

External frame sizes (w×h) cm	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
	55×78	55×98	55×118	66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140

### Recessed flashings incl. installation products

EDN 2000	171	175	183	195	195	204	216	224	234	243	234	247	244	263
EDJ 2000	171	175	183	195	195	204	216	224	234	243	234	247	244	263


### Recessed flashings

EDN 0000	109	112	117	126	126	132	141	150	157	162	156	166	166	179
EDJ 0000	109	112	117	126	126	132	141	150	157	162	156	166	166	179

All prices in EUR (€)  
Find all flashing types, sizes and prices on [velux.ie](http://velux.ie)



### Roof pitch



EBW / EKW 15°-90°  
EBL / EKL 15°-90°  
EBP / EKP 25°-90°

## Flashings for combinations

If you want to use multiple VELUX roof windows in your room, VELUX combi flashings give you the interconnectivity needed for easy installation. They are designed for all combinations of VELUX roof windows and give a watertight installation.

- For multiple VELUX roof windows
- High-quality watertight installation
- Maintenance-free exterior



Side-by-side combination



Triple combination

### Side-by-side combination

External frame sizes (w×h) cm	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
55×70	55×78	55×98	66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140	

### Flashing for 18 mm frame distance

EBW 4021B* for profiled roofing material up to 120 mm	409	419	439	469	469	490	520	543	568	587	564	597	591	637
EBL 4021B* for slate up to 8 mm thick	409	419	439	469	469	490	520	543	568	587	564	597	591	637
EBP 4021B* for plain tile up to 28 mm (2 x 14 mm)	409	419	439	469	469	490	520	-	568	587	564	-	591	637

### Flashing for 100 mm frame distance\*\*

EKW 4021E* for profiled roofing material up to 120 mm	409	419	439	469	469	490	520	543	568	587	564	597	591	637
EKL 4021E* for slate up to 8 mm thick	409	419	439	469	469	490	520	543	568	587	564	597	591	637
EKP 4021E* for plain tile up to 28 mm (2 x 14 mm)	409	419	439	469	469	490	520	-	568	587	564	-	591	637
EKN 0021E for recessed installation into slate up to 8 mm thick	278	284	298	320	320	336	358	380	400	412	396	422	422	454
EKJ 0021E for recessed installation into profiled roofing material up to 120 mm	278	284	298	320	320	336	358	380	400	412	396	422	422	454

\* Includes installation products (BDX 2000, bearing beams and cover plate)

\*\* Choose 100 mm frame distance if anti-heat blackout shutters are needed.


### Triple combination

External frame sizes (w×h) cm	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
55×70	55×78	55×98	66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140	

### Flashing for 100 mm frame distance

EKW S0312 for profiled roofing material up to 120 mm	255	261	273	294	294	308	328	-	366	378	363	-	387	417
EKL S0312 for slate up to 8 mm thick	255	261	273	294	294	308	328	-	366	378	363	-	387	417

All prices in EUR (€)  
Find all flashing types, sizes and prices on [velux.ie](http://velux.ie)

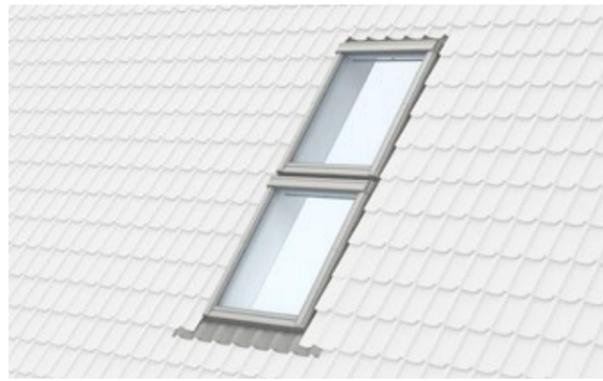

Duo combination

Quattro combination

Duo combination

External frame sizes (w×h) cm	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
	55×70	55×78	55×98	66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140

Flashing for 100 mm frame distance

	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
EKW S0122 for profiled roofing material up to 120 mm	185	189	197	212	212	222	237	252	265	274	263	280	280	301
EKL S0122 for slate up to 8 mm thick	185	189	197	212	212	222	237	252	265	274	263	280	280	301

Quattro combination

External frame sizes (w×h) cm	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
	55×70	55×78	55×98	66×118	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140

Flashing for 100 mm frame distance

	CK02	CK04	CK06	FK06	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
EKW S0222 for profiled roofing material up to 120 mm	392	400	418	450	450	471	503	535	562	580	558	594	594	638
EKL S0222 for slate up to 8 mm thick	392	400	418	450	450	471	503	535	562	580	558	594	594	638

All prices in EUR (€)  
Find all flashing types, sizes and prices on velux.ie



Sloping and fixed



Sloping and vertical

Sloping and fixed

External frame sizes (w×h) cm	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140

Flashing for upper element

	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
EDW 0000 for profiled roofing material up to 120 mm	85	89	95	101	106	110	105	112	112	121
EDL 0000 for slate up to 8 mm thick	85	89	95	101	106	110	105	112	112	121
EDJ 0000 for recessed installation into profiled roofing material up to 90 mm	126	132	141	150	157	162	156	166	166	179
EDN 0000 for recessed installation into slate up to 8mm thick	126	132	141	150	157	162	156	166	166	179

Flashing for extension element

	WK34									
	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
ETW 0000 for profiled roofing material up to 120 mm	57	57	57	57	57	57	57	57	57	57
ETL 0000 for slate up to 8 mm thick	57	57	57	57	57	57	57	57	57	57
ETJ 0000 for recessed installation into profiled roofing material up to 90 mm	120	120	120	120	120	120	120	120	120	120
ETN 0000 for recessed installation into slate up to 8mm thick	120	120	120	120	120	120	120	120	120	120

Sloping and vertical

External frame sizes (w×h) cm	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
	78×98	78×118	78×140	94×118	94×140	94×160	114×118	114×140	134×98	134×140

Flashing

	MK04	MK06	MK08	PK06	PK08	PK10	SK06	SK08	UK04	UK08
EFW 0012 for profiled roofing material up to 120 mm	149	156	167	177	186	192	184	196	196	211
EFL 0012 for slate up to 8 mm thick	149	156	167	177	186	192	184	196	196	211
EFJ 0012 for recessed installation into profiled roofing material up to 90 mm	255	268	286	303	319	329	316	337	337	362
EFN 0012 for recessed installation into slate up to 8 mm thick	255	268	286	303	319	329	316	337	337	362


All prices in EUR (€)  
Find all flashing types, sizes and prices on velux.ie



### Roof pitch



### Colour options



## Solar integrator flashings

The VELUX Solar Integrator is a specially designed flashing that perfectly connects VELUX roof windows to a variety of solar panel build-in systems. Our solution ensures that your roof window will fit perfectly into the PV grid with an easy, fast, safe and seamless integration.

- Easily integrated with selected solar panel systems
- 25 mm sideways flexibility for perfect positioning
- Tested to withstand extreme weather conditions

External frame sizes (w×h) cm	MK06	MK08	PK08	SK10
	78×118	78×140	94×140	114×160
				

#### VELUX Solar Integrator flashing

ODL 050001 - Black. For GSE and Viridian solar panel solutions	120	129	143	157
ODL 000001 - Grey. For GSE and Viridian solar panel solutions	120	129	143	157

Compatible with selected solar panel systems. All prices in EUR (€) Find all sizes and prices on [velux.ie](http://velux.ie)






EW



EL

### Roof pitch



EW 15°-90°  
EL 15°-90°  
ELX 15°- 80°

### Details

- Minimal disruption as existing lining is retained
- Work can be carried out from the inside
- Replacement installation usually takes under a day
- For flat or profiled roofing material

For replacing single roof windows installed after April 2001 read more about standard flashing options on page 90.

### Benefits of replacing your roof window

- Better energy efficiency – modern roof windows have better thermal insulation properties and are up to 115% more energy efficient.
- More light and fresh air – new VELUX roof windows have larger glazed areas and come in white finishes to match modern interiors.
- More choice, more comfort – modernise your roof windows, from improving noise reduction to controlling from your smart phone, a solution for every project.



Type signs for old roof windows manufactured before April 2001



Find a VELUX Certified Installer near you:  
[velux.ie/findinstaller](http://velux.ie/findinstaller)

## Replacement flashings

VELUX replacement flashings make it easy to replace VELUX roof windows without removing the existing lining. The roof windows are simply replaced in the existing aperture. This lets you enjoy a new window without the extra work involved in interior decoration or bathroom retiling.

### Profiled roofing material EW

- For replacing a VELUX roof window from before April 2001 while maintaining the original installation level of the window
- For profiled roofing material up to 120 mm

### Slate EL

- For replacing a VELUX roof window from before April 2001 while maintaining the original installation level of the window
- EL is a flashing for slate up to 8 mm thick

### Flashing adaptor ELX

The flashing adaptor kit ELX is used for replacing window combinations and also in conjunction with standard single flashings like EDW and EDL when replacing an old window where the internal finish is not being replaced and the roof window is placed more above the "red line" than normal.

External frame sizes (w×h) cm	CK01	CK02	CK04	FK06	MK04	MK06	MK08	PK08	PK10	SK06	UK04	UK08
	55×70	55×78	55×98	66×118	78×98	78×118	78×140	94×140	94×160	114×118	134×98	134×140

For replacing single roof windows installed before April 2001 window size to be replaced shown in brackets

(9)	102	(6)	206	304 (1)	306 (14)	308 (2)	408	410 (3)	606 (4)	804 (7)	808 (7)
-----	-----	-----	-----	---------	----------	---------	-----	---------	---------	---------	---------

Replacement flashings		CK01	CK02	CK04	FK06	MK04	MK06	MK08	PK08	PK10	SK06	UK04	UK08
EW 0000	Flashing for profiled roofing material up to 120 mm	84	84	86	97	97	102	109	121	125	120	128	138
EL 0000	Flashings for slate up to 8 mm thick	84	84	86	97	97	102	109	121	125	120	128	138
ELX 0000	Adaptor flashing for combinations Also for use in conjunction with EDL and EDW	74	74	76	85	85	89	95	106	110	105	112	121

All prices in EUR (€)  
Find all flashing types, sizes and prices on [velux.ie](http://velux.ie)



# Blinds and shutters

---

## Roller blinds

Page 106

Translucent or blackout  
Duo blackout  
Replacement blackout blind  
Colour by You  
Children's collection

---

## Pleated blinds

Page 114

Translucent or blackout energy

---

## Venetian blinds

Page 118

---

## Insect screen

Page 119

---

## Blinds for flat roof windows

Page 120

Anti-heat blind  
Blackout blind  
Insect screen  
Pleated blinds

---

## Heat protection products

Page 126

Anti-heat blackout shutter  
Anti-heat blackout blind  
Anti-heat blind

# Combine more products for optimal comfort


Pair your blinds with external anti-heat solutions

Buy your blind and awning together and save 10%\*



**Heat protection plus blackout**

Anti-heat blind +  
Blackout roller blind

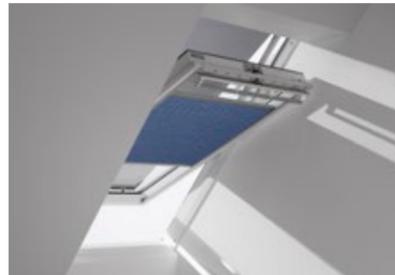

**Heat protection plus blackout and insulation**

Anti-heat blind +  
Blackout energy pleated blind



**Heat protection plus light dimming**

Anti-heat blind +  
Translucent roller blind

\*Only available on Standard (not Trend) colours.  
No promotional code required. Discount will be applied automatically.



Choose an exterior product for heat protection

See more on page 126



Pick your interior blind for light control

See more on page 106




Add an interior insect screen for further comfort

See more on page 119



## Colour options

### Standard colours

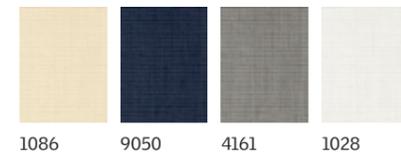

### Trend colours



## Installation

- Quick and easy installation with patented mounting brackets.

## White line blinds

- To order the blind with white side channels, simply add WL to the end of your product code.

## Certifications

- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances.

# Translucent roller blind

VELUX translucent roller blind provides basic privacy whilst still allowing in natural light. Perfect for living rooms, offices and playrooms.

- Softens incoming light and provides privacy
- Available with white or brushed aluminum side rails
- Available in manual, mains or solar powered operation

Most sold window sizes		CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08
Sizes (w×h) cm		55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140
		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
Manual RFL	Standard	76	76	82	90	94	96	96	100	106	128	120	124	106	128	146
	Trend	90	90	96	104	108	110	110	114	120	142	134	138	120	142	160
Mains-powered RML	Standard	165	165	171	179	183	185	185	189	195	217	209	213	195	217	235
	Trend	179	179	185	193	197	199	199	203	209	231	223	227	209	231	249
Solar-powered RSL	Standard	173	173	179	187	191	193	193	197	203	225	217	221	203	225	243
	Trend	187	187	193	201	205	207	207	211	217	239	231	235	217	239	257

Mains-powered RML and solar-powered RSL can be combined with intelligent home control solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 21.


All prices in EUR (€)  
Find all sizes and prices on [veluxshop.ie](http://veluxshop.ie)





### Colour options

#### Standard colours

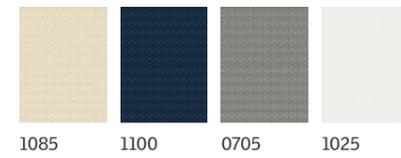

#### Trend colours



### Installation

- Quick and easy installation with patented mounting brackets.

### White line blinds

- To order the blind with white side channels, simply add WL to the end of your product code.

### Certifications

- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances.

## Blackout roller blind

The VELUX blackout roller blind offers blackout for darkness anytime. Ideal for bedrooms to ensure a good night's sleep or daytime nap.

- Fabric offers complete blackout
- Available with white or brushed aluminum side rails
- Available in manual, mains or solar powered operation

Most sold window sizes		CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08
Sizes (w×h) cm		55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140
Manual DKL	Standard	76	76	82	90	94	96	96	100	106	128	120	124	106	128	146
	Trend	90	90	96	104	108	110	110	114	120	142	134	138	120	142	160
Mains-powered DML	Standard	165	165	171	179	183	185	185	189	195	217	209	213	195	217	235
	Trend	179	179	185	193	197	199	199	203	209	231	223	227	209	231	249
Solar-powered DSL	Standard	173	173	179	187	191	193	193	197	203	225	217	221	203	225	243
	Trend	187	187	193	201	205	207	207	211	217	239	231	235	217	239	257


Mains-powered DML and solar-powered DSL can be combined with intelligent home control solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 21.

All prices in EUR (€)  
Find all sizes and prices on veluxshop.ie



### Colour options

#### Standard colours

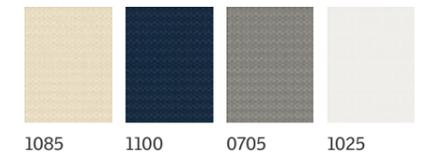

#### Trend colours



Always combined with white translucent pleated blind (1016)

## Duo blackout roller blind

A blackout roller blind and translucent pleated blind in one. It offers the best of both worlds – blackout at night and softly diffused light during the day.

- Choose any colour blackout roller blind combined with white pleated blind (1016)
- Available with white or brushed aluminum side rails
- Available with manual operation

### Installation

- Quick and easy installation with patented mounting brackets.

### White line blinds

- To order the blind with white side channels, simply add WL to the end of your product code.

### Certifications

- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances.


Most sold window sizes		CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08
Sizes (w×h) cm		55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140
Manual DFD	Standard	100	100	106	118	120	124	124	130	140	166	156	162	138	166	192
	Trend	114	114	120	132	134	138	138	144	154	180	170	176	152	180	206

All prices in EUR (€)  
Find all sizes and prices on veluxshop.ie



### Colour options

#### Standard colours

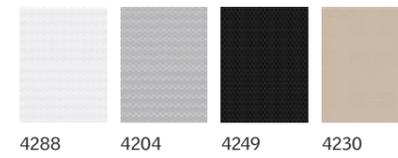

### Installation

- Quick and easy installation with patented mounting brackets.

### Certifications

- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances.

## Replacement blackout blind

The VELUX basic blackout blind is the perfect solution for roof windows manufactured before 2014. Ideal if you simply want to replace your old blind with a cost effective solution.

- Blackout effect
- Stepless positioning
- Only available for VELUX roof windows manufactured before 2014
- Available in 4 colours and comes with a 2 year guarantee

Most sold window sizes	C02	C04	M04	F06	M06	M08	U04	P08	S06	U08
Sizes (w×h) cm	55×78	55×98	78×98	66×118	78×118	78×140	134×98	94×140	114×118	134×140
DBL	54	58	66	68	70	74	90	84	88	102

All prices in EUR (€)  
Find all sizes and prices on [veluxshop.ie](http://veluxshop.ie)



## Colour by You


The Colour by You collection lets you customise your roller blinds. Choose from thousands of colours to create the look that you've been dreaming of. Get inspired by trying the colour selection tool at [veluxshop.ie](http://veluxshop.ie) and start customising your blinds today.

- Available in translucent, blackout and duo blackout roller blinds
- Available with white or brushed aluminium side rails

Most sold window sizes	CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08	
Sizes (w×h) cm	55×70	55×78	55×98	55×118	78×98	66×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140	
	RFL	90	90	96	104	108	110	114	120	142	134	138	120	142	160
	DKL	90	90	96	104	108	110	114	120	142	134	138	120	142	160
	DFD	114	114	120	132	134	138	144	154	180	170	176	152	180	206
	RML	179	179	185	193	197	199	203	209	231	223	227	209	231	249
	DML	179	179	185	193	197	199	203	209	231	223	227	209	231	249
	RSL	187	187	193	201	205	207	211	217	239	231	235	217	239	257
	DSL	187	187	193	201	205	207	211	217	239	231	235	217	239	257

Mains-powered DML and RML and solar-powered DSL and RSL can be combined with intelligent home control solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 21.

All prices in EUR (€)  
Find all sizes and prices on [veluxshop.ie](http://veluxshop.ie)

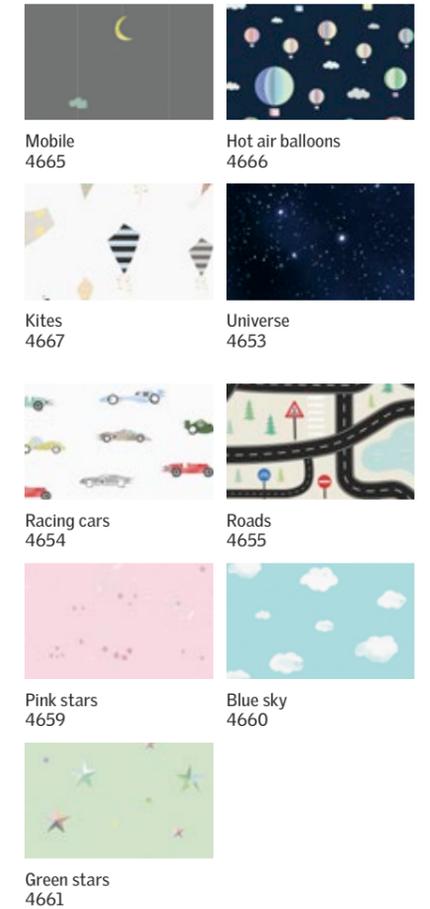

## Children's collection

The greatest adventures start with a good night's sleep. Blackout roller blinds and duo blackout roller blinds are available in inspirational and cheerful designs perfect for kids' rooms.

### Blackout roller blind (DKL)

- Fabric offers complete blackout
- Available with white or brushed aluminum side rails
- Available with manual operation

### Duo blackout roller blind (DFD)

- Two ways to control light in one solution – blackout the room completely or soften incoming light
- Available with white or brushed aluminum side rails
- Choose any Kids Collection blackout roller blind combined with white pleated blind (1016)
- Available with manual operation

### Installation

- Quick and easy installation with patented mounting brackets.

### White line blinds

- To order the blind with white side channels, simply add WL to the end of your product code.

### Certifications

- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances.

Most sold window sizes	CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08	
Sizes (w×h) cm	55×70	55×78	55×98	55×118	78×98	66×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140	
Manual DKL or DFD	Blackout	104	104	110	118	122	124	128	134	156	148	152	134	156	174
	Duo Blackout	128	128	134	146	148	152	158	168	194	184	190	166	194	220

All prices in EUR (€)  
Find all sizes and prices on [velux.ie/kids](http://velux.ie/kids)



## Colour options

### Standard colours



### Trend colours



## Installation

- Quick and easy installation with patented mounting brackets.

## White line blinds

- To order the blind with white side channels, simply add WL to the end of your product code.

## Certifications

- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances.

# Translucent pleated blind

Decorative blinds that are an elegant way to provide privacy whilst diffusing soft natural light into your room.

- Dual control bars allow you to adjust the blind from both the top and the bottom of the roof window, letting in exactly the right amount of light (manual version only)
- Available with white or brushed aluminum side rails
- Available in manual, mains or solar powered operation

Most sold window sizes		CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08
Sizes (w×h) cm		55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140
		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
Manual FHL	Standard	76	76	82	90	94	96	96	100	106	128	120	124	106	128	146
	Trend	90	90	96	104	108	110	110	114	120	142	134	138	120	142	160
Mains-powered FML	Standard	165	165	171	179	183	185	185	189	195	217	209	213	195	217	235
	Trend	179	179	185	193	197	199	199	203	209	231	223	227	209	231	249
Solar-powered FSL	Standard	173	173	179	187	191	193	193	197	203	225	217	221	203	225	243
	Trend	187	187	193	201	205	207	207	211	217	239	231	235	217	239	257

Mains-powered FML and solar-powered FSL can be combined with intelligent home control solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 21.


All prices in EUR (€)  
Find all sizes and prices on [velux.ie/FHL](http://velux.ie/FHL)





## Colour options

### Standard colours

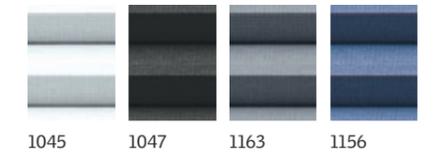

### Trend colours



## Blackout energy pleated blind

The unique design of these blinds provides up to 25% insulation all year round. Perfect for bedrooms that need blackout at night and extra insulation.

- Insulated for increased comfort
- Available with white or brushed aluminum side rails
- Available in manual, mains or solar powered operation

### Installation

- Quick and easy installation with patented mounting brackets.

### White line blinds

- To order the blind with white side channels, simply add WL to the end of your product code.

### Certifications

- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances.

Most sold window sizes		CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08
Sizes (w×h) cm		55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140
	Standard	100	100	106	118	120	124	124	130	140	166	156	162	138	166	192
	Trend	114	114	120	132	134	138	138	144	154	180	170	176	152	180	206
	Standard	189	189	195	207	209	213	213	219	229	255	245	251	227	255	281
	Trend	203	203	209	221	223	227	227	233	243	269	259	265	241	269	295
	Standard	197	197	203	215	217	221	221	227	237	263	253	259	235	263	289
	Trend	211	211	217	229	231	235	235	241	251	277	267	273	249	277	303

Mains-powered FMC and solar-powered FSC can be combined with intelligent home control solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 21.

All prices in EUR (€)  
Find all sizes and prices on [velux.ie/FHC](http://velux.ie/FHC)



## Colour options

### Standard colour



7001

### Trend colours



7057



7062



7063



7064



7065

## Installation

- Quick and easy installation with patented mounting brackets.

## White line blinds

- To order the blind with white side channels, simply add WL to the end of your product code.

## Details

- Unique and discreet tilt mechanism makes it very easy to tilt the slats.


# Venetian blind

The classic solution for light dimming and privacy. Perfect for bathrooms and kitchens.

- Moisture resistant
- Easy to clean
- Preserves your view while providing privacy
- Cordless operation
- Available with white or brushed aluminum side rails
- Available with manual operation
- Control the amount and direction of incoming light and shadows

Most sold window sizes	CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08	
Sizes (w×h) cm	55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140	
	Standard	100	100	106	118	120	124	124	130	140	166	156	162	138	166	192
	Trend	114	114	120	132	134	138	138	144	154	180	170	176	152	180	206


All prices in EUR (€)  
Find all sizes and prices on [velux.ie/PAL](http://velux.ie/PAL)

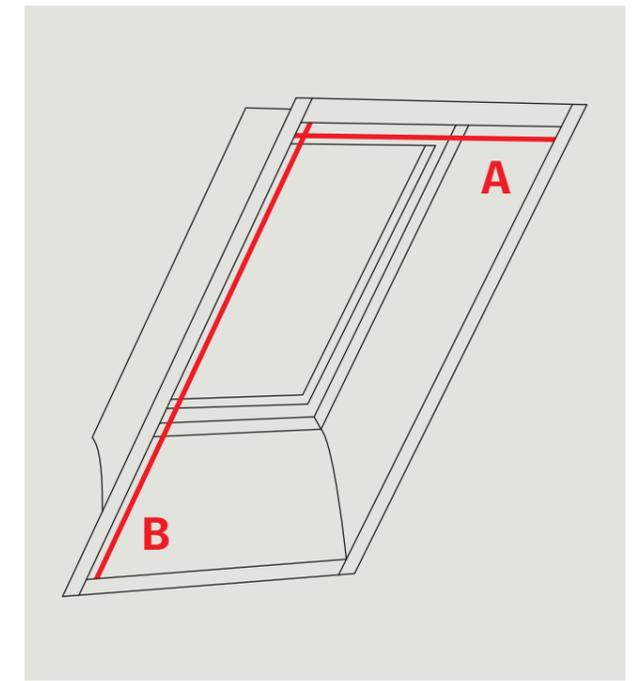

# Insect screen

Enjoy fresh air without unwanted visitors. The screen is simple to operate, and can be combined with any other VELUX interior or exterior blind. It has transparent net fabric and stows neatly away in the slim top casing when not in use.

- 100% insect-proof material
- Transparent net fabric does not obstruct your view
- Durable, wind-resistant fabric for long-lasting performance



## Determine the correct size

- Measure the inner wall width (A) and height (B) to find the size code and price of your insect screen in the table below
- If you have two heights (B) or heights above 2400 mm – two insect screens and one connector set Z0Z 157 SWL are needed.
- Watch a video on how to measure and determine the correct size at [velux.ie/ZIL](http://velux.ie/ZIL)
- **IMPORTANT:** Insect screen size codes may differ from window size code, please measure (A) and (B) and find correct size code in the table below before ordering.

## Installation


- Quick and easy installation.

	A						
	0-438 mm	439-530 mm	531-640 mm	641-760 mm	761-922 mm	923-1120 mm	1121-1285 mm
0-1600 mm	ZIL BK04 115	ZIL CK02 107	ZIL FK08 141	ZIL MK06 141	ZIL PK25 172	ZIL SK06 174	ZIL UK04 180
1601-2000 mm	SPECIAL ORDER -	ZIL CK06 126	ZIL FK08 141	ZIL MK06 141	ZIL PK06 154	ZIL SK06 174	ZIL UK10 216
2001-2400 mm	SPECIAL ORDER -	SPECIAL ORDER -	ZIL FK08 141	ZIL MK10 168	ZIL PK10 178	ZIL SK10 203	ZIL UK10 216

All prices in EUR (€)  
Find all sizes and prices on [veluxshop.ie](http://veluxshop.ie)



Anti-heat blind (MSU)




5070




Blackout blind (DSU)



4550

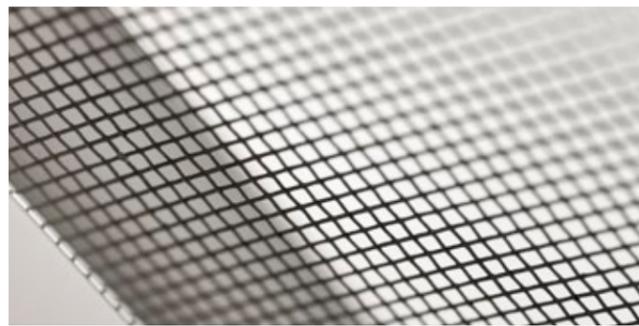

Insect screen (ZIU)



0000

## New generation

# For curved and flat glass rooflights

### Anti-heat blind

The anti-heat blind provides light dimming and heat protection to maintain a cool and comfortable room. The blind is discreetly placed inside the rooflight, and is easily installed from the roof when installing the window.

- Reduces overheating
- Semi-transparent fabric for light control and sky view
- Solar powered blind with remote control
- Not compatible with blackout blind

### Blackout blind


VELUX blackout blind for glass rooflights blocks outside light for total darkness, anytime and is perfect for bedrooms. It is discreetly placed inside the rooflight and easily installed from the roof when installing the window

- Perfect sleep – day or night
- 99.9% blackout
- Great for bedrooms and media rooms
- Solar powered blind with remote control
- Not compatible with anti-heat blind

### Insect screen

VELUX insect screen for glass rooflights lets you enjoy fresh air with a view to the sky without any insects. It comes in a contemporary white design, is easy to install and simple to remove for cleaning.

- Fresh air and 100% insect-proof
- Durable, transparent net fabric does not obstruct your view
- Can be combined with an anti-heat blind or a blackout blind

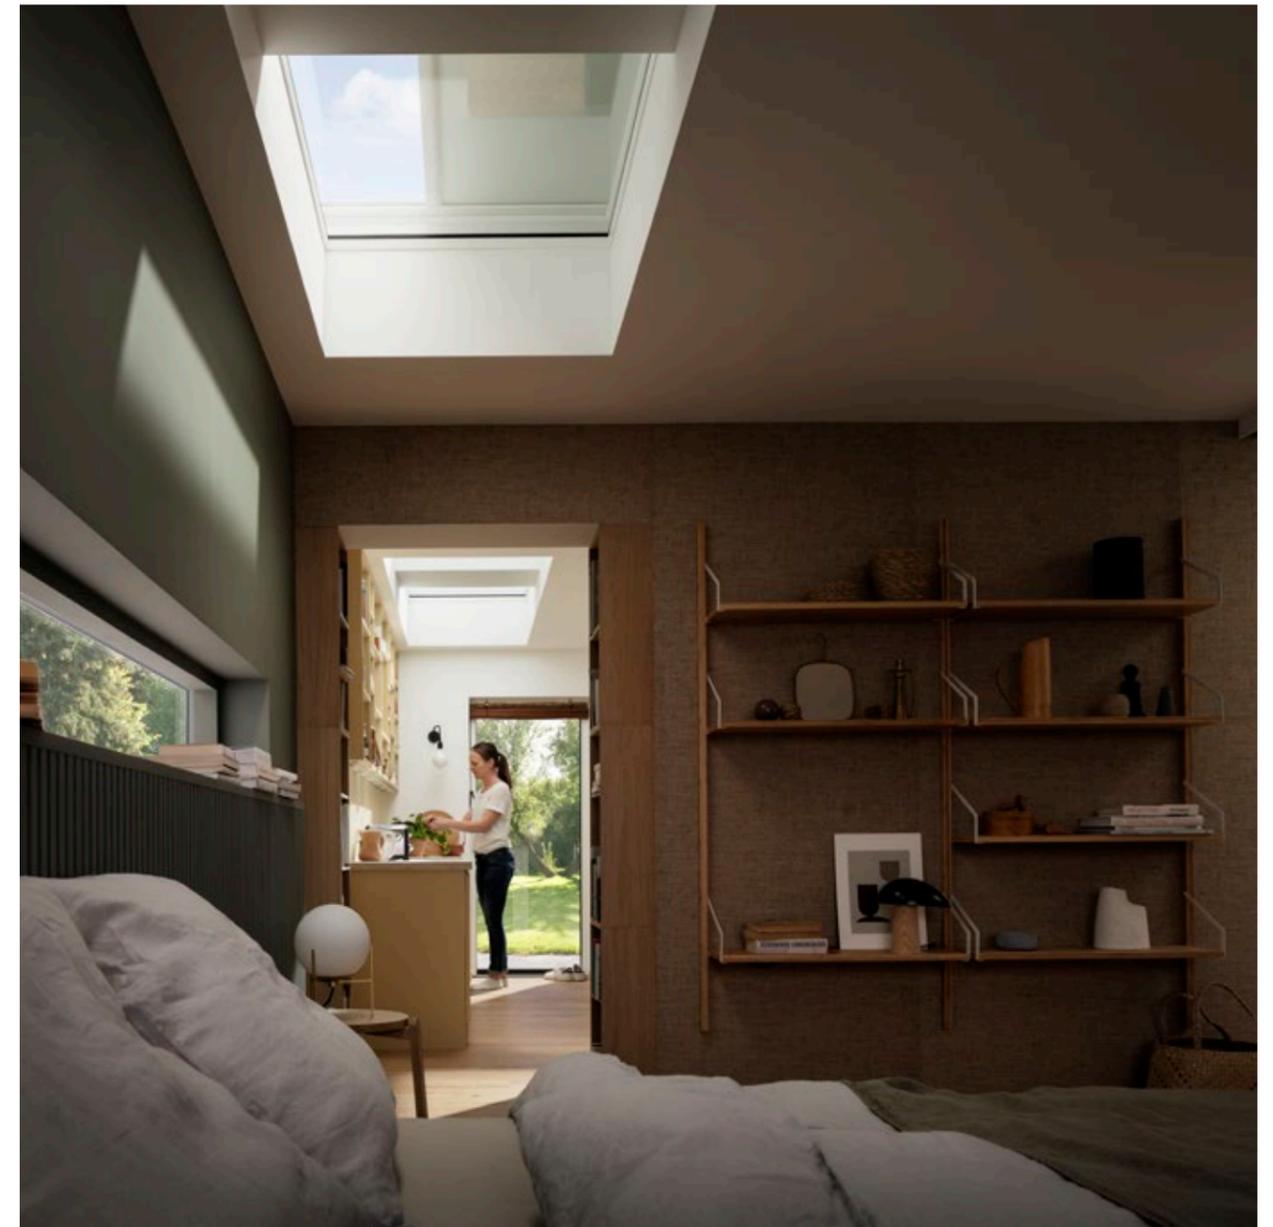

Blinds are placed inside the rooflight and mounting is therefore most convenient during the installation process.

		060060	080080	090060	090090	100100	120090	120120	150100	150150	200100	
Window size		60x60	80x80	90x60	90x90	100x100	120x90	120x120	150x100	150x150	200x100	
		<input type="checkbox"/>										
	Solar powered MSU	Anti-heat blind	322	336	329	343	350	357	364	371	438	459
	Solar powered DSU	Blackout blind	322	336	329	343	350	357	364	371	438	459
	Manual insect screen ZIU	Insect screen	74	77	76	79	81	82	84	85	101	105

Solar powered MSU and DSU can be combined with our intelligent home control solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 21. New sizes available from summer 2022. ZIU Insect Screen available from April 2022.

All prices in EUR (€)  
Find all sizes and prices on [veluxshop.ie](http://veluxshop.ie)




### Anti-heat blind



6090



### Translucent pleated blind

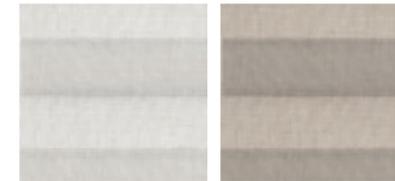


1016

1259



### Blackout energy pleated blind

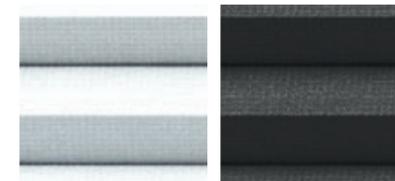

1045

1047



## For dome with glazing\*

### Anti-heat blind

VELUX anti-heat blind provides light dimming and heat protection so your indoor temperature stays cool and comfortable. This makes it perfect for living rooms with activity during the day. It is easy to install from the inside.

- Reduces solar heating
- Semi-transparent fabric lets in natural light
- Available in solar powered operation with app and remote control

### Translucent pleated blind

VELUX pleated blind for flat roof windows provides soft daylight control in a decorative folding design. It is the perfect choice for living rooms with activity during the day.

- Softly diffuses incoming natural light
- Available in mains powered operation with app and remote control
- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances

### Blackout energy pleated blind

VELUX blackout energy pleated blind for flat roof windows darkens the room and protects against cold. This makes it the ideal choice for bedrooms and living rooms.

- Light dimming and insulating effect
- Available in mains or solar powered operation with app and remote control
- OEKO-TEX® Standard 100 certified (1076-184 DTI) – contains no harmful substances

		060060	060090	080080	090090	100100	090120	120120	100150	150150	
Window size		60x60	60x90	80x80	90x90	100x100	90x120	120x120	100x150	150x150	
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	Solar powered MSG	Anti-heat blind	307	314	320	327	330	340	347	353	-
	Mains powered FMG	Translucent pleated blind	281	287	293	299	302	311	317	323	-
	Mains powered FMK	Blackout energy pleated blind	290	296	302	308	312	321	327	333	393
	Solar powered FSK	Blackout energy pleated blind	311	318	325	331	335	345	352	358	422

\* Also compatible with Curved and Flat Glass roof windows bought before July 2021.

Solar powered MSG is not compatible with ISD 2093. Solar powered MSG and FSK and mains powered FMG and FMK can be combined with our intelligent home control solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 21.

All prices in EUR (€) Find all sizes and prices on veluxshop.ie



# Ordering and installing your VELUX blinds

Installing VELUX blinds requires no measuring, trimming, cutting or extra tools. They are made for a perfect fit, and everything you need is included in the package.

VELUX blind sizes match the roof window type and size. Locate these on the window type sign. See page 140.

Your VELUX roof windows have patented mounting brackets for your blinds. Simply click on the blind and add the supplied side rails.

Place your order on [veluxshop.ie](https://www.veluxshop.ie) or by speaking to one of our dealers or a customer service representative.





Keep your home cool  
on hot days with  
**VELUX** heat protection

# Outdoor protection, indoor comfort

Our wide range of VELUX exterior anti-heat solutions effectively help you to protect your home from overheating so you can enjoy a comfortable indoor temperature, even on the hottest days or nights. Many products can be installed from the inside by yourself or an installer. Discover the blind or shutter that best meets the needs for your home.



## Anti-heat blackout shutter

Heat protection, blackout and insulation

See more on page 129

Heat protection	● ● ● ●
Blackout	● ● ● ●
Insulation	● ●
Noise reduction	● ● ●
Prevents burglary	● ● ●



## Anti-heat blackout blind

Heat protection and blackout

See more on page 130

Heat protection	● ● ●
Blackout	● ● ●
Insulation	●
Noise reduction	●
Prevents burglary	●



## Anti-heat blind

Heat protection and transparency

See more on page 131

Heat protection	● ● ●
Blackout	●
Insulation	
Noise reduction	
Prevents burglary	



0000

### Indoor climate

- Heat protection, blackout and insulation

Heat protection	● ● ● ●
Blackout	● ● ● ●
Insulation	● ●
Noise reduction	● ● ●
Prevents burglary	● ● ●

Read more about anti-heat blackout shutter specifications on [velux.ie/shutter](http://velux.ie/shutter)

# Anti-heat blackout shutter

Take full control of your indoor comfort with the superior heat protection and blackout offered by VELUX anti-heat blackout shutters. The ideal choice for complete, year-round protection. The sturdy exterior offers the very best outdoor protection.


- All-in-one protection
- Best heat protection and sun screening
- Total blackout
- Effective winter insulation
- Rain noise reduction
- Effective protection of roof window from break-ins
- Available in mains or solar-powered operation with remote control

Most sold window sizes	CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08
Sizes (w×h) cm	55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140
Mains-powered SML	406	406	434	448	462	466	466	484	512	558	554	562	498	580	650
Mains-powered SMH*	-	-	-	-	-	652	-	678	716	-	774	788	-	-	-
Solar-powered SSL	540	540	576	594	614	620	620	644	680	742	736	748	662	772	864

Window size	FFKF06 188×118	FFKF08 188×140
Solar powered SSLs for 3-in-1	1,956	2,034

\* SMH is designed for VELUX INTEGRA® top-hung roof windows. Mains-powered SML and SMH and solar-powered SSL are VELUX ACTIVE compatible. Read more about VELUX ACTIVE on page 25. SSL installed on VELUX INTEGRA® solar GGL/GGU in widths B---, C--- & F---, a ZOZ 246 kit is needed. SSLs for 3-in-1 available from summer 2022.

All prices in EUR (€)  
Find all sizes and prices on [velux.ie/shutter](http://velux.ie/shutter)



0000

### Indoor climate

- Heat protection and blackout

	Heat protection	● ● ●
	Blackout	● ● ●
	Insulation	●
	Noise reduction	●
	Prevents burglary	●

Read more about anti-heat blackout blind specifications on [velux.ie/SSS](http://velux.ie/SSS)



## Anti-heat blackout blind


Beat the heat with the VELUX anti-heat blackout blind that offers both great heat protection and blackout. This effective combo is ideal for those who want to keep comfortable indoors on hot days and sleep better on warm nights.

- Effective heat reduction
- Blackout effect
- Tough, durable polyester fabric
- Available in solar-powered operation with remote control
- Install from inside with or without professional help

Most sold window sizes	CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08
Sizes (w×h) cm	55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140
Solar-powered SSS	386	386	412	424	438	442	-	460	486	530	526	534	472	552	618
Window size													FFKF06 188×118	FFKF08 188×140	
Solar powered SSSS for 3-in-1													1,326	1,380	

Solar-powered SSS is VELUX ACTIVE compatible. Read more about VELUX ACTIVE on page 25. For old VELUX roof window generations (VES), a ZOZ 238 installation kit set is needed. For VELUX INTEGRA® GPU roof windows, a ZOZ 229S kit is needed. For VELUX INTEGRA® Solar GGL/GGU in widths B---, C--- & F---, a ZOZ 246 kit is needed.

All prices in EUR (€)  
Find all sizes and prices on [velux.ie/sss](http://velux.ie/sss)



5060

### Indoor climate

- Heat protection and transparency

	Heat protection	● ● ●
	Blackout	●
	Insulation	
	Noise reduction	
	Prevents burglary	

Read more about awning blind specifications on [velux.ie/awning](http://velux.ie/awning)



## Anti-heat blind

Keeps your indoors cool and comfortable all day with VELUX anti-heat blinds that block incoming heat before it hits your VELUX roof windows. The ideal choice for home offices or living rooms where you want cooler temperatures and reduce glare on sunny days.

- Effective heat reduction
- 14% transparency – lets in natural light and retains the view to the outside
- Available in manual, mains or solar-powered operation with remote control

Most sold window sizes	CK01 C01	CK02 C02	CK04 C04	CK06 C06	MK04 M04	FK06 F06	5	MK06 M06	MK08 M08	UK04 U04	PK08 P08	SK06 S06	PK04 P04	PK10 P10	UK08 U08
Sizes (w×h) cm	55×70	55×78	55×98	55×118	78×98	66×118	70×118	78×118	78×140	134×98	94×140	114×118	94×98	94×160	134×140
Manual MHL	56	56	56	56	70	64	70	70	70	96	80	90	80	80	96
Mains-powered MML	260	260	278	286	296	298	298	310	328	356	354	360	318	372	416
Solar-powered MSL	340	340	364	376	388	392	392	406	430	468	464	472	418	488	546
Window size													FFKF06 188×118	FFKF08 188×140	
Solar powered MSLS for 3-in-1													1,173	1,221	

Mains-powered MML and solar-powered MSL are VELUX ACTIVE compatible. Read more about VELUX ACTIVE on page 25. For old VELUX roof window generations (VES), a ZOZ 238 installation kit set is needed. For VELUX INTEGRA® GPU roof windows, a ZOZ 229S kit is needed. MSL installed on VELUX INTEGRA® solar GGL/GGU in widths B---, C--- & F---, a ZOZ 246 kit is needed.

All prices in EUR (€)  
Find all sizes and prices on [velux.ie/awning](http://velux.ie/awning)

# Accessories



## Accessories

Page 134

- Electric accessories
- Rod controls
- Locks and restrictors
- Maintenance kits
- Installation tools



KUX 110



KSX 100K



KLB 100



KLI 311, 312 and 313



KLF 200



KSX 100



ZCT 100 and ZCT 200K



ZOX 085



ZOX 012K1



ZOX 010KC S011



ZZZ 129KI and ZZZ 130KI



ZZZ 131KI



ZZZ 176KI



ZZZ 258

## Roof window accessories

### Electric accessories

#### Power supply KUX 110

Power supply for remote operation of VELUX electric anti-heat shutters and blinds or interior blind on a manual roof window or fixed flat-roof window.

#### Upgrade kit KSX 100K

Complete solar powered upgrade kit for VELUX manual centre-pivot roof window. Upgrades manual roof windows to remote operation with no wiring needed. Includes rain sensor. For windows manufactured after February 2014. Not compatible with CK01, CK02, MK27, PK25 and SK01.

#### Battery back up KLB 100

The battery backup ensures that if there is a power outage, VELUX electric mains-powered windows are closed and VELUX electric mains-powered blinds/shutters raised. It is recommended for use in regions affected by frequent power failures.

#### VELUX Wall switch – roof windows KLI 311

The wireless wall switch KLI 311 lets you conveniently open, close and stop

VELUX solar powered and mains powered roof windows or VELUX roof windows that have been upgraded for electric or solar operation. One switch can be used to operate several roof windows.

#### VELUX Wall switch – interior sunscreening KLI 312

The wireless wall switch KLI 312 lets you conveniently open, close and stop VELUX solar powered and mains-powered interior blinds. One switch can be used to operate several blinds.

#### VELUX Wall switch – exterior heat protection KLI 313

The wall switch KLI 313 lets you conveniently open, stop and close solar- or mains-powered VELUX electric exterior anti-heat shutters and blinds. One switch can be used to operate several exterior blinds or shutters.

#### VELUX Interface KLF 200

KLF 200 is programable and can be used for operation of io-homecontrol® compatible electrical products via external control devices like switches and sensors (potential-free contacts). Can operate 5 products or 5 groups with

up to 200 electrical products. Can also be used as a io-homecontrol® repeater.

#### Upgrade kit KSX 100

Complete solar powered upgrade kit for VELUX manual centre-pivot roof window. Upgrades manual roof windows to remote operation with no wiring needed. Includes rain sensor. For windows manufactured between April 1986 and January 2014. Not compatible with M27, P25 and 425.

### Rod controls

#### Telescopic control rod ZCT 200K

The 100-180 cm expandable rod enables operation of VELUX manually operated centre-pivot roof windows, interior blinds and insect screens installed out-of-reach.

#### Control rod extension ZCT 100

Extension piece for telescopic control rod ZCT 200K, adding 100 cm to the up to 180 cm long telescopic control rod.

#### Interior blind adaptor ZOX 085

Adaptor to allow remote operation of interior blind by control rod ZCT 200K.

### Locks and restrictors

#### Security lock ZOX 012K1

Extra security lock for VELUX centre-pivot roof windows that prevents the roof windows from being opened from the inside without a key.

#### Opening Restrictor with key ZOX 010KC S011

Opening restrictor (safety latch) that prevents VELUX centre-pivot roof windows from opening more than 10cm. Suitable for roof windows of frame height 98cm and above.

### Maintenance kits

#### ZZZ 129KI

Professional repair kit designed to cover up marks and top finish scratches on VELUX white polyurethane roof windows.

#### ZZZ 130KI

Professional repair kit designed to repair marks and top finish scratches on VELUX white painted roof windows.

#### ZZZ 131KI

Care kit for VELUX white painted roof windows. Includes special cleaner for removal of oil and grease, protector to restore the water-repellent surface and an application sponge.

#### ZZZ 176KI

Professional repair kit designed to repair marks and top finish scratches on VELUX clear lacquered roof windows.

### Installation tools

#### ZZZ 258

The VELUX Protect Tool consists of 3 flexible, rubber profiles that are fitted onto the bottom and side frames to prevent the sash from making marks in the window during installation. Can be used with VELUX sloping roof window types and sizes.

### Electric accessories

KUX 110	134
KSX 100K	292
KSX 100	292
KLB 100	199
KLI 311	24
KLI 312	24
KLI 313	24
KLF 200	152

### Rod controls

ZCT 100	20
ZCT 200K	34
ZOX 085	8

### Locks and restrictors

ZOX 012K1	59
ZOX 010KC S011	59


### Maintenance kits

ZZZ 129KI	15
ZZZ 130KI	15
ZZZ 131KI	35
ZZZ 176KI	15

### Installation tools

ZZZ 258	26
---------	----

All prices in EUR (€)  
Find all sizes and prices on [velux.ie](http://velux.ie)

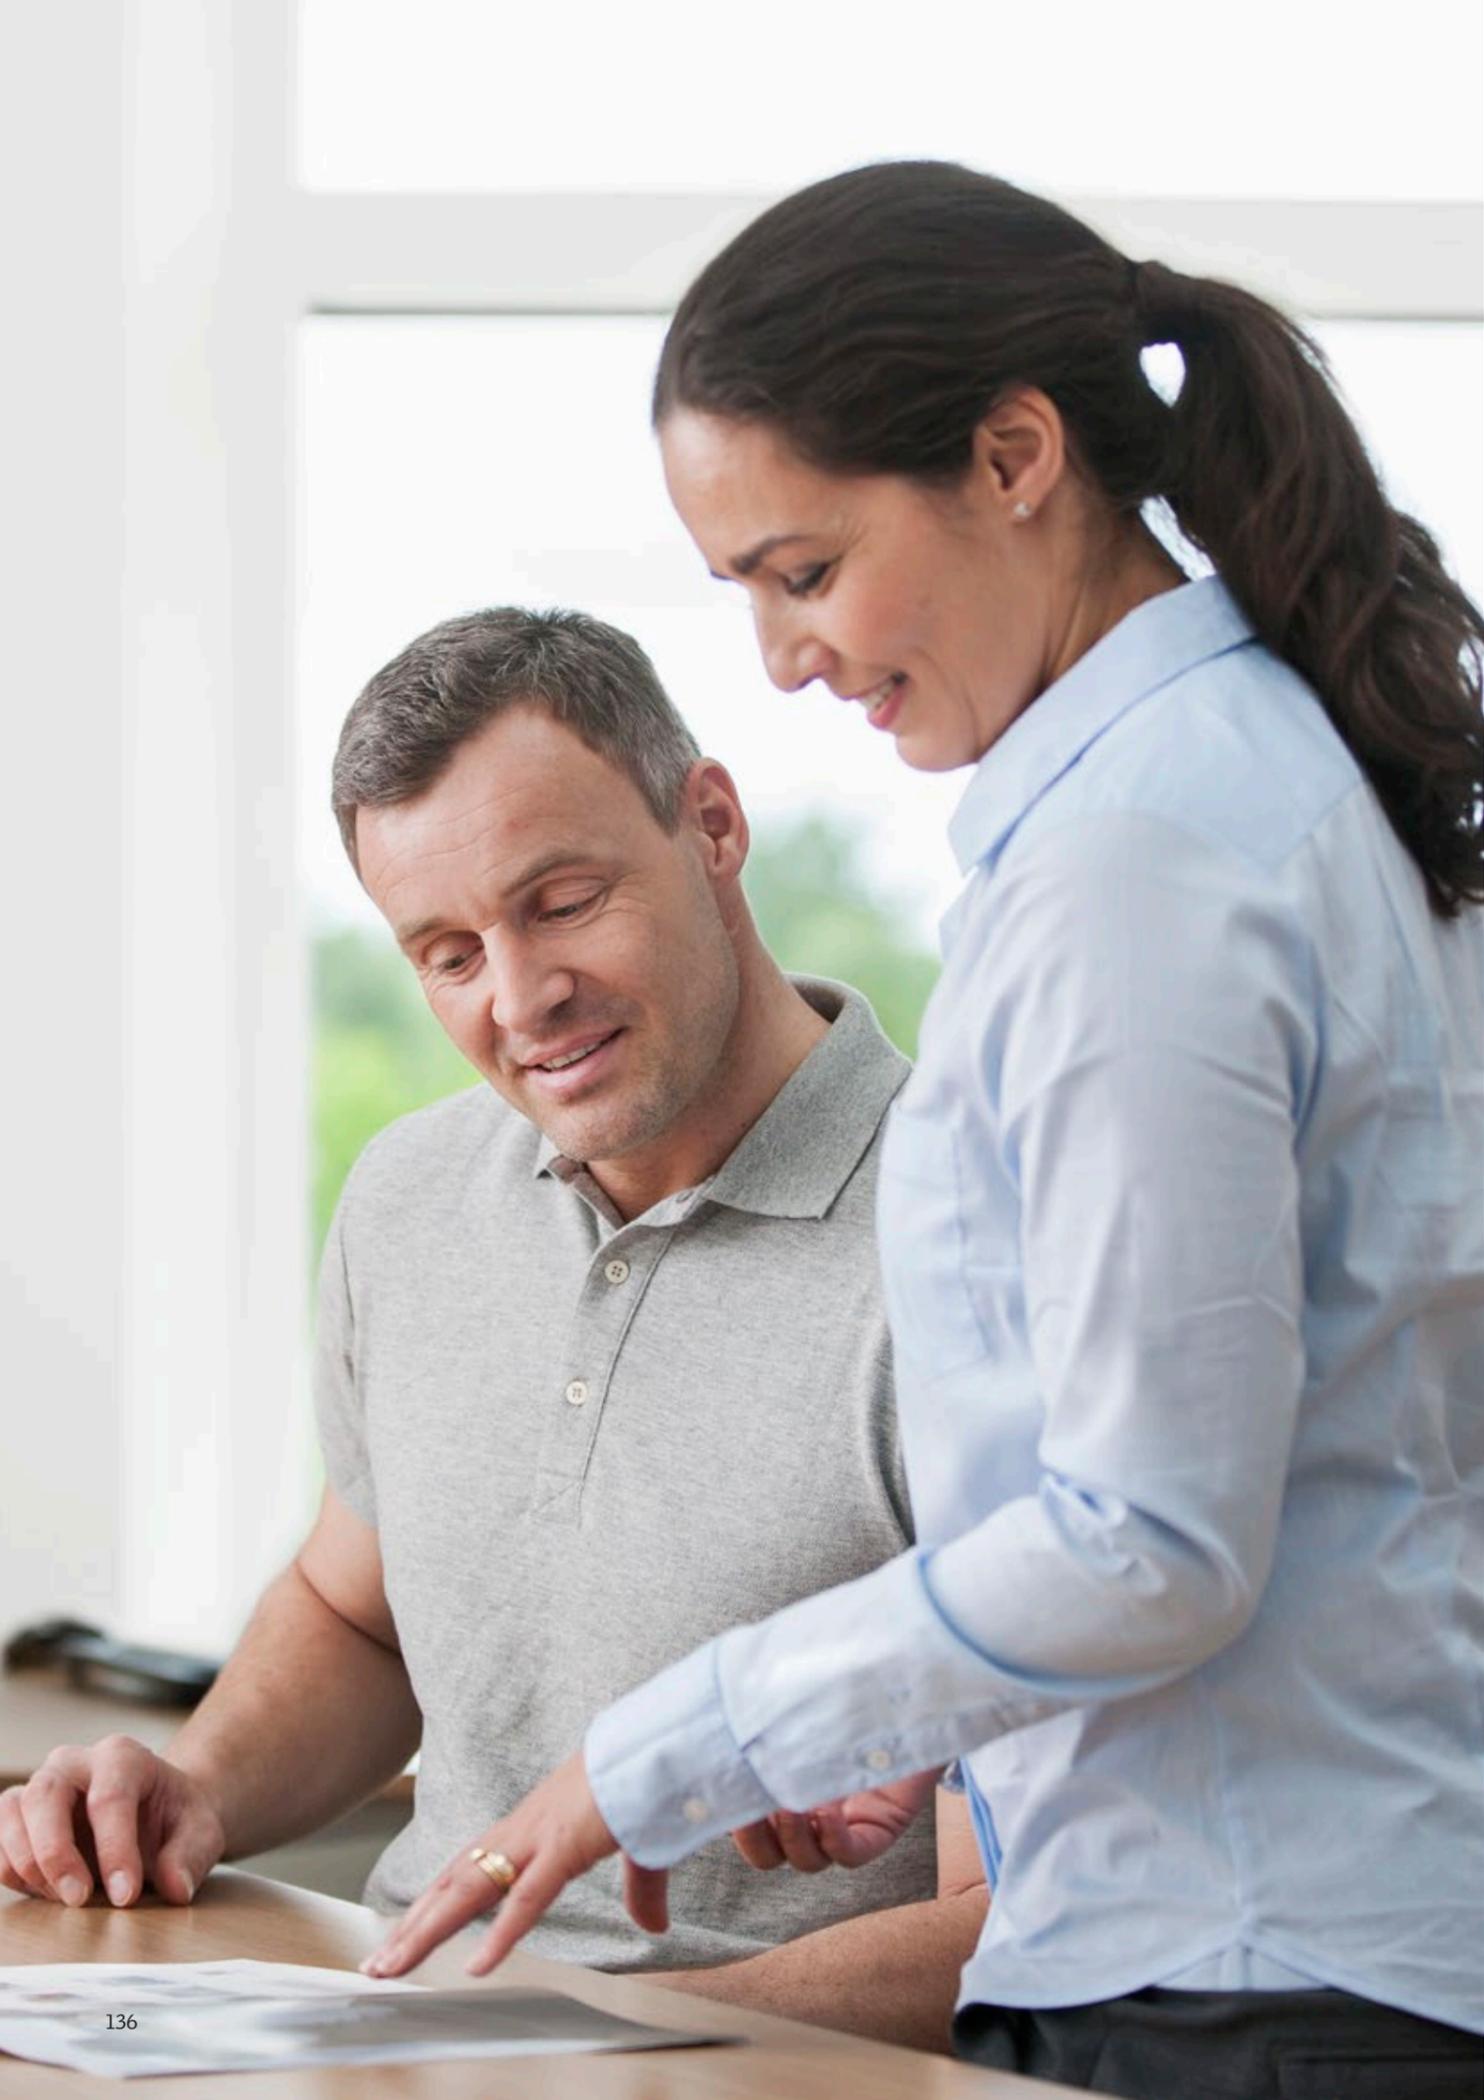

# Practical information

---

## Practical information

Page 138

VELUX installation training  
Dealer information  
After sales service  
VELUX Rewards  
Online professional tools  
Guarantees

---

## Size and replacement

Page 140

Roof window replacement  
The VELUX product code system

# Practical information



## VELUX installation training

We offer different training formats to suit your business needs. You can attend our installation and product courses online via the VELUX Online Training Academy, at our training facilities, or our mobile training unit can visit your site for tailor-made training for your team (subject to terms).

Find out more at [velux.ie/training](https://velux.ie/training)

Interested in becoming a VELUX Certified Installer? Go to [velux.ie/certified](https://velux.ie/certified) to find out more information



## Dealer information

The easiest way to place a merchant order is via our Dealer Extranet or EDI platforms. VELUX Dealer Extranet offers a number of additional features, such as creating quotes, client quotes, delivery track and trace, return requests and much, much more.

Access Dealer Extranet [dealerextranet3.velux.ie](https://dealerextranet3.velux.ie)

EDI (Electronic Data Interchange) may be a suitable option for merchants who place a large number of orders each month. VELUX can accommodate a number of different EDI formats.

To explore options, please email: [Etrading@velux.ie](mailto:Etrading@velux.ie) with your requirements.



## After sales service

Whether you want to get installation advice, ask a question about a specific product or get tips for your construction project, the VELUX Customer Care team is here to help:

**Business customers**  
01 816 1620

**Homeowners**  
01 816 1620

**Project support**  
01 816 1603



## VELUX Rewards

You can earn rewards with a large range of VELUX products all year round! Simply sign up for a VELUX Rewards account and upload invoices for any qualifying products. Once approved, your account will be credited with points that you can spend with our large range of top-brand partners. With between €4 - €36 Rewards available on most products, your points can really add up, so make sure you claim every time! Terms and conditions apply.

Register at [velux.ie/rewards](https://velux.ie/rewards)



## Online professional tools

The VELUX website contains everything you need to know about our products and installation. The latest product information, installation instructions and a number of visualisation tools can be found online.

See all tools and resources at [velux.ie/professional](https://velux.ie/professional)



## Guarantees

All VELUX products and accessories are thoroughly tested to deliver the high quality you expect. In the rare event that your VELUX product doesn't meet your expectations, we offer the following guarantees:

**10-year**  
VELUX pitched and flat roof windows, sun tunnels and sealing products

**3-year**  
Electric or solar external blinds and awnings

**3-year**  
Interior blinds and Insect screen, external shutters and blinds, motors and accessories for electric and solar products

**2-year**  
Roof windows for uninhabited spaces

In addition, we ensure that spare parts are available for products that are up to 25 years old.



# Roof window replacement

Replacing a VELUX roof window is easier than you think. It can be done in as little as 4 hours, and it allows for improved energy efficiency, a better indoor climate and more daylight and fresh air.

- Same standard VELUX sizes available
- Usually fitted quickly and easily from the inside
- Minimal mess and disruption to internal finish

## How to locate the window type and size

The same standard sizes are still available today and there are plenty of opportunities for upgrading. Flashing for replacements can be found on page 100.

For advice on what type of operation and finish of roof window to select go to page 8.

Find a VELUX Certified Installer near you: [velux.ie/findinstaller](http://velux.ie/findinstaller)



# The VELUX product code system

All VELUX products use the following classification code system:

**GGL MK06 2070 21**

Window type	GGL	MK06	2070	21
Window size	GGL	MK06	2070	21
Interior finish	GGL	MK06	2070	21
Exterior finish	GGL	MK06	2070	21
Glazing	GGL	MK06	2070	21
Operation	GGL	MK06	2070	21



**From 2012**

**1998-2011**

**1992-1998**

**Before 1992**

## Window types

GGU	Centre-pivot roof window in white polyurethane
GGL	Centre-pivot roof window in pine
GGLS	Centre-pivot 3-in-1 roof window in pine
GPLS	Top-hung 3-in-1 roof window in pine
GPU	Top-hung roof window in polyurethane, 45°
GPL	Top-hung roof window in pine, 45°
GIU	Sloping extension window element in polyurethane
GIL	Sloping extension window element in pine
VIU	Fixed vertical extension window element in polyurethane
VFE	Openable vertical window element in pine, tilt inwards
VFA	Openable vertical window element in pine, tilt and turn inwards/left-hinged
VFB	Openable vertical window element in pine, tilt and turn inwards/right-hinged
GDL	VELUX CABRIO® roof balcony in pine
GEL	Top-hung roof terrace section in pine
VEA	Left-hinged vertical roof terrace section in pine
VEB	Right-hinged vertical roof terrace section in pine
VEC	Fixed vertical roof terrace section in pine
GVT	Side-hung craftsman's roof exit for uninhabited rooms (black polyurethane)
TWF/TLF	Flexible sun tunnel
TWR/TLR	Rigid sun tunnel
CVU	Electric flat-roof window
CFU	Fixed flat-roof window
CSP	Flat-roof smoke ventilation window
CXP	Flat-roof exit window, 60°

## Window size

See all sizes on VELUX size and compatibilities chart on page 142

Compatible roof windows, flashing frames, other built-in products and corresponding interior roller blinds are marked with a 'K' in the size code

## Interior finish

- 0 White polyurethane
- 2 White painted wood
- 3 Clear lacquered pine

## Exterior cover

- 0 Aluminium

## Glazing

- 70 2-layer glazing with rain noise reduction, laminated safety glass, UV protection and extra toughened glass
- 68 3-layer glazing for improved energy efficiency
- 66 3-layer glazing for high energy efficiency with easy to clean and anti-dew coatings
- 67 Our best performing 3-layer glazing delivering optimal energy efficiency and indoor comfort


## Operation

- 21U Mains powered roof window, VELUX INTEGRA®
- 30 Solar powered roof window, VELUX INTEGRA® Solar
- 40 Smoke ventilation

# Size and replacement

Looking to replace your existing VELUX roof window?  
Use the size guide to locate your current window code  
and the replacement code.


## Using our size guide

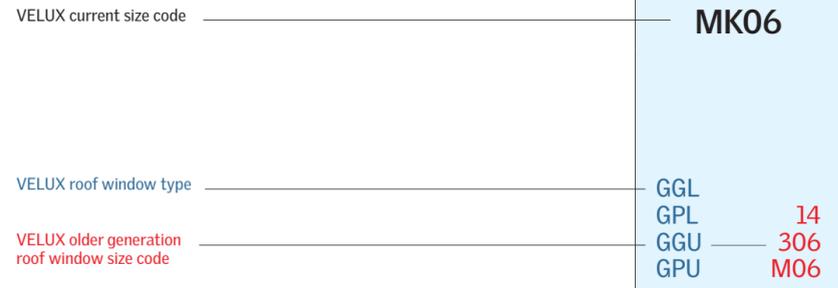


## Cold room windows

External frame sizes (w×h) mm	
460	540
610	GVK
830	103 GVT


## Flat roof sun tunnel 14", 350



## Sun tunnel 14", 350



## Sun tunnel 10", 250



FSC® certification supports good forest management where the health and safety of forest workers is secured and forest wildlife is well looked after.

## Roof windows


External frame sizes (w×h) mm						
	472 550 660 780 942 1140 1340					
550	PK25 GGL 425 P25					
624	MK27 GGL M27					
698	CK01 9 101 GGL C01	SK01 601 S01				
778	CK02 GGL 102 GGU C02					
978	BK04 GGL 6 104 GPU B04	FK04 GGL 204 GGU F04	MK04 GGL 1 304 GGU M04	PK04 GGL 31 404 GPL P04	UK04 GGL 7 804 GPL U04	
1178	CK06 GGL 6 206 GGU C06	FK06 GGL (5)* 206 GGU F06	MK06 GGL 14 306 GGU M06	PK06 GGL 406 GPU P06	SK06 GGL 4 606 GGU S06	UK06 GGL
1398		FK08 GGL 2 308 GGU F08	MK08 GGL 14 408 GPU M08	PK08 GGL 408 GPU P08	SK08 GGL 10 608 GGU S08	UK08 GGL 8 808 GPL U08
1600			MK10 GGL 13 310 GGU M10	PK10 GGL 410 GPU P10	SK10 GGL 610 GPU S10	UK10 GGL 810 GGU U10
1800			MK12 GGL 312 M12			

\* GGL 5 is 700mm wide


## Sloping extension elements

External frame sizes (w×h) mm				
	472 550 660 780 942 1140 1340			
920	MK34 GIL 334 GIU M34	PK34 GIL 434 GIU P34	SK34 GIL 634 GIU S34	UK34 GIL 834 GIU U34

## 3-in-1



## Roof terrace



## Flat roof windows

External frame sizes (w×h) mm						
	600 800 900 1000 1200 1500 2000					
600	060060 CFP CVP CFJ CVJ CFU CVU	090060 CFJ CVJ CFU CVU				
800		080080 CFP CVP CFJ CVJ CFU CVU				
900	060090 CFP CVP	090090 CFP CVP CFJ CVJ CFU CVU		120090 CFJ CVJ CFU CVU		
1000			100100 CFP CVP CXP CSP CFJ CVJ CFU CVU		150100 CFJ CVJ CFU CVU	200100 CFJ CVJ CFU CVU
1200		090120 CFP CVP CXP		120120 CFP CVP CXP CFJ CVJ CFU CVU		
1500			100150 CFP CVP		150150 CFP CVP CFJ CVJ CFU CVU	

Base unit height 150 mm: CFP, CVP, CXP, CSP, CFU, CVU, CFJ, CVJ  
Base unit height 300 mm: CFJ, CVJ  
CFJ/CVJ 200100 only base unit height 150 mm

## Vertical elements

External frame sizes (w×h) mm				
	780 942 1140 1340			
601	MK31 VFE 1/2-60 331 VIU M31	PK31 VFE 431 3-60 P31	SK31 VFE 631 4/10-60 S31	UK31 VFE 831 7/8-60 U31
955	MK35 VFE 1/2-95 334 VIU M34	PK35 VFE 434 3-95 P34	SK35 VFE 634 4/10-95 S34	UK35 VFE 834 7/8-60 U34
1155	MK36 VFE 1/2-115 336 VIU M36	PK36 VFE 436 3-36 P36	SK36 VFE 636 4/10-95 S36	UK36 VFE VIU
1375	MK38 VFE 338 3-38 VIU M38	PK38 VFE 438 3-38 P38	SK38 VFE 638 3-38 S38	UK38 VFE VIU

## VELUX CABRIO® balcony

External frame sizes (w×h) mm			
	780 942 1140		
2520	MK19 (MK10)	PK19 (PK10)	SK19 (SK10)
	(MK34)	(PK34)	(SK34)



VELUX Company Ltd  
Woodside Way  
Glenrothes  
Fife  
Scotland  
KY7 4ND

Tel: 01 816 1620

Email: [sales@velux.ie](mailto:sales@velux.ie)  
Website: [velux.ie](http://velux.ie)

- [facebook.com/VELUXGBI](https://www.facebook.com/VELUXGBI)
- [twitter.com/VELUXGBI](https://twitter.com/VELUXGBI)
- [pinterest.com/VELUXGBI](https://www.pinterest.com/VELUXGBI)
- [instagram.com/VELUX](https://www.instagram.com/VELUX)

**VELUX®**